



**AMERICAN SPECIALTIES, INC.**



441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: **0458-2**

ISSUED: 1-87

REVISED: 9-04

## SEMI-RECESSED WASTE RECEPTACLE

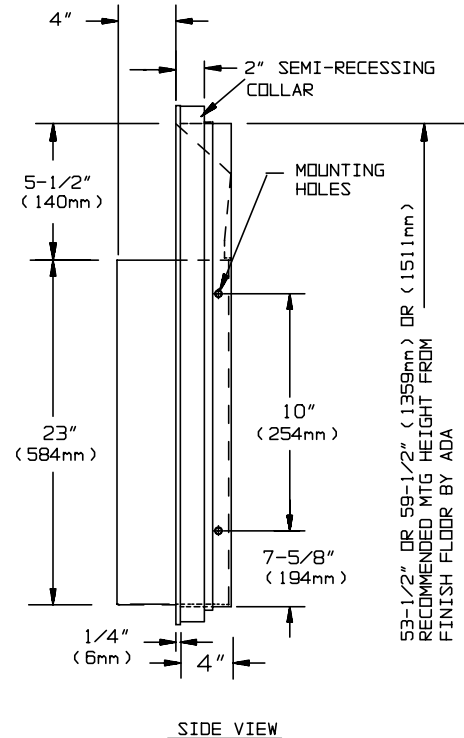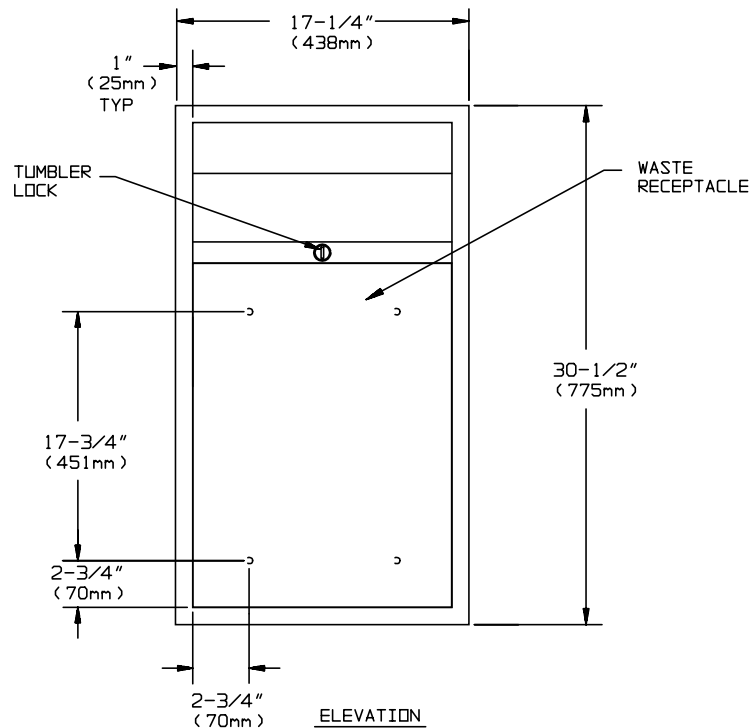

53-1/2" OR 59-1/2" (1359mm) OR (1511mm)  
RECOMMENDED MTG HEIGHT FROM  
FINISH FLOOR BY ADA

### SPECIFICATION

Semi-Recessed Waste Receptacle shall have a capacity of 12 gal (46 litres). Frame, waste container and cabinet shall be fabricated of alloy 18-8 stainless steel, type 304, 22 gauge. Waste container shall have hemmed edges for safety and shall be retained by a tumbler lock keyed alike to other ASI washroom equipment. Face trim shall be 1" (25.4mm) wide formed from one piece with no miters, welding or open seams and have 1/4" (6.35mm) square return to wall. Structural assembly of all components shall be of welded construction. All exposed surfaces shall be N° 4 satin finish and be protected during shipment with a PVC film easily removable after installation. . Unit shall be supplied with SR collar to convert to semi-recessed mounting.

**Semi-Recessed Waste Receptacle shall be Model N° 0458-2 as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913**

### INSTALLATION

Unit is semi-recessed in wall using N° 10 self tapping screws (by others) through concealed mounting holes provided. Note that top of rough wall opening is 3/4" (19mm) below top of unit. SR collar is installed on cabinet prior to mounting in wall recess following procedure described on SR Collar Data Sheet.

**Rough Wall Opening(RWO) required is .....15-3/4"W. x 29"H. x 2" D.(400mm x 737mm x 51mm)**

### OPERATION

Waste container is emptied manually on cycle determined by maintenance requirements. Keyed tumbler lock prevents unauthorized removal.

**Accessory Specialties**

**AMERICAN DISPENSER**

**Desert Ray Products**

**WATROUS INC.**