


	MODEL No:	111
	ISSUED:	10-91
I	REVISED:	7-92

TOILET PAPER HOLDER

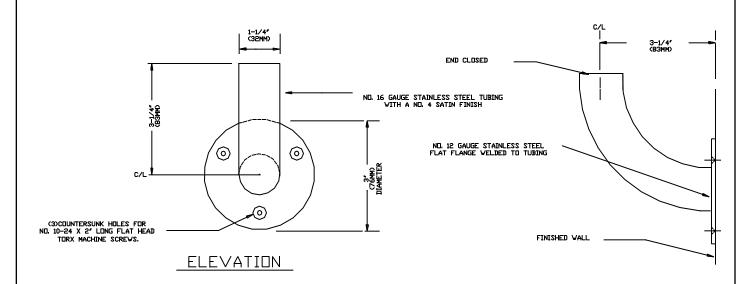

SIDE VIEW

SPECIFICATION

Toilet Paper Holder shall be fabricated of alloy 18-8 stainless steel, type 304. Wall flange shall be N° 12 gauge and tubing shall be N° 16 gauge. Tubing shall be welded to flat flange with continuous bead. All exposed surfaces shall have N° 4 satin finish. Flat flange shall have three (3) countersunk mounting holes that shall accommodate 10-24 x 2" long Torx® flat head machine screws (supplied).

Toilet Paper Holder shall be Model № 111 as fabricated by American Specialties Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

For compliance with ADA Accessibility Guidelines, install unit so that top of paper holder is between 19"(483mm) minimum above finished floor (AFF) to 44"(1118mm) maximum AFF and leading edge of roll is no farther than 36"(914mm) from back wall behind commode. Recommended mounting height is 32"(813mm) minimum AFF. Surface mount unit to finished wall with three (3) 10-24 x 2" long Torx® flat head machine screws (supplied) into suitable prepared mountings (by others) or other suitable mounting hardware (by others) to suit wall conditions.

OPERATION

One roll of toilet paper is placed over the horn type holder for use as required. Toilet paper is replenished on a cycle determined by maintenance needs.

Accessory Specialties

AMERICAN DISPENSER

Desert Rau Products

WATROUS INC.