

Adjustable tilt mirror with welded corners:

☐ Model 782-XXXX (Specify width and height)

Product Materials

FRAME: one-piece roll-formed stainless steel, 3/4" x 3/4" angle with corners welded, ground and polished smooth to a satin finish. Double strength continuous integral stiffeners on all sides for added strength. Bevel on front of angle secures frame flush against mirror. Two 1/4" barrel butt hinges welded to bottom of frame.

BACK: galvanized steel, secured to frame with concealed screws.

MIRROR: first quality 1/4" float glass, triple-silver-plated with electro-copper-plated layer and thermosetting infrared-cured paint backing with Poly-Glaze protective finish. Manufactured in accordance with ASTM C 1036. The back of the mirror is protected by a sheet of 1/4" extruded polystyrene, which is placed between the mirror and the galvanized steel.

SUPPORT BRACKETS: heavy gauge stainless steel, electro-polished. Self-locking brackets securely riveted to frame.

Optional Features

| Features | Suffix |
|--|--------|
| <input type="checkbox"/> 1/4" tempered glass mirror in lieu of polished float glass mirror* | -2 |
| <input type="checkbox"/> Laminate glass | -3 |
| <input type="checkbox"/> Highly polished No. 8 architectural finish, 20 gauge stainless steel in lieu of polished float glass mirror | -4 |
| <input type="checkbox"/> Bright annealed 20 gauge stainless steel in lieu of polished float glass mirror | -5 |
| <input type="checkbox"/> Plexiglass | -6 |

*Either the Length (L) or the Width (W) must be greater than 25".

- ☒ An inherent characteristic of a manufacturing process for tempered glass is distortion which may vary from mirror to mirror.
- ☒ Stainless steel mirrors will differ in optic quality from glass mirrors.
- ☒ In larger sizes, stainless mirrors are subject to distortion and/or "oil canning" for which Bradley Corporation cannot accept responsibility.

Installation

Verify all rough-in dimensions prior to installation. Secure lower hinges to wall with screws (included) at holes provided. Provide in-wall backing at mounting screw locations. Mount top brackets to permit full arm extension.

**Washroom Accessories
Document No. 8795**



Guide Specification

Adjustable tilt mirror shall be framed with heavy gauge, one-piece roll-formed 3/4" x 3/4" stainless steel angle with double strength continuous integral stiffeners. Welded corners shall be polished to a uniform satin finish. Mirror shall be of first quality 1/4" float glass guaranteed for 15 years against silver spoilage and protected by a shock-absorbing, waterproof filler with Poly-Glaze protective finish. Self-locking adjustable support brackets shall be polished stainless steel and riveted to frame.


Adjustable Tilt Framed Mirror shall be Bradley Model 782-_____ " W x _____ " H (specify width and height).

Model 782 series adjustable tilt mirrors can be fabricated to a maximum size of 36"W x 48"H.

ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.

Dimensions

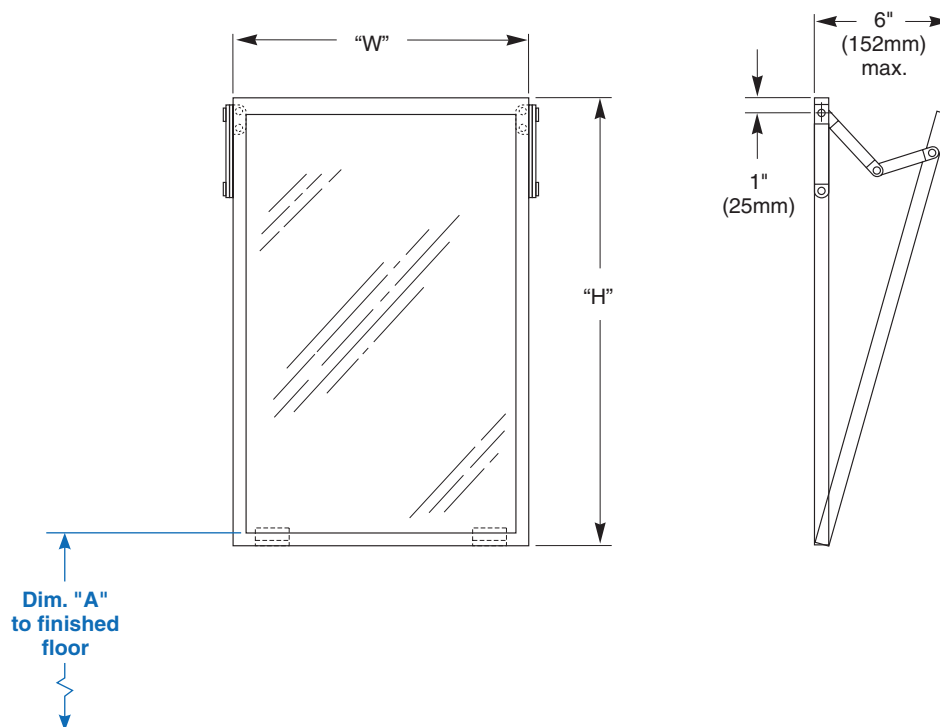

| Dim. "A" Key Surface: | For Dim. "A" | Bottom of Unit |
|--|---|----------------|
| Mirror's bottom edge of the reflecting surface to finished floor | 40" (1016mm) | 39¼" (997mm) |
| | 37" (940mm) | 36¼" (921mm) |
| | 34" (864mm) | 33¼" (845mm) |
| Rough wall opening: | | |
| Surface Mount: | No rough wall opening, see overall dimensions | |