



COL-6C-HN, COL-5C-HN, COL-4C-HN, COL-3C-HN, COL-2C-HN Barrier-Free Column Showers – 2-6 Person

Specifications

Construction & Materials

All exposed parts are type 304 stainless steel or polished chrome-plated brass. Drain fitting is cast iron and supply inlets are copper tubing. Internal manifold is cast brass. Grab bar is 18 gauge.

Standard Equipment

Column Shower

Constructed of type 304 stainless steel. Column and column cap are 16 gauge, and base flange is 14 gauge. Valve manifold is cast brass. Access panel located near bottom of column. Each station on column shower equipped with a stainless steel soap tray.

Valve Type as Selected

For more information on each valve type, please enter the model number in the search box at www.bradleycorp.com.

Showerhead

Standard fixed direction adjustable spray showerhead (S15).

Diverter Valve

Lever handle operation for easy transfer of water flow between fixed and hand-held shower spray.

Hand Shower

Consisting of hand shower with on-off control, a 60" stainless steel flexible hose and post style mounting bracket to hold to column. Elevated in-line backflow preventer with quick-disconnect for flexible hose.

Flow Control

A 1.5 GPM (5.7 LPM) flow control is standard. Actual flow may vary, but will not exceed 2.0 GPM (7.6 LPM) max.

Drain Fitting

Cast iron with five stainless steel mounting bolts.

Supply Inlets

Constructed of 3/4" type "L" copper tubing.

Grab Bar

Grab bar fabricated of 18 gauge 1-1/2" O.D. stainless steel tubing with a 1-1/2" safety statute clearance. Flanges are 11 gauge. Load capacity in excess of 300 lbs. Vertically mounted on column.

Optional Privacy Compartments

Partitions

Fabricated of 20 gauge 300 series stainless steel sheets polished to a #4 finish. Sandwich type construction with waterproof cores securely bonded between sheets. Partitions are secured to posts with 14 gauge type 300 stainless steel stirrups and stainless steel screws.

Posts

Fabricated 18 gauge 1-1/4" square x 80" stainless steel tubing. Post is secured to floor with an expansion anchor and a concealed foot angle which allows plus or minus 1/2" vertical adjustment.

Curtains


Curtain rails fabricated of 300 series #4 finish stainless steel cylindrical tubing. Curtain hooks are steel wire with a zinc chromate finish. Curtains are 60" W x 74" H and fabricated of heavy gauge translucent vinyl with hemmed edges and aluminum grommet reinforced eyelets.

Hardware

All exposed fasteners are vandal-proof stainless steel. Post shoes are anodized aluminum and finished to match stainless steel.



This shower complies with most, but not all, ADA dimensional requirements. Check local codes prior to installation.

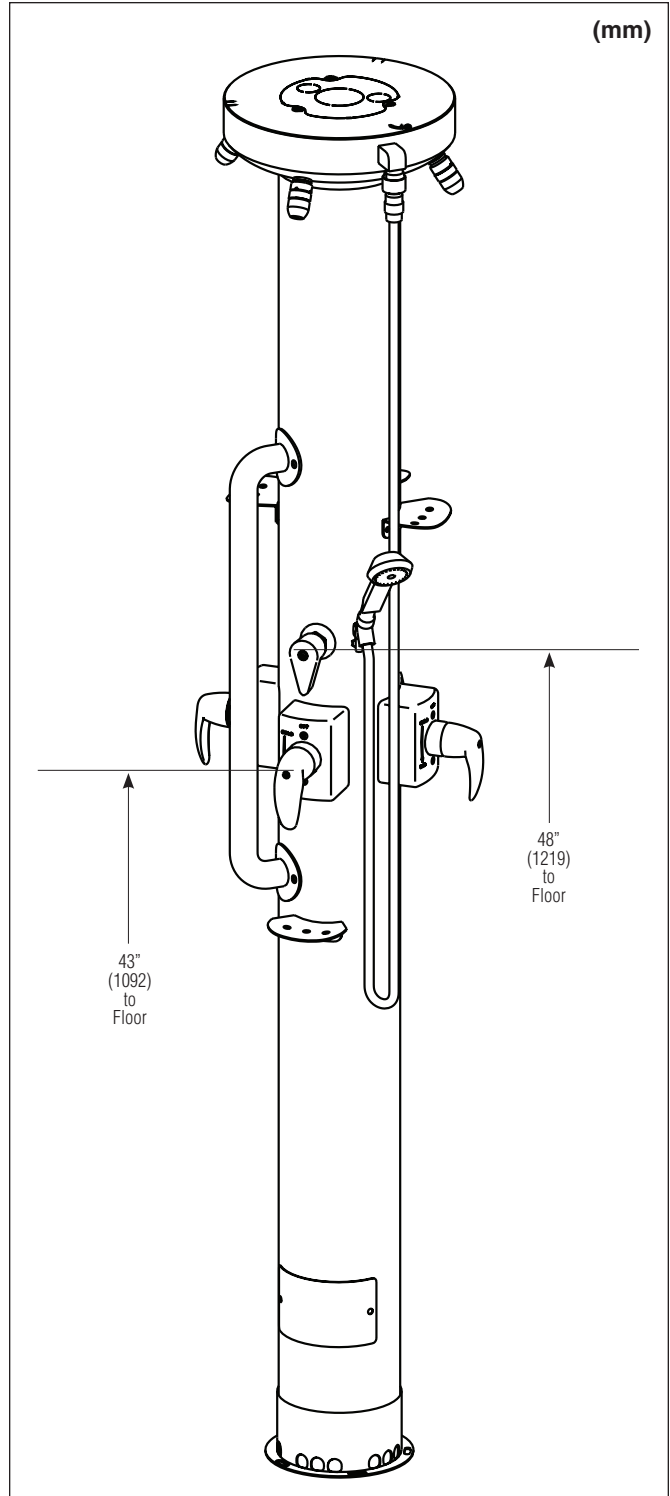



COL-6C-HN, COL-5C-HN, COL-4C-HN, COL-3C-HN, COL-2C-HN Barrier-Free Column Showers – 2-6 Person

Model No. (select one)		
Description	Stations	Handicap Stations
<input type="checkbox"/> COL-6C-HN 6-Person Column Shower	6	1
<input type="checkbox"/> COL-5C-HN 5-Person Column Shower	5	1
<input type="checkbox"/> COL-4C-HN 4-Person Column Shower	4	1
<input type="checkbox"/> COL-3C-HN 3-Person Column Shower*	3	1
<input type="checkbox"/> COL-2C-HN 2-Person Column Shower*	2	1
Standard Selections (Must select one from each category)		
Drain Type (select one)		
<input type="checkbox"/> A Off-line vent with supplies from below		
<input type="checkbox"/> B Centrally rising vent with supplies from above		
<input type="checkbox"/> H Centrally rising vent with supplies from below		
<input type="checkbox"/> O Off-line vent with supplies from above		
Showerhead Height (select one)		
<input type="checkbox"/> 6'-0" Standard Height		
<input type="checkbox"/> 5'-6" Juvenile Height		
Valve Type (select one)		
<i>Hot/Tempored and Cold Supplies</i>		
<input type="checkbox"/> EF Equa-Flo Pressure Balancing Valve		
<input type="checkbox"/> HD Equa-Flo HD Pressure Balancing Valve		
<input type="checkbox"/> TMV Thermostatic Mixing Valve		
<input type="checkbox"/> HC Hot and Cold Compression Valve*		
<i>Single Tempored/Cold Supply</i>		
<input type="checkbox"/> AST Air Pushbutton		
<input type="checkbox"/> SVL Single Compression Valve		
<input type="checkbox"/> TTPA TouchTime Pushbutton**		
<input type="checkbox"/> TTPB TouchTime Piezo Switch**		
Showerhead Type		
<input type="checkbox"/> S15 Standard Showerhead (Flow Rate = 1.5 GPM/5.7 LPM)		
<input type="checkbox"/> SX15 Severe Service Showerhead (Flow Rate = 1.5 GPM/5.7 LPM)		
<input type="checkbox"/> S20 Standard Showerhead (Flow Rate = 2.0 GPM/7.6 LPM)		
<input type="checkbox"/> SX20 Severe Service Showerhead (Flow Rate = 2.0 GPM/7.6 LPM)		
<input type="checkbox"/> SF Deluxe Showerhead w/ Ball Joint (Flow Rate = 1.5 GPM/5.7 LPM)		
<input type="checkbox"/> ES Economy Soft Flow w/ Ball Joint (Flow Rate = 2.0 GPM/7.6 LPM)		
<input type="checkbox"/> J Multi-Jet Showerhead w/ Ball Joint (Flow Rate = 1.5GPM/5.7 LPM)		
<input type="checkbox"/> LX Luxury Showerhead w/ Ball Joint (Flow Rate = 1.5GPM/5.7 LPM)		
<input type="checkbox"/> B Axis Showerhead w/ Ball Joint (Flow Rate = 1.5GPM/5.7 LPM)		

Optional Selections
Volume Control Type (select one)†
<input type="checkbox"/> AKV Allen Key Volume Control
<input type="checkbox"/> LHV Lever Handle Volume Control
<input type="checkbox"/> NONE No Volume Control
Ball Joint Type (select one)†
<input type="checkbox"/> LBJ Lockable Ball Joint
<input type="checkbox"/> NONE No Ball Joint
Supply Stop Type (select one)
<input type="checkbox"/> ST Stops in Supplies
<input type="checkbox"/> NONE No Supply Stops
Drain Variant Type (select one)
<input type="checkbox"/> D Standard Drain
<input type="checkbox"/> DG Dome Grate Drain
<input type="checkbox"/> LD Less Drain
Column Drain Slot Type (select one)
<input type="checkbox"/> WS With Column Drain Slots
<input type="checkbox"/> LS Less Column Drain Slots*
Clamping Ring Type (select one)‡
<input type="checkbox"/> CR Clamping Ring for Flashing
<input type="checkbox"/> NONE No Clamping Ring for Flashing
Flange Anchor Type (select one)
<input type="checkbox"/> FAK Flange Anchor Kit
<input type="checkbox"/> NONE No Flange Anchor Kit
Shroud Type (select one)
<input type="checkbox"/> SH Telescoping Shroud (floor to ceiling height _____ ft. _____ in.)*
<input type="checkbox"/> NONE No Shroud
Multi-Stall Partition Type (select one) §
<input type="checkbox"/> MS Multi-Stall Partitions
<input type="checkbox"/> NONE No Multi-Stall Partitions
Multi-Stall Curtain Type (select one) §
<input type="checkbox"/> CN Standard Curtain
<input type="checkbox"/> HR Herculite Curtain
<input type="checkbox"/> NONE No Multi-Stall Curtain
Multi-Stall Roller Hook Type (select one) §
<input type="checkbox"/> RH Roller Hooks
<input type="checkbox"/> NONE No Multi-Stall Roller Hook
Multi-Stall Robe Hook Type (select one) §
<input type="checkbox"/> BH Robe Hook
<input type="checkbox"/> NONE No Multi-Stall Robe Hook

*Non-cancelable, non-returnable

**TTPA and TTPB valves require a low-voltage UL/CSA listed 120VAC/12VDC plug-in adapter.

† Only available on S15 and S20 showerheads.

‡ Only available with Drain Variation D or DG.

§ Only available with COL-4C-HN.

Verify all rough-in dimensions prior to installation.

Consult local and national codes: conformity and compliance to local and national codes is the responsibility of the installer.

2.5 GPM showerhead flow rate does not meet California Energy Commission 20 CCR T.20, Div. 2, 1601-1609