



Modesty Module Showers

Models 4000 thru 4044

- Unit Complete with Curtain and Necessary Hardware for Installation
- Available with Column or Econowall Showers
- Showers Factory Assembled and Hydrostatically tested to 150 PSI
- Ready for Hookup to Plumbing Supplies



Signed approvals required prior to fabrication

Specifications

Materials

All exposed materials (except curtain, curtain hooks, and post shoes) are stainless steel polished to a #4 finish or chrome-plated brass.

Column Shower

Constructed of type 304 stainless steel polished to a #4 finish. Column and column cap are 16 gauge and base flange is 13 gauge. Drain fitting is cast iron with five stainless steel mounting bolts. Column is drilled and tapped to accept partition stirrups.

Econo-Wall Shower

Shower panel, mounting frame, and top and bottom covers constructed of 18 gauge stainless steel polished to a #4 finish. Stainless steel soap tray for each station mounted to panel. Standard fixed direction adjustable spray showerhead for each station.

Standard Equipment

Supply Inlets

Supply inlets are 3/4" type "L" copper tubing.

Partitions

Fabricated of 20 gauge 300 series stainless steel sheets polished to a #4 finish. Sandwich type construction with waterproof cores securely bonded between sheets. Standard partitions are 58" high.



Partitions are secured to column shower and posts with 14 gauge type 304 stainless steel stirrups and stainless steel screws.

Posts

Fabricated 18 gauge 1-1/4" square stainless steel tubing. Post is secured to floor with an expansion anchor and a concealed foot angle which allows plus or minus 1/2" vertical adjustment.

Seats

Wood seats are 10"W x 33-1/2"L x 16"H varnish finished oak.

Curtains

Curtain rails fabricated of aluminum rectangular tubing. Curtain hooks are steel wire with a zinc chromate finish. Curtains are 60"W X 74"H and fabricated of heavy gauge translucent vinyl with hemmed edges, and aluminum grommet reinforced eyelets.

Hardware

All exposed fasteners are vandal-proof and either stainless steel or chrome-plated. Post shoes are anodized aluminum and finished to match stainless steel.

Model HN 500

- Includes Mounting Kit for Barrier-Free Seat and Partition



Model HN500 Shower complies with most, but not all, ADA dimensional requirements. Check local codes prior to installation.

Specifications

Barrier-Free Seat Location

Available in a right or left-handed Barrier-Free seat location.

Construction

Materials

All exposed parts are type 304 stainless steel or polished chrome-plated brass. Drain fitting is cast iron and supply inlets are copper tubing. Internal manifold is cast brass. Grab bar is 18 gauge.

Standard Equipment

Column Shower

Constructed of type 304 stainless steel. Column and column cap are 16 gauge, and base flange is 13 gauge. Valve manifold is cast brass. Access panel located near bottom of column. Each station on column shower equipped with a stainless steel soap tray.

Showerhead

Standard fixed direction showerhead with adjustable spray.

Diverter Valve

Lever handle operation for easy transfer of water flow between fixed and hand-held shower spray.

Hand-Held Shower Spray

Constructed with a 60" stainless steel flexible hose and post style mounting bracket to hold to column. Elevated in-line backflow preventer with quick-disconnect for flexible hose.

Supply Inlets

Constructed of 3/4" type "L" copper tubing.

Flow Control

A 2.0 GPM flow control is standard. (Actual flow may vary, but will not exceed 2.5 GPM max.)

Grab Bars

Two grab bars fabricated of 18 gauge 1-1/2" O.D. stainless steel tubing with a 1-1/2" safety statute clearance. Flanges are 11 gauge. Load capacity in excess of 300 lbs.

Drain Fitting

Cast iron with five stainless steel mounting bolts.

Barrier-Free Seat

Reversible phenolic shower seat. Load capacity of 250 lbs. See technical data document 9027 for additional information.


Curtain & Hooks




Modesty Module Showers

Modesty Module Layouts


(Meters)




MM 4000




MM 4001




MM 4002

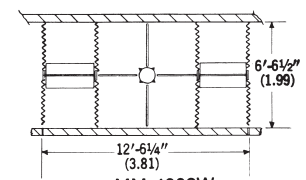


MM 4003W

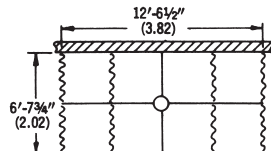


MM 4003

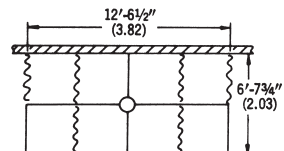


MM 4004

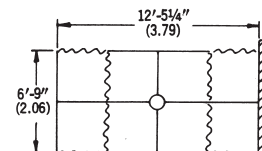


MM 4005

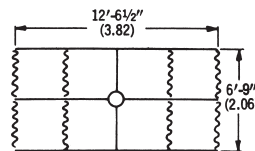


MM 4006

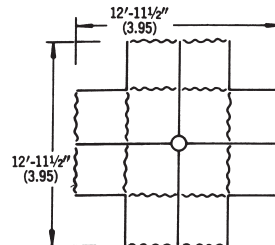


MM 4007

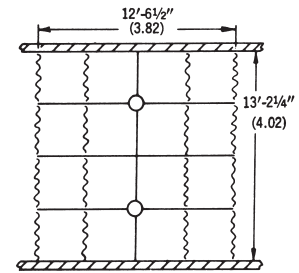


MM 4008

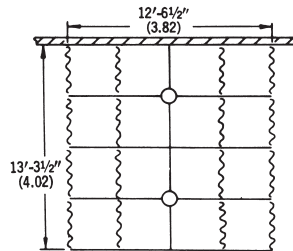


MM 4009

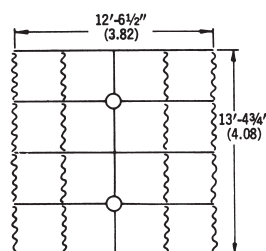


MM 4010

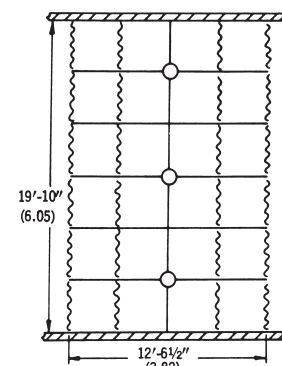


MM 4011

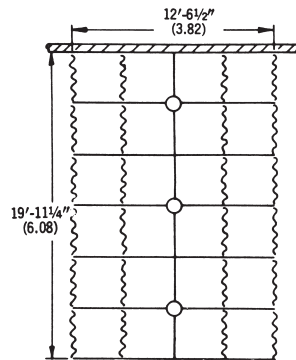

MM 4012

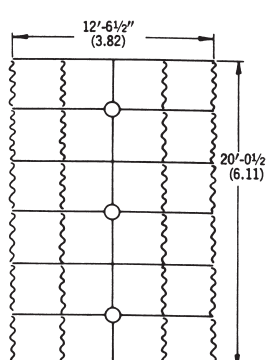

MM 4013

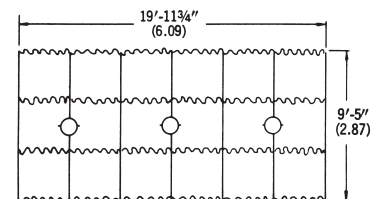

MM 4014



Modesty Module Showers

Modesty Module Layouts

(Meters)

