

## SURFACE-MOUNTED TOWEL BAR


7673 76737

**Specify Model Required:** 

☐ Model 7673☐ Model 76737

Bright polished stainless steel Satin-finish stainless steel



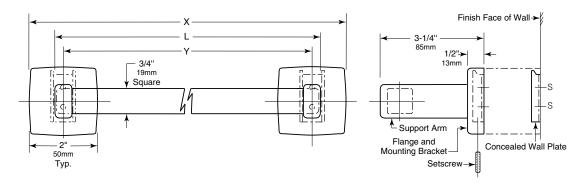

STANDARD	STOCK	SIZES
----------	-------	-------

Model No.	Bar Length L	Overall Length X	Centerline- to-Centerline Y
7673 x 18	18" (455mm)	19-5/8" (500mm)	17-5/8" (450mm)
76737 x 18	18" (455mm)	19-5/8" (500mm)	17-5/8" (450mm)
7673 x 24	24" (610mm)	25-5/8" (650mm)	23-5/8" (600mm)
76737 x 24	24" (610mm)	25-5/8" (650mm)	23-5/8" (600mm)

## **MATERIALS:**

**Flanges & Support Arms (2)** — 18-8, type-304, 22-gauge (0.8mm) stainless steel. Each flange has a concealed, 18-gauge (1.2mm) stainless steel mounting bracket. All-welded construction. Secured to wall plates with stainless steel setscrews. **Concealed Wall Plates (2)** — 18-8, type-304, 19-gauge (1.0mm) stainless steel.

Towel Bar — 18-8, type-304, heavy-gauge stainless steel. Seamless, 3/4" (19mm) square tubing.

## **INSTALLATION:**

To remove concealed wall plates from back of flanges and mounting brackets, loosen setscrews. Mount each wall plate so prongs are at top; secure with sheet-metal screws, furnished by manufacturer, at points indicated by an *S*. Engage mounting brackets onto prongs of wall plates, then secure unit into position by tightening setscrews at bottom of flanges.

Note: Centerline-to-centerline of concealed wall plates must be within 1/16" (1.6mm) of dimension (Y) shown in table above.

For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws furnished. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws furnished, or provide 1/8" (3mm) toggle bolts or expansion bolts.

## **SPECIFICATION:**

Surface-mounted towel bar shall be type-304 stainless steel with \_\_\_\_\_\_ (insert one: bright polished or satin) finish. Flanges and support arms shall be 22 gauge (0.8mm) and equipped with concealed, 18-gauge (1.2mm) mounting brackets that are secured to concealed, 19-gauge (1.0mm) wall plates with stainless steel setscrews. Towel bar shall be seamless, 3/4" (19mm) square tubing.

Surface-Mounted Towel Bar shall be Model \_\_\_\_\_ (insert model number) of Gamco Commercial Restroom Accessories, One Gamco Place, Durant, OK, 74701-1910