

► Description

Counter Top Basin Lavatory System can be equipped with Sloan® Sensor-Activated electronics. Constructed of durable SloanStone solid surface or natural stone, Both materials are available with our 20% or more post consumer recycled content.

► Specifications

The 30" Wall Mounted Console Unit includes:

- Dimensions: 30" x 22" x 4"
- A Monolithic Console, fabricated from SloanStone solid surface material
- Undermount White vitreous china lavatory
- Wall mounted carrier not supplied
- A high polished grid strainer provided
- Wall Mounted Console is ADA compliant if installed properly

Sloan Electronic Faucets features:

- Sloan Sensor Technology for reliable performance
- Hardwire or Battery powered
- Infrared or Capacitance
- Troubleshooting LED Indicator Lights
- Filtered Solenoid with serviceable Strainer Filter

Faucet features may vary. See faucet specification sheets for details

► Variations

- ESD - Electronic Soap Dispenser
- DS - Designer Stone (Quartz)
- FM - Frame
- AB - Angle Brackets
- ENC - Enclosure

► Colors

For a complete list of Corian colors see: <http://www.dupont.com/products-and-services/construction-materials/surface-design-materials/brands/corian-solid-surfaces/products/corian-all-colors.html>

For a complete list of Zodiac quartz colors: <http://www.dupont.com/products-and-services/construction-materials/surface-design-materials/brands/zodiaq-quartz-surfaces/products/zodiaq-all-colors.html>

For a complete list of Silestone quartz colors <http://www.silestoneusa.com/colors/>

► NOTE

DSCT dimensions can be customized per designer request. See your Sloan representative for details.



► The Counter Top Lavatory System

The Counter Top Basin design is an ergonomic hand washing basin, bringing higher efficiencies to the entire hand washing process in a more natural way. The Counter Top may be configured to designers specifications. Waste assembly is not provided. Choose from one of the many Sloan Optima® faucets for the perfect match.

► Compliance & Certifications



This space for Architect/Engineer Approval

► Faucet Options




Not All Faucet Models Shown

► OPERATION

As the user's hands enter the beam's effective range, the beam is reflected back into the sensor receiver and activates the solenoid valve allowing water to flow from the spout. Water will flow until user's hands are removed or until the time out limit is reached.



► ROUGH-IN

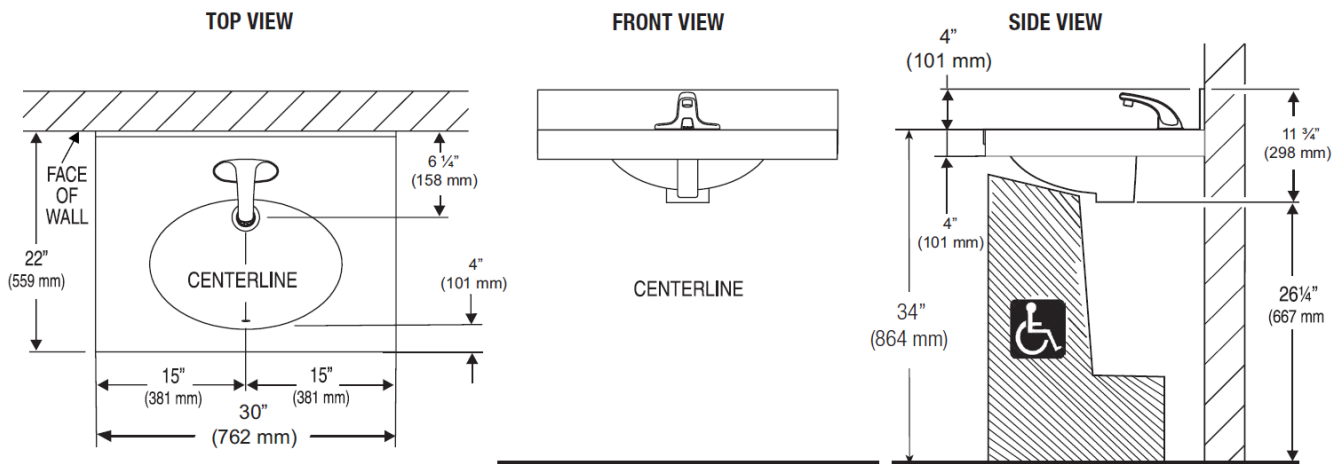

DSCT-81000 rough-in Shown with EBF-650 Faucet

► Code Number

15123061