

## DESCRIPTION

Complete rear spud ADA compliant floor mount vitreous china water closet.

### Flush Cycle

Model ST-2030-A-1.28 (1.28 gpf/4.8 Lpf)

Code: 2102030



## SPECIFICATIONS

### Water Closet


- Floor mount vitreous china
- Siphon jet flushing action
- ADA compliant
- 1½" I.P.S. rear spud inlet
- 2 1/8" trapway diameter
- Mounting hardware, carrier and toilet seat not included
- Integral flushing rim
- Elongated bowl
- Water spot area 9 1/2" x 8 1/4"
- ASME A112.19.2/CSA B45.1

### Colors/Finishes

- White

### Recommended Seats

- Bemis - 1955CT/1955SST & 2155CT/2155SST
- Church - 295CT/295SST & 2155CT/2155SST

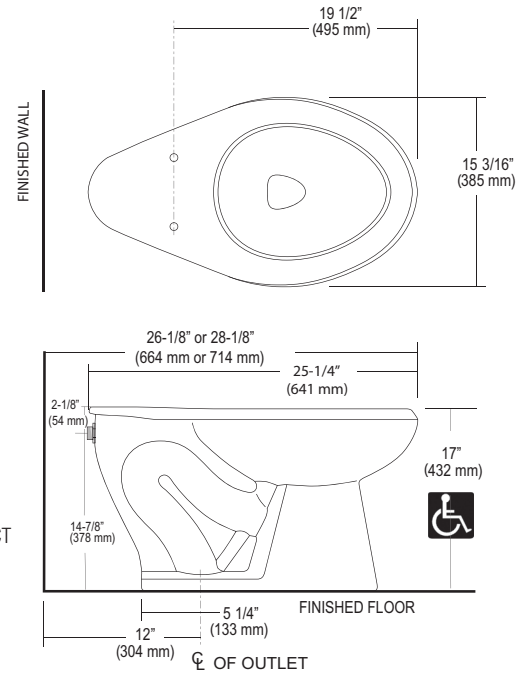

NOTE: All vitreous china dimensions shown in these drawings are nominal. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. Please take this into consideration when planning rough-in and plumbing layouts.

### Product Specification

Elongated water closet shall be made of vitreous china with a 1½" rear spud inlet. Bowl shall be installed at required height of 17" from floor to top of fixture for ADA compliance. Water closet shall be floor mounted with rear spud. Water Closet shall use 1.28 gpf / 4.8 Lpf. Water Closet shall be Sloan Model ST-2030-A-1.28.



Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

### NOTE: Plumbing System Requirements

- ✓ Minimum Flowing Pressure: 25 PSI
- ✓ Maximum Fixture Static Pressure: 80 PSI
- ✓ Minimum Flow Rate: 18 GPM



This space for Architect/Engineer approval	
Job Name	Date
Model Specified	Quantity
Variations Specified	
Customer/Wholesaler	
Contractor	
Architect	



Sloan Valve Company  
 10500 Seymour Avenue,  
 Franklin Park, IL 60131  
 Phone: 1-800-9-VALVE-9 (982-5839)  
 or 1-847-671-4300  
 Fax: 1-800-447-8329 or 1-847-671-4380  
 www.sloanvalve.com

Copyright © 2013 Sloan Valve Company  
 ST-2030 10-13