


# UPPERCUT

*The Fastest Way to Start Saving Water!*

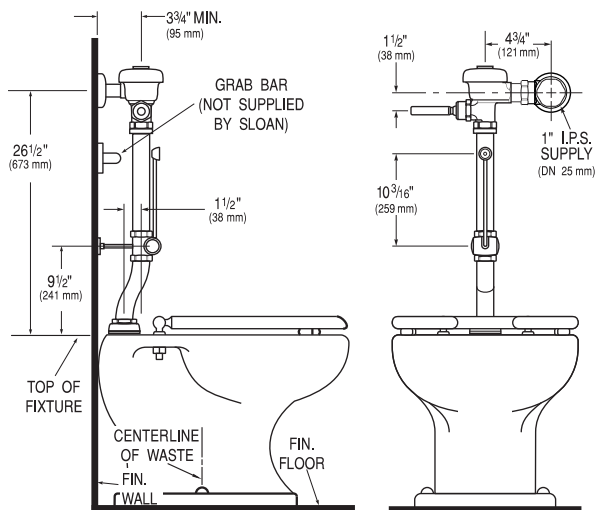

## Bedpan Washer Dual Flush Flushometer

WES  
BPW-1150

- **Description**  
Exposed Bedpan Washer Water Closet Flushometer with Dual Flush Feature, for floor mounted or wall hung top spud bowls.
- **Flush Cycle**  
Model WES BPW-1150-1.6/1.1 High Efficiency (DOWN - 1.6 gpf/ 6.0 Lpf, UP - 1.1 gpf/ 4.2 Lpf)
- **Specifications**  
Dual Flush, Quiet, Exposed, Diaphragm Type, Chrome Plated Closet Flushometer with the following features:
  - Lifting Handle UP initiates reduced flush (1.1 gpf/4.2 Lpf), eliminating liquid and paper waster, saving a ½-gallon of water
  - Pushing Handle DOWN initiates full flush (1.6 gpf/6.0 Lpf), eliminating all waste
  - Reduces water volume by up to 30% when activated UPWARDS
  - PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
  - Antimicrobial Coating on Handle Protects Against Germs
  - Distinctive Green ADA Compliant Metal Non-Hold-Open Handle with Triple Seal Handle Packing signifies Water Conserving Device
  - 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
  - Adjustable Tailpiece
  - 1 ½" Offset Flush Tube
  - Vacuum Breaker with Flush Connection
  - Spud Coupling and Spud Flange for 1½" Top Spud
  - Sweat Solder Adapter with Cover Tube and Cast Wall Flange
  - High Copper, Low Zinc Brass Castings for Dezincification Resistance
  - Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
  - Flush Accuracy Controlled by CID™ Technology
  - Diaphragm, Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
  - Includes two (2) adhesive backed Metal Wall Plates etched with instructions

Bedpan Washer Diverter Assembly with the following features:

- Solid One-piece Body Construction
- Solid Brass Spray Arm
- Counter Balanced Pivot Assembly
- Diverter Valve Wall Support

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037. Installation meets ADA height requirements.

### Variations

- ☐ **YI** Two Wall Bumpers (for open front seat without cover)
- ☐ **YO** Bumper on Angle Stop (for open front seat without cover)
- ☐ **O** 1 ½" Offset Flush Tube Standard-Specify if 2" is Required
- ☐ **SG** SaniGuard® Antimicrobial Handle, Handle Socket and Spray Arm\*

\* SaniGuard does not protect users or others against disease-causing bacteria.

Made In The  
**USA**



This space for Architect/Engineer approval

Job Name _____	Date _____
Model Specified _____	Quantity _____
Variations Specified _____	
Customer/Wholesaler _____	
Contractor _____	
Architect _____	

The information contained in this document is subject to change without notice.

## SLOAN®

SLOAN VALVE COMPANY • 10500 SEYMOUR AVE. • FRANKLIN PARK, IL 60131

Ph: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380

www.sloanvalve.com