



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 1315

ISSUED: 1-87

REVISED: 7-99

UTILITY SHELF WITH MOP HOLDERS, DRYING ROD AND RAG HOOKS

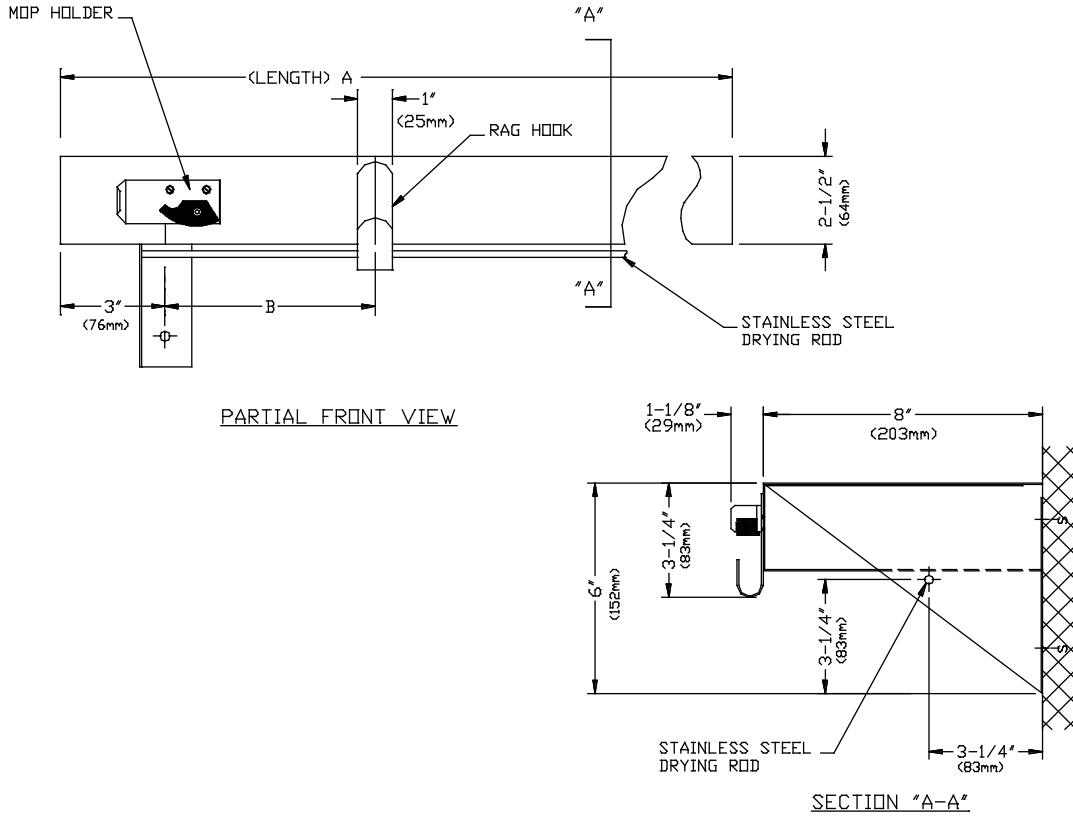

SPECIFICATION

Utility Shelf with Mop Holders, Drying Rod and Rag Hooks shall be fabricated of alloy 18-8 stainless steel, type 304. Utility shelf shall have 2-1/2" wide hemmed-in edge all around and shall be No. 18 gauge and length shall be as per schedule below. Rubber-cam mop-holders shall be provided in quantity listed in schedule at the face of shelf. A 3/8" dia. stainless steel rod shall be provided to run between the mounting bracket gussets. Mounting brackets shall be №16 gauge. All exposed surfaces shall be №4 satin finish and be protected during shipment with a PVC film easily removable after installation.

SCHEDULE				
Model №	A	B	Mop Holder Quantity	Rag Hook Quantity
1315-3	30" (762mm)	6" (152 mm)	3	2
1315-4	36" (914 mm)	5" (127 mm)	4	3
1315-6	48" (1219 mm)	4-3/16" (106 mm)	6	5

Utility Shelf with Mop Holders, Drying Rod and Rag Hooks shall be Model № 1315-____ (insert size code) fabricated by American Specialties, Inc., 441 Saw Mill River Road Yonkers, New York 10701- 4913

INSTALLATION

Unit is surface mounted on wall or partition having clear wall space to floor using №10 self tapping screws (supplied). For compliance with ADA Accessibility Guidelines unit should be installed so that top of shelf is 48" (1219mm) maximum above finished floor (AFF) and 32" (813mm) minimum AFF. Typical installation for general utility is 72" (1879mm) above finished floor to top of shelf.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.