



MODEL No:	8425
ISSUED:	
REVISED:	9-96

SURFACE MOUNTED CLOTHES HOOK

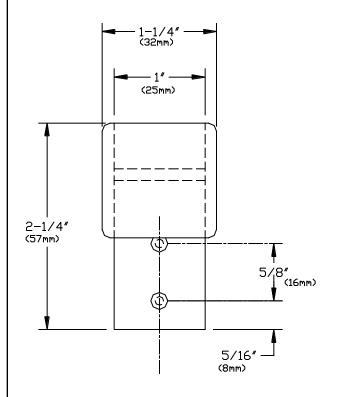

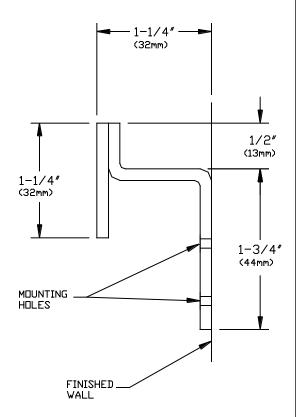

SPECIFICATION

Surface Mounted Clothes Hook shall be fabricated of alloy 18-8 stainless steel, type 304. Hook shall be formed from one piece of N^2 11gauge stainless steel and shall project 1-1/4" (32mm) from mounting surface with a 1/2" (13mm) hook tip. A 1-1/4" (32mm) square stainless steel safety dress plate with radiused corners shall be aligned and welded to hook tip. Two (2) 7/32" (5.6mm) dia. holes shall be provided to accommodate mounting screws. All exposed surfaces shall be N^2 4 satin finish.

Surface Mounted Clothes Hook shall be Model Nº 8425 as fabricated by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701- 4913

INSTALLATION

Unit is surfaced mounted to wall or partition using Nº10 self tapping screws (supplied) through two (2) mounting holes provided. For compliance with ADA Accessibility Guidelines, unit should be installed 54" (1372mm) maximum above finished floor (AFF) if clear floor side reach access is provided or 48" (1219mm) max. AFF if clear floor forward reach access is provided.

Accessory Specialties

AMERICAN DISPENSER

Desert Rau Products

WATROUS INC.