



A WATTS Brand

EXD-2N, EXD-3N Express® Deck Lavatory System – EXD-Series

- ADA and TAS compliant
- Serves one to three users at a time
- Standard Lavatory Spacing on 30" Centers
- Continuous bowl is constructed of Terreon® solid surface material
- Select a Bradley Faucet or faucet by others
- Available in a variety of colors

Specifications

Accommodates one to three users. Units handle washroom traffic quickly and economically, while providing each user with personal space. The Express® Deck System is designed with standard lavatory spacing positioned on 30" centers.

Product Compliance

Listed by IAPMO R&T to

- Uniform Plumbing Code (UPC)
- National Plumbing Code of Canada
- International Plumbing Code (IPC)
- IGC 156 and the requirements of CSA B45.5/ IAPMO Z124 and ASME A112.18.1/CSA B125.1



Listed by UL Environment to

- GreenGuard Gold



Complies with

- ADA
- ICC/ANSI 117.1
- TAS
- NSF/ANSI 372



Sustainability

Terreon participates in the mindful MATERIALS library



Serves the American Disabilities Act and ICC/ANSI 117.1 guidelines, citations 306, 308, 309.4, 606.4, 606.5 when installed according to these requirements.

Consult local codes and standards.

Construction

Bowl

Constructed of Terreon, a densified solid surface material composed of a bio-based resin. Terreon is resistant to chemicals, stains, burns, and impact. Surface damage can be easily repaired with everyday cleansers or fine grit abrasives. Terreon is GREENGUARD® certified as low-emitting materials.

Access Panel

Panel is composed of high impact polymer. Highly resistant to impact, abrasion, and corrosion. The panel will not chip, peel, or flake.

Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

Page 1 of 6



2/19/2024

This information is subject to change without notice.

Bradley_Sink_Express_EXD-2N_3N

[View Latest Version](#)

EXD-2N/WH
(Wall-Hung Frame)
shown with optional
soap dispensers and
optional Aerada™ 900
Series Futura Faucets

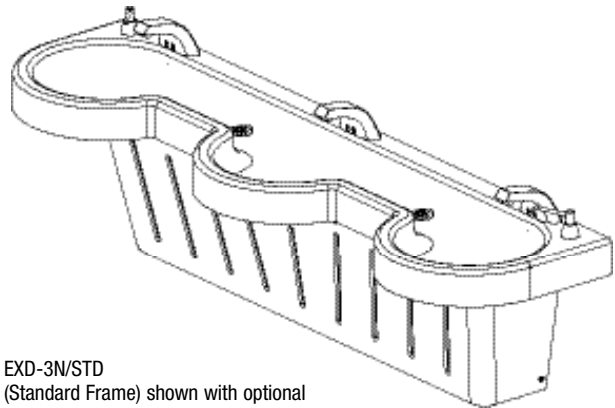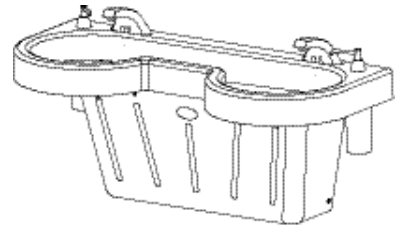

EXD-3N/STD
(Standard Frame) shown with optional
soap dispensers and optional Aerada 900
Series Futura Faucets

Support Frame

Bowl assembly and access panel are secured to a heavy gauge stainless steel support frame mounted to wall.

Vandal Resistance

Water supplies, valving, waste assembly, and other optional items are concealed within the pedestal/frame.

Standard Frame

The standard frame on the Express® EXD-Series includes a scuff base and is designed to comply with all ADA guidelines on reaches, clearances, and operation for adult users.

Wall-Hung Frame

The wall-hung frame on the Express® EXD-Series (less scuff base above) is designed to mount at different heights (adult and children) to comply with guidelines on reaches, clearances, and operation for various codes including, ADA Accessibility Guidelines for Buildings and Facilities (ADAAG) and TAS (Texas Accessibility Standards). Always check your local and state codes.

Standard Equipment

Bowl with two or three lavatories, pedestal, stainless steel mounting frame (as described above), and the following fittings: P-trap; tailpiece.



This plumbing fixture is designed for hand washing only. It is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.

For more information on faucets, valves, transformers, cabinets, and the sensor-operated soap dispenser, please visit bradleycorp.com.

© 2024 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com





A WATTS Brand

EXD-2N, EXD-3N


Express® Deck Lavatory System – EXD-Series

Dimensions


(mm)

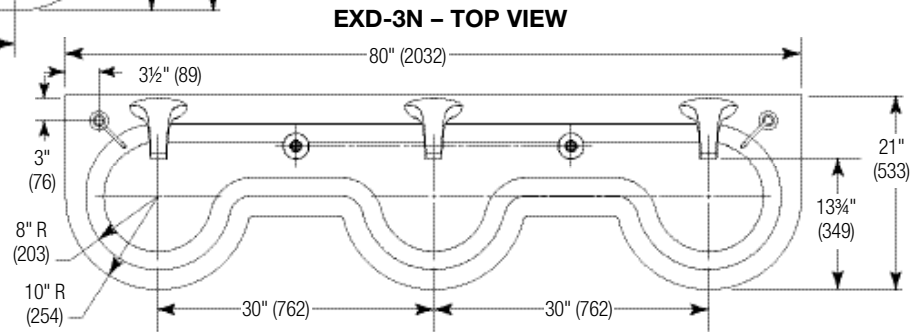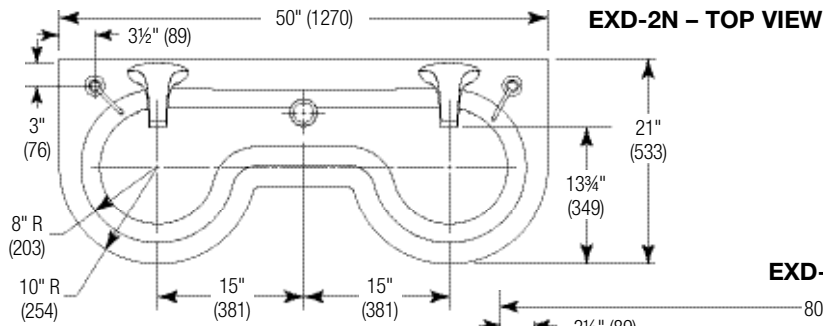


EXD-2N – FRONT VIEW – STANDARD FRAME

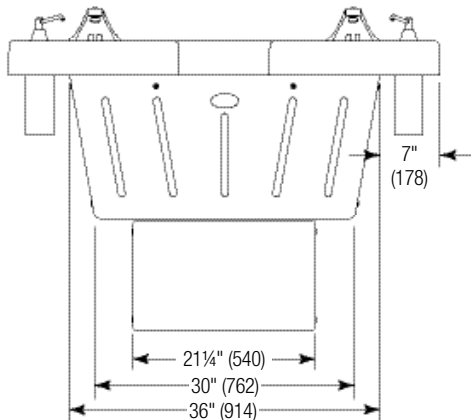


EXD-3N – FRONT VIEW – STANDARD FRAME

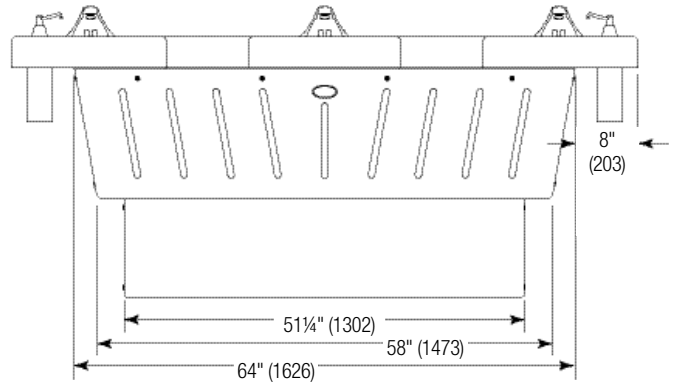

EXD-2N – FRONT VIEW – WALL-HUNG FRAME

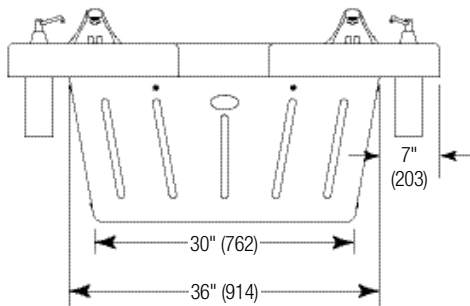

EXD-3N – FRONT VIEW – WALL-HUNG FRAME

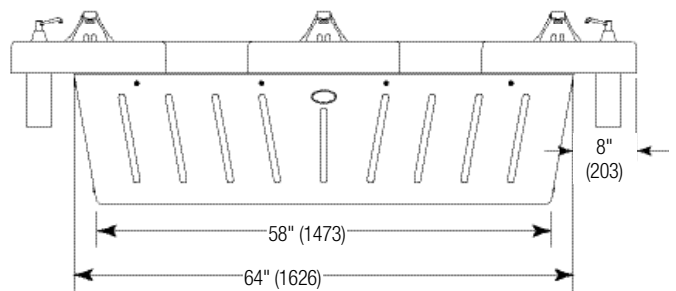

Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

[View Latest Version](#)




A WATTS Brand

EXD-2N, EXD-3N Express® Deck Lavatory System – EXD-Series


Dimensions – Side View

(mm)


Standard Height

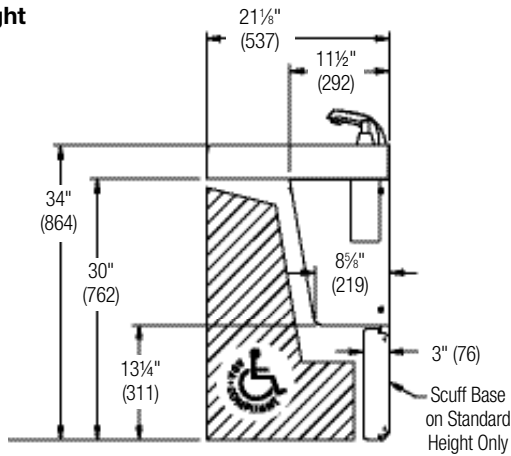


Wall-Hung Mounted at Standard Height

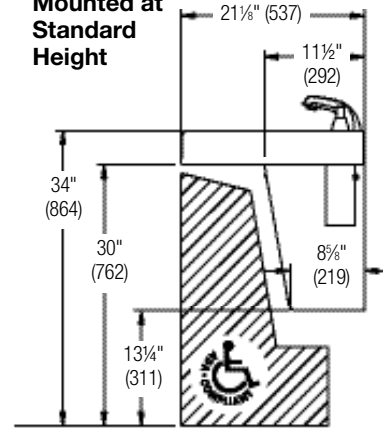


Wall-Hung Mounted at Juvenile Height: Ages 6 through 12

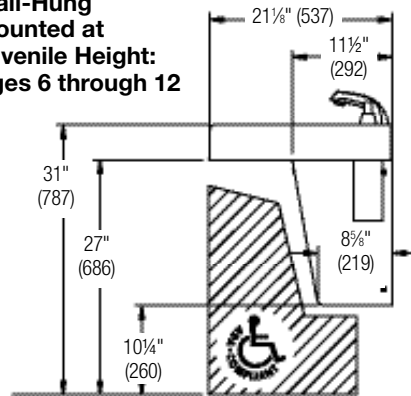

Wall-Hung Mounted at TAS Height: Grades 6 through 8 or 9

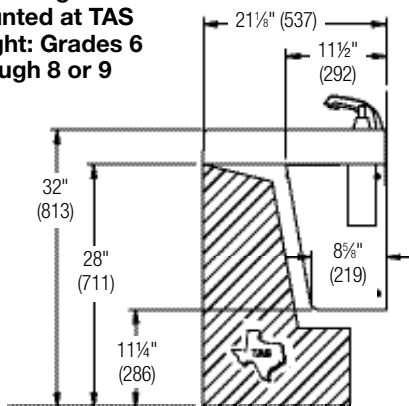

Wall-Hung Mounted at TAS Height: Grades Pre-K through 5 or 6

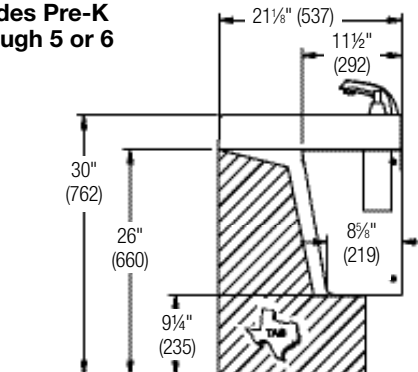

Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

Page 3 of 6 2/19/2024
This information is subject to change without notice.
Bradley_Sink_Express_EXD-2N_3N

[View Latest Version](#)

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com



A WATTS Brand

EXD-2N, EXD-3N

Express® Deck Lavatory System – EXD-Series

Model EXD-2N – Mounting for Standard and Wall-Hung Heights are Shown

(mm)

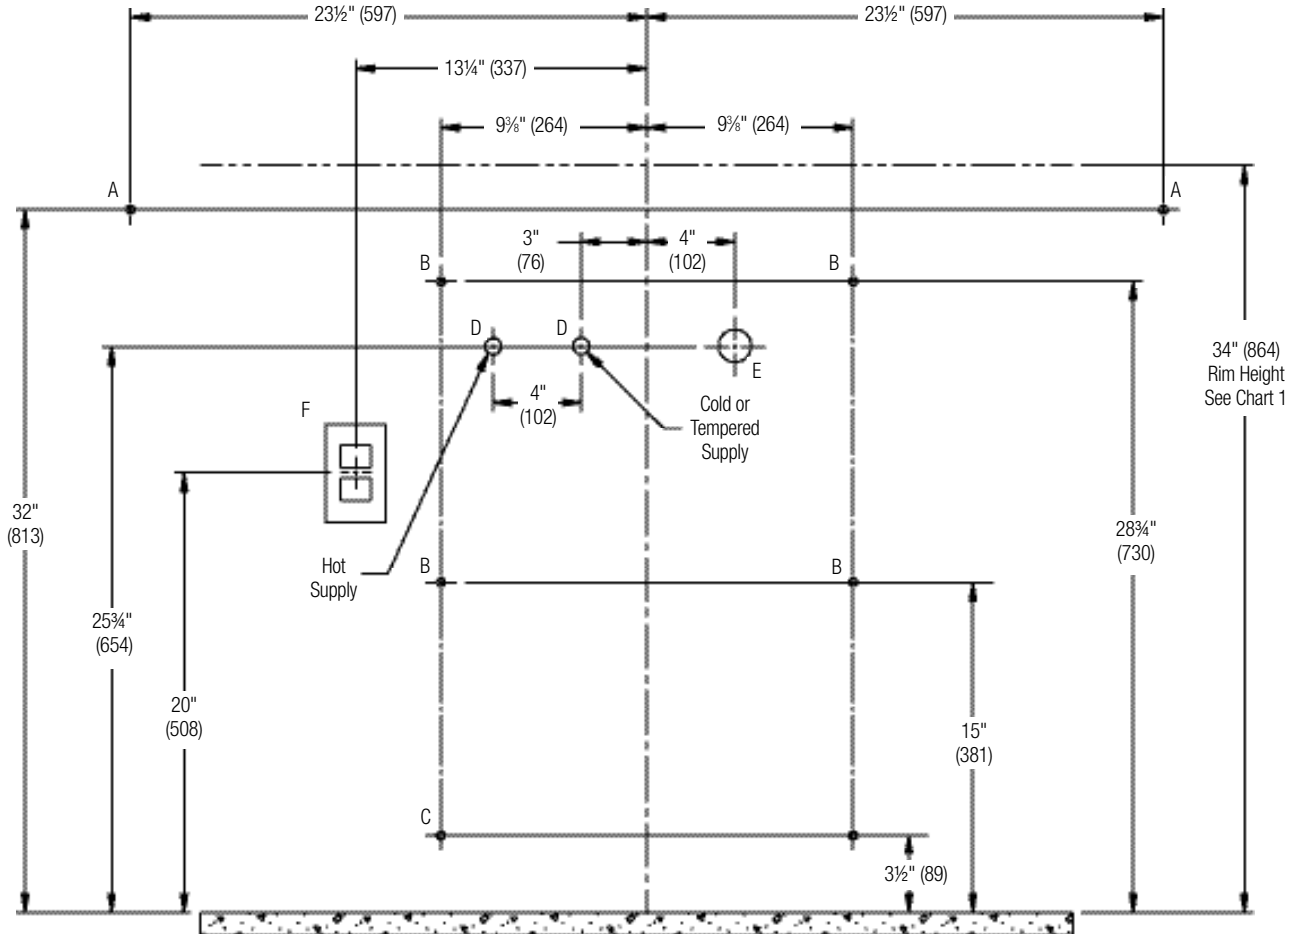


CHART 1

RIM HEIGHT	VERTICAL HEIGHT ADJUSTMENTS A – H	FIXTURE STYLE
34"	None	Standard Height
34"	None	Wall-Hung
32"	Subtract 2"	TAS, Grades 6 through 8 or 9
31"	Subtract 3"	Juvenile Height
30"	Subtract 4"	TAS, Pre-K through 5 or 6

CHART 2

CODE	DESCRIPTION	QTY.
A	3/8" Bowl Wall Anchors with a Min. Pull-Out Force of 1000 lb	2
B	3/8" Main Frame Wall Anchors with a Minimum Pull-Out Force of 1000 lb	4
C	3/8" Base Frame Wall Anchors with a Min. Pull-Out Force of 1000 lb Standard Frame Option Only.	2
D	1/2" Nominal Copper Tubing for Hot/Cold Supplies, Stub-Out 2" from Wall	2
E	1 1/2" NPT Drain, Stub-Out 2" from Wall	1
F	110V GFCI Protected Elec. Outlet	1

Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

Page 4 of 6 2/19/2024
This information is subject to change without notice.
Bradley_Sink_Express_EXD-2N_3N

[View Latest Version](#)

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com



A WATTS Brand

EXD-2N, EXD-3N Express® Deck Lavatory System – EXD-Series

Model EXD-3N – Mounting for Standard and Wall-Hung Heights are Shown

(mm)

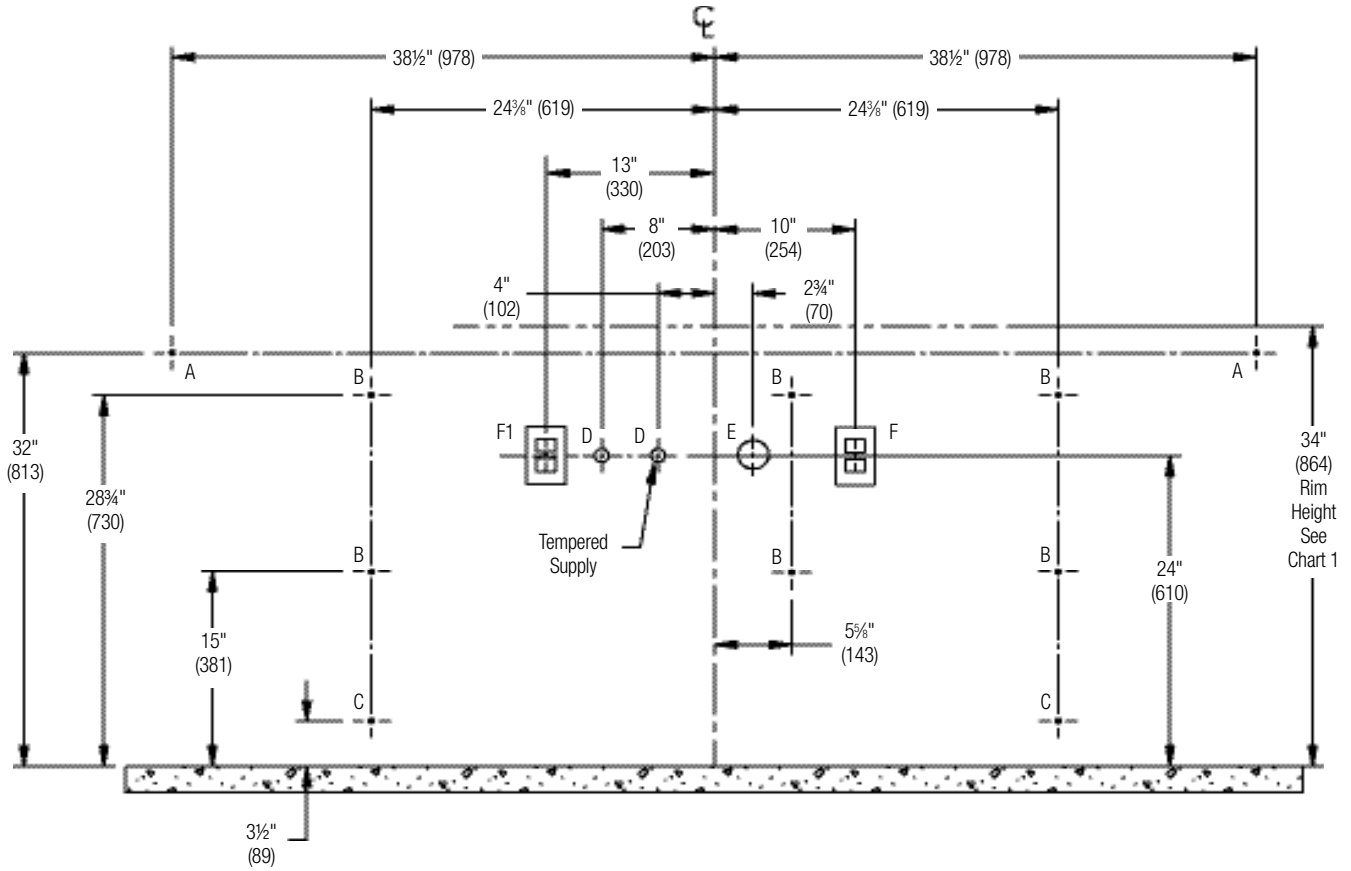


CHART 1

RIM HEIGHT	VERTICAL HEIGHT ADJUSTMENTS A – H	FIXTURE STYLE
34"	None	Standard Height
34"	None	Wall-Hung
32"	Subtract 2"	TAS, Grades 6 through 8 or 9
31"	Subtract 3"	Juvenile Height
30"	Subtract 4"	TAS, Pre-K through 5 or 6

CHART 2

CODE	DESCRIPTION	QTY.
A	3/8" Bowl Wall Anchors with a Min. Pull-Out Force of 1000 lb	2
B	3/8" Main Frame Wall Anchors with a Minimum Pull-Out Force of 1000 lb	6
C	3/8" Base Frame Wall Anchors with a Min. Pull-Out Force of 1000 lb Standard Frame Option Only.	2
D	1/2" Nominal Copper Tubing for Hot/Cold Supplies, Stub-Out 2" from Wall	2
E	1 1/2" NPT Drain, Stub-Out 2" from Wall	1
F	110V GFCI Protected Elec. Outlet	1
F1	110V GFCI Protected Elec. Outlet – OPTIONAL	1

Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

Page 5 of 6 2/19/2024
This information is subject to change without notice.
Bradley_Sink_Express_EXD-2N_3N

[View Latest Version](#)

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com



A WATTS Brand

EXD-2N, EXD-3N

Express® Deck Lavatory System – EXD-Series

Models (Must select one)

- | Model | Description |
|------------------------------|---|
| ☐ EXD-2N | Express Deck Lavatory System, 2-Station |
| ☐ EXD-3N | Express Deck Lavatory System, 3-Station |

Optional Selections

Water Assembly Type:

- | | |
|--------------------------------|-----------------------------|
| ☐ S-CHROME | Single Chrome-Plated P-Trap |
| ☐ S-POLY | Single Polypropylene P-Trap |

† This color contains large, randomly distributed chips.

Standard Selections (Must select one from each category)

Faucet Drilling Type* (select one)

- | | |
|------------------------------|--|
| ☐ 4" SET | 4" Centerset Drilling (1-1/4" Drilling Only) |
| ☐ SHANK | Centershank Drilling (1-1/4" Drilling Only) |
| ☐ 8" SET | 8" Centerset Drilling (1-1/4" Drilling Only) |
| ☐ NFD | No Faucet Drilling |

Pedestal Type (select one)

- | | |
|---------------------------|--|
| ☐ STD | Standard Frame - 34" (With Scuff Base) |
| ☐ WH | Wall-Hung Frame |

Soap Dispenser Type (select one)

- | | | | |
|-------------------------------|---|---------------------------|--------------------|
| ☐ 6324 | 16 oz. Plastic Globe, 4" Spout | ☐ SDO | Soap Drilling Only |
| ☐ 6324-68 | 32 oz. Plastic Globe, 4" Spout | ☐ NSD | No Soap Dispenser |
| ☐ 6315 | Sensor-Operated Soap Dispenser (See below for soap options) | | |

For 6315 Dispenser (must order as separate line items)

- | | |
|--------------------------------|---|
| ☐ P19-232B | 1000-Shot or 27 oz. Lotion Soap with Moisturizer (4 Bottles per Case) |
| ☐ P19-232A | 2000-Shot or 54 oz. Lotion Soap with Moisturizer (4 Bottles per Case) |
| ☐ P19-231F | Plug-In Adapter - 6315 Soap Dispenser |

Water Supply Type (select one)

- | | |
|----------------------------|---|
| ☐ TMA | Navigator® Thermostatic Mixing Assembly (Hot and Cold Supplies - supply hoses and shut-offs included) |
| ☐ TL | Single Tempered Line Assembly (Supply hoses and shut-off included) |
| ☐ NONE | No Valve Option Selected (Supply hoses and shut-off valves by others) |

Color of Terreon® Bowl (select one)

NOTE: Click on any swatch to view as a larger image.

Standard Colors

- | | | | |
|---------------------------------|----------------|--------------------------------|----------------|
| ☐ ALP-WHT | Alpine White | ☐ PEBBLE | Pebble Beach |
| ☐ CHAR | Charcoal Gray | ☐ PEP-WHT | Peppered White |
| ☐ DRIFT | Driftwood † | ☐ POLAR | Polar Ice † |
| ☐ DS-WHT | Designer White | ☐ RIVER | Riverstone |
| ☐ E-GRAY | Empire Gray | ☐ SAND | Sandtrap |
| ☐ GLACIER | Glacier | ☐ S-CREEK | Stone Creek |
| ☐ GRAPH | Graphite | ☐ S-MIST | Silver Mist |
| ☐ LANNON | Lannonstone | ☐ WHT-SAND | White Sand |
| ☐ MOONSTONE | Moonstone † | | |

Access Panel Type (select one)

- | | |
|----------------------------|------|
| ☐ COAL | Coal |
|----------------------------|------|

Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.