



A WATTS Brand

TDB3105

Terreon® 36" Circular, 7-1/2" Deep Bowl Washfountain

Key Features

- cUPC Certified
- ADA and TAS compliant
- Suitable for heavy-duty hand washing
- Air valve metering, infrared activation, or TouchTime® mechanical metering
- Vandal resistant – easy to clean
- Three different heights (including juvenile and intermediate heights)

Specifications

Size and Capacity

Accommodates up to five users at a time. The Classic Sprayhead (non-sectional) is controlled by an infrared sensor, electronic pushbutton or piezo switch, or air activated push button. The operating range is 20-80 psi.

Construction

Bowl Materials

Constructed of Terreon®, a densified solid surface material composed of bio-based resin. Terreon is resistant to chemicals, stains, burns, and impact. Surface damage can be easily repaired with everyday cleansers or fine grit abrasives. Terreon is GREENGUARD® certified as low-emitting materials.

Trap Enclosure/Pedestal

The elliptical, tapered pedestal is fabricated from reinforced, gel-coated fiberglass with a stainless steel trim piece or kick plate to prevent damage. A large access panel is provided for ease of installation and maintenance.

Vandal Resistance

The infrared sensors, push buttons or switches are secured to the unit from inside a heavy gauge stainless steel module to prevent tampering. If a vandal attempts to trigger constant operation by covering the sensor or placing a stationary object in the sensor's detection area, the adaptive infrared sensor will automatically shut off the water flow after 30 seconds. All valves, water supplies, and waste connections are concealed inside the pedestal/trap enclosure. The Terreon is resistant to stains, burns and impact; surface damage is easily repaired and repair work is virtually undetectable.

Standard Equipment

Valves and Fittings

In addition to the bowl and pedestal, the following valves and fittings are standard: sprayhead with stainless steel support tube and bowl gasket, drain and tailpiece with strainer, sprayhead supply tubing, Navigator® thermostatic mixing valve, flexible stainless steel supply hoses, stops, and an adjustable volume control valve.

Activation Controls

Infrared Activation

Hands placed within the bowl are detected by an infrared sensor module which activates a flow of tempered water at a rate of 0.75 gpm (2.8 Lpm) from the classic non-sectional sprayhead. Shut-off is automatic after hands are removed from the detection area. The infrared sensor uses a conical-shaped transmitting beam, having a detection area adapted to, but not exceeding, the bowl perimeter. The infrared sensor automatically adapts to the bowl after power is turned on. The infrared sensor is not affected by varying color tones or darkness. Direct sunlight or bright washroom lights will not activate the system. Infrared models also include solenoid valves and a 12V plug-in adapter as standard equipment:

- Solenoid – 12VDC, 3/8" NPT. Few moving parts, and resistant to most chemicals, minerals, and impurities often present in municipal water supplies.
- Low-Voltage Adapter – A UL/CSA listed 120VAC/12VDC plug-in adapter plugs into a standard GFCI protected electrical outlet. Location of transformer per local electrical code.

Air Valve Metering

Each pushbutton pneumatically actuates a non-hold-open, air metering, single-temperature valve with field adjustable timing from 0–45 seconds. Factory preset at 11 seconds. Each pushbutton activates a flow of tempered water at a rate of 0.15 gpc (0.57 Lpc) from the classic non-sectional sprayhead. Pushbutton requires less than five pounds of pressure.

Page 1 of 5

2/26/2024

[View Latest Version](#)

This information is subject to change without notice.

Bradley_Washfntn_Terreon_TDB3105



TouchTime® Mechanical Metering

Each low-voltage mechanical pushbutton or piezo switch actuates a non-hold-open, slow-closing anti-hammer solenoid valve that is timed from an electronic potted assembly. Each pushbutton activates a flow of tempered water at a rate of 0.15 gpc (0.57 Lpc) from the classic non-sectional sprayhead. TouchTime controls water flow through the use of solid state, digital circuitry. Timing is factory set at 11 second run time but is field adjustable to pre-set timeout periods and optional auto-flush function. The 24 hour flush function will activate water flow for a period of 60 seconds any time there has been no activation within the past 24 hours. Pushbutton and piezo switch requires less than five pounds of pressure. Protected by U.S. patent: D433109

Product Compliance

Listed by IAPMO R&T to

- Uniform Plumbing Code (UPC)
- National Plumbing Code of Canada
- International Plumbing Code (IPC)
- IGC 156 and the requirements of CSA B45.5/IAPMO Z124 and ASME A112.18.1/CSA B125.1



Listed by UL Environment to

- GreenGuard Gold



Sustainability

Terreon participates in the mindful MATERIALS library



Serves the American Disabilities Act and ICC/ANSI 117.1 guidelines, citations 306, 308, 309.4, 606.4, 606.5 when installed according to these requirements. Consult local codes and standards.

Listed by NSF International to

- NSF/ANSI 372



Complies with

- ADA
- ICC/ANSI 117.1
- TAS

(Optional equipment may not comply with all ADA dimensional guidelines)



© 2024 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com



A WATTS Brand

TDB3105

Terreon® 36" Circular, 7-1/2" Deep Bowl Washfountain

Standard Selections (Must select one from each category)	
Drain Type (select one)	
☐ O	Off-line vent with supplies from above
☐ B	Centrally rising vent with supplies from above
☐ A	Off-line vent with supplies from below
☐ H	Centrally rising vent with supplies from below
Mounting Height Type (select one)	
☐ STD	Standard Height 34" Rim
☐ JUV	Juvenile Height 30" Rim
☐ TAS	Intermediate Height 32" Rim
Sprayhead Type (select one)	
☐ CLC	Classic Sprayhead (entire sprayhead activates)
Activation Type (select one)	
☐ IRP	Infrared
☐ AST4	Air Pushbutton
☐ TTPA	TouchTime Pushbutton §
☐ TTPB	TouchTime Piezo Switch §
Water Supply Type (select one)	
☐ TL	Tempered Line
☐ TMA	Thermostatic Mixing Valve
Soap Dispenser Type (select one)	
☐ LSD	Liquid Soap Dispenser *
☐ PSD	Powdered Soap Dispenser *
☐ MLSD	Metal-Clad Liquid Soap Dispenser *
☐ SA	Cube Adapter for Individual Soap Dispensers (dispensers sold separately)
☐ MPSD	Metal-Clad Powdered Soap Dispenser *
☐ NSD	No Soap Dispenser
Color of Terreon Bowl (select one)	
NOTE: Click on any swatch to view as a larger image.	
Standard Colors	
☐ ALP-WHT	☐ Alpine White
☐ CHAR	☐ Charcoal Gray
☐ DRIFT	☐ Driftwood †
☐ DS-WHT	☐ Designer White
☐ E-GRAY	☐ Empire Gray
☐ GLACIER	☐ Glacier
☐ GRAPH	☐ Graphite
☐ LANNON	☐ Lannonstone
☐ MOONSTONE	☐ Moonstone †
☐ PEBBLE	☐ Pebble Beach
☐ PEP-WHT	☐ Peppered White
☐ POLAR	☐ Polar Ice †
☐ RIVER	☐ Riverstone
☐ SAND	☐ Sandtrap
☐ S-CREEK	☐ Stone Creek
☐ S-MIST	☐ Silver Mist
☐ WHT-SAND	☐ White Sand

Optional Selections	
Shroud Type	
☐ SH	Stainless Steel Shroud (Conceals overhead plumbing)
☐ NONE	No Shroud
<i>NOTE: Floor to ceiling height is required; maximum height of 13 ft. 0 in. A height greater than the maximum height will be considered a special order.</i>	
Support Tube Reinforcement Type	
☐ TA	1-1/2" Tie Pipe Assembly (not required when SH is selected)
☐ NONE	No Tie Pipe Assembly
Towel Dispenser Type	
☐ CFTD	(3) C-Fold, Multi-Fold Dispenser *
☐ NONE	No Towel Dispenser

* Optional equipment may not comply with all ADA guidelines

† This color contains large, randomly distributed chips.

§ TTPA and TTPB valves require a low-voltage UL/CSA listed 120VAC/12VDC plug-in adapter.




A WATTS Brand


TDB3105

Terreon® 36" Circular, 7-1/2" Deep Bowl Washfountain


Dimensions - Standard Height

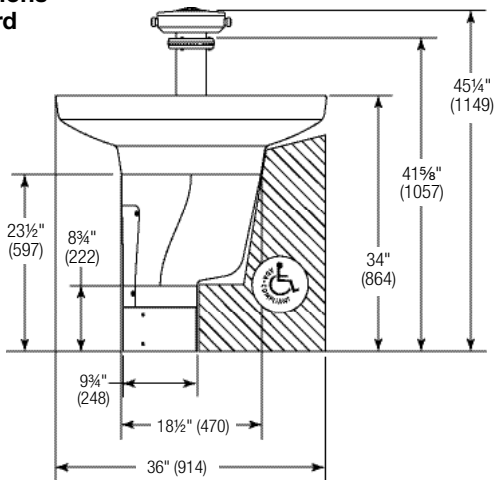


Standard Height with Optional Accessories

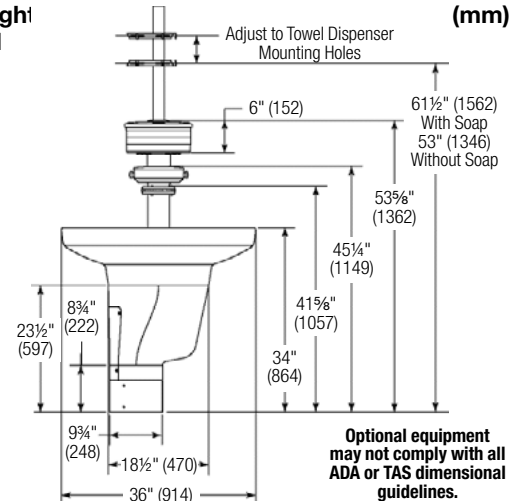


Dimensions - TAS Height

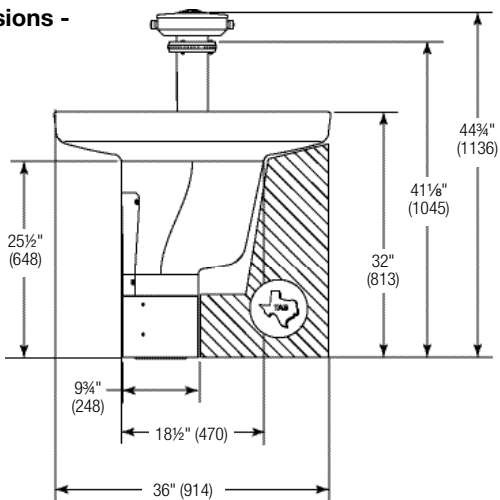


TAS Height with Optional Accessories

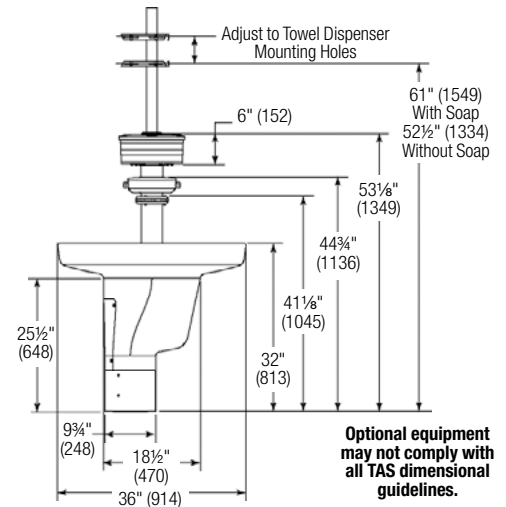

Dimensions - Juvenile Height

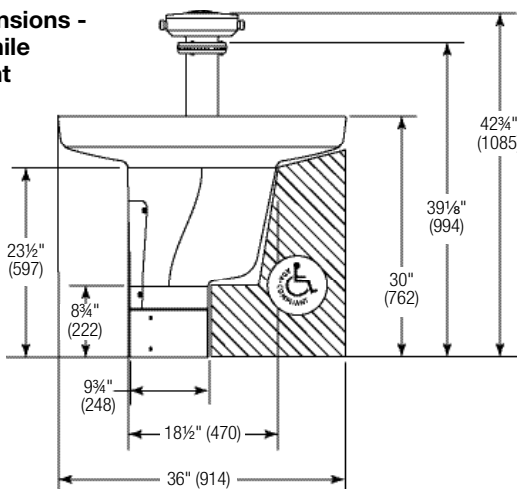

Juvenile Height with Optional Accessories

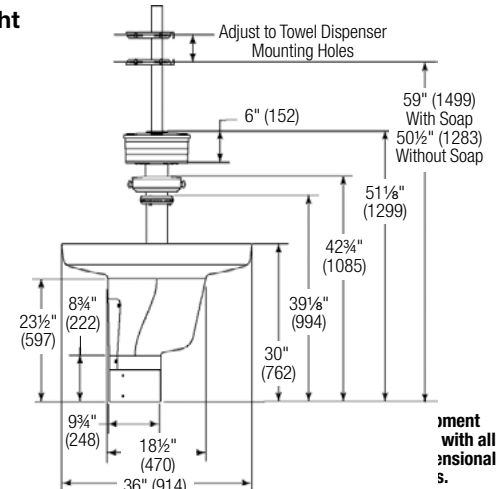



A WATTS Brand



TDB3105 Terreon® 36" Circular, 7-1/2" Deep Bowl Washfountain

(mm)

Rough-Ins



Type A -

Off-line vent with supplies from below.

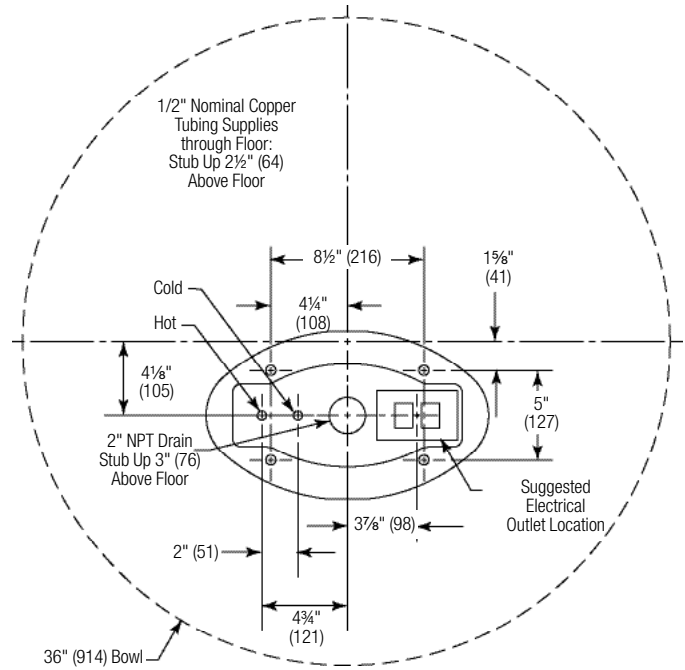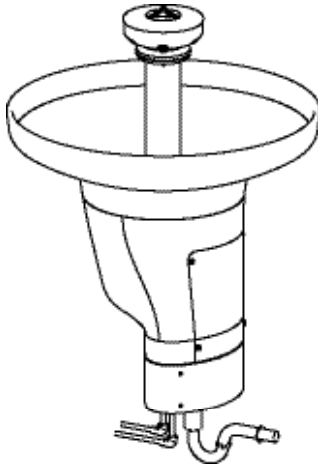

Type B -

Centrally rising vent with supplies from above.

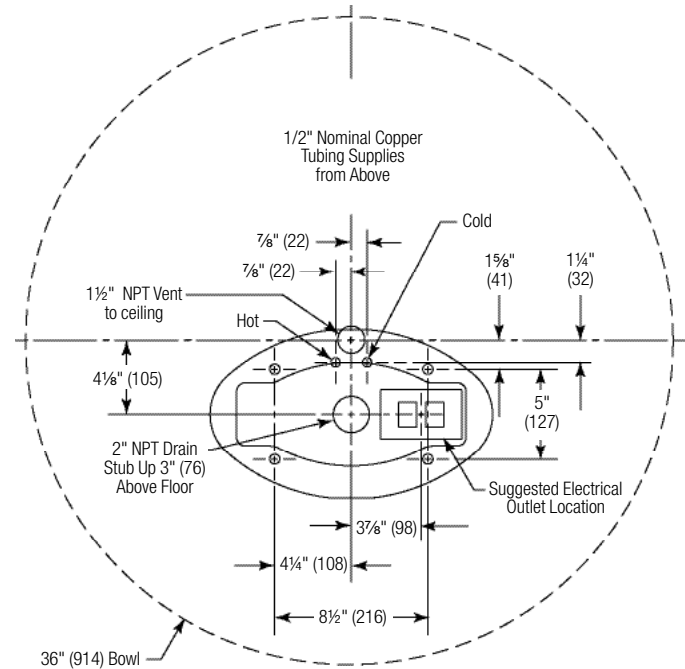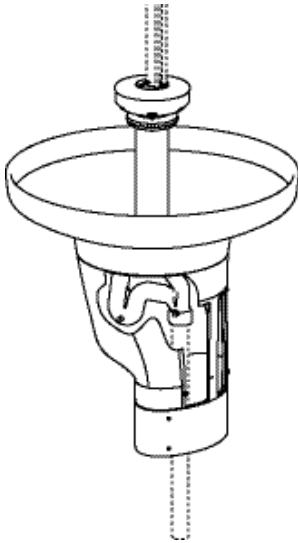



A WATTS Brand



TDB3105 Terreon® 36" Circular, 7-1/2" Deep Bowl Washfountain

(mm)

Rough-Ins

Type H -

Centrally rising vent with supplies from below.

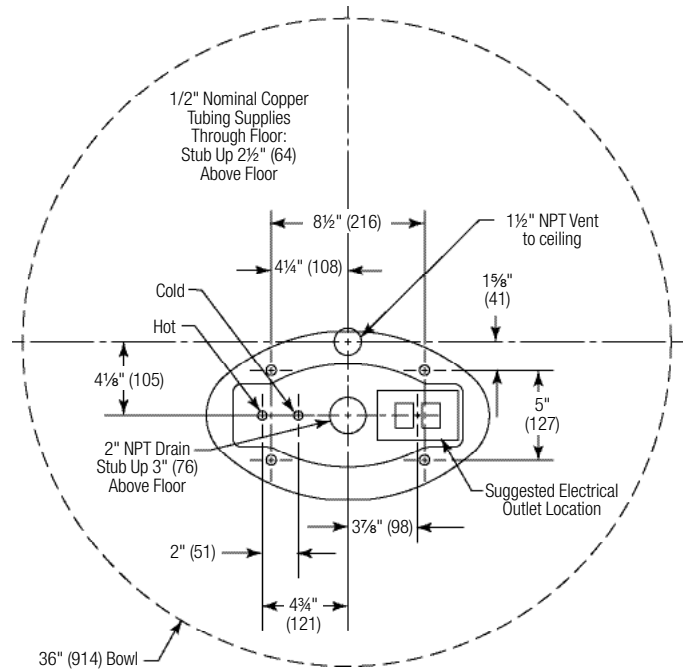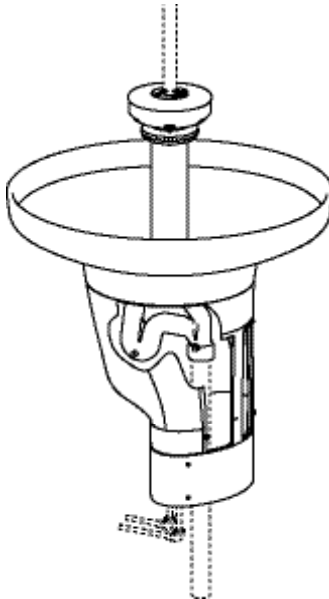

Type O -

Off-line vent with supplies from above.

