



A WATTS Brand

WF2503, WF2504, WF2505, WF2508 Terreon® Classic Washfountains

- Pre-assembled bowl and pedestal
- Available in 54" or 36" diameter semi-circular or circular bowls
- 9" deep bowl, designed for heavy-duty hand washing
- Reliable foot, air, infrared activation, or TouchTime® mechanical metering

Specifications

Size and Capacity

Semi-circular models accommodate up to 3 users (36" models) or 4 users (54" models) at a time. Circular models accommodate up to 5 users (36" models) or 8 users (54" models) at a time. The classic sprayhead (non-sectional) is controlled by a foot rail, air activated pushbutton, an infrared sensor, or an electronic pushbutton or piezo switch. The washfountain bowls, pedestals, and valve sets are completely assembled. Only the support column and connections to the valve set and drain require assembly. The operating range is 20-80 psi. Flow rate controlled by volume control valve.

Construction

Terreon® Bowl Materials

Constructed of Terreon®, a densified solid surface material composed of bio-based resin. Terreon® is resistant to chemicals, stains, burns, and impact. Surface damage can be easily repaired with everyday cleansers or fine grit abrasives. Terreon is GREENGUARD® certified as low-emitting materials.

Pedestals

Constructed of die-formed legs, upper braces, scuff bases, and panels: legs are zinc chromate plated 14 gauge steel; upper braces are 16 gauge galvanized steel; and scuff bases and pedestals are 300 series stainless steel with a #4 finish.

Standard Equipment

Valves and Fittings

In addition to the bowl and pedestal assembly, the following valves and fittings are standard: sprayhead with stainless steel support tube and bowl gasket; spud with domed strainer; sprayhead supply line; manual mixing valve; volume control valve; and (2) stop, strainer, and check valves.

Activation Controls

Foot

Each press of the foot rail mechanically actuates a hold-open valve with slow closing upon release of foot pressure. Foot rail activates a flow of tempered water at a rate of 0.50 gpm (1.9 Lpm) for WF2503; 1.0 gpm (3.8 Lpm) for WF2504; 0.75 gpm (2.8 Lpm) for WF2505; or 1.0 gpm (3.8 Lpm) for WF2508 from the classic non-sectional sprayhead.

Air

Each pushbutton pneumatically actuates a non-hold-open, air metering, single-temperature valve with field adjustable timing from 0–45 seconds. Factory preset at 11 seconds. Each pushbutton activates a flow of tempered water from the classic non-sectional sprayhead. Pushbutton requires less than five pounds of pressure.

Infrared

Hands placed within the bowl are detected by an infrared sensor module which activates a flow of tempered water at a rate of 0.75 gpm (2.8 Lpm) for WF2503; 1.25 gpm (4.7 Lpm) for WF2504; 0.75 gpm (2.8 Lpm) for WF2505; or 1.0 gpm (3.8 Lpm) for WF2508 from the classic non-sectional sprayhead. Shut-off is automatic after hands are removed from the detection area. The infrared sensor uses a conical-shaped transmitting beam, having a detection area adapted to, but not exceeding, the bowl perimeter. The adaptive infrared sensor automatically adapts to the bowl after power is turned on. The infrared sensor is not affected by varying color tones or darkness. Direct sunlight or bright washroom lights will not activate the system. Infrared models also include solenoid valves and a 12V plug-in adapter as standard equipment.



WF2504

- Solenoid – 12VDC, 3/4" NPT. Few moving parts, and resistant to most chemicals, minerals, and impurities often present in municipal water supplies.
- Low-Voltage UL/CSA listed 120VAC/12VDC plug-in adapter. Plugs into a standard GFCI protected electrical outlet. Location of transformer per local electrical code.

TouchTime® Mechanical Metering

Each low-voltage mechanical pushbutton or piezo switch actuates a non-hold-open, slow-closing anti-hammer solenoid valve that is timed from an electronic potted assembly. Each pushbutton activates a flow of tempered water at a rate of 0.15 gpc (0.57 Lpc) for WF2503; 0.25 gpc (0.95 Lpc) for WF2504; 0.15 gpc (0.57 Lpc) for WF2505; or 0.25 gpc (0.95 Lpc) for WF2508 from the classic non-sectional sprayhead. TouchTime controls water flow at all stations through the use of solid state, digital circuitry. Timing is factory set at 11 second run time but is field adjustable to pre-set timeout periods and optional auto-flush function. The 24 hour flush function will activate water flow for a period of 60 seconds any time there has been no activation within the past 24 hours. Pushbutton and piezo switch requires less than five pounds of pressure.

Product Compliance

Listed by IAPMO R&T to

- Uniform Plumbing Code (UPC)
- National Plumbing Code of Canada
- International Plumbing Code (IPC)
- IGC 156 and the requirements of CSA B45.5/IAPMO Z124 and ASME A112.18.1/CSA B125.1



Listed by NSF International to

- NSF/ANSI 372



Listed by UL Environment to

- GreenGuard Gold





A WATTS Brand

WF2503, WF2504, WF2505, WF2508

Terreon® Classic Washfountains

Models (Must select one)

Model	Size	Users	Material
☐ WF2503	36" Semi-Circular	3	Terreon
☐ WF2504	54" Semi-Circular	4	Terreon
☐ WF2505	36" Circular	5	Terreon
☐ WF2508	54" Circular	8	Terreon

Standard Selections (Must select one from each category)

Drain Type (select one)

- ☐ **A** Off-line vent with supplies from below
☐ **B** Centrally rising vent with supplies from above
☐ **H** Centrally rising vent with supplies from below
☐ **O** Off-line vent with supplies from above

Mounting Height Type (select one)

- ☐ **STD** Standard Height ☐ **JUV** Juvenile Height

Sprayhead Type (select one)

- ☐ **CLC** Classic Sprayhead (entire sprayhead activates)

Activation Type (select one)

- ☐ **F** Foot ☐ **TTPA** TouchTime Pushbutton**
☐ **IRP** Infrared ☐ **TTPB** TouchTime Piezo Switch**
☐ **AST4** Air Pushbutton

Water Supply Type (select one)

- ☐ **MMV** Manual Mixing Valve‡ ☐ **TMA** Thermostatic Mixing Valve

Soap Dispenser Type (select one)

- ☐ **PSD** Powdered Soap Dispenser ☐ **MPSD** Metal-Clad Powdered Soap Disp.
☐ **LSD** Liquid Soap Dispenser ☐ **SA** Cube Adapter for Individual Soap Dispensers (dispensers sold separately)
☐ **MLSD** Metal-Clad Liquid Soap Dispenser ☐ **NSD** No Soap Dispenser

Terreon® Bowl Color (select one)

- ☐ **SS-GRAY** Soapstone Gray ☐ **CA-TAN** Canyon Tan

Optional Selections

Shroud Type

- ☐ **SH** Stainless Steel Shroud (Conceals Overhead Piping)
☐ **NONE** No Shroud Type

NOTE: Floor to ceiling height is required; maximum height of 13 ft. 0 in. A height greater than the maximum height will be considered a special order.

Support Tube Reinforcement Type

- ☐ **TA** 1-1/2" Tie Pipe Assembly (not required when SH is selected) §
☐ **NONE** No Tie Pipe Assembly

Paper Towel Dispensers

- ☐ **CFTD** (2 for semi, 3 for circular) C-Fold, Multi-Fold Dispenser
☐ **NONE** No Towel Dispenser

Hose Bibb Type

- ☐ **HB** Hose Bibb*
☐ **NONE** No Hose Bibb


* Available with STD height only.

** TTPA and TTPB require a low-voltage UL/CSA listed 120VAC/12VDC plug-in adapter.


§ Required with drain A, drain O, and towel dispensers.

‡ Not a temperature limiting device. Installer must provide an ASSE 1070 device where required per code.


Semi-Circular Terreon® WF2503 and WF2504, Circular Terreon® WF2505 and WF2508

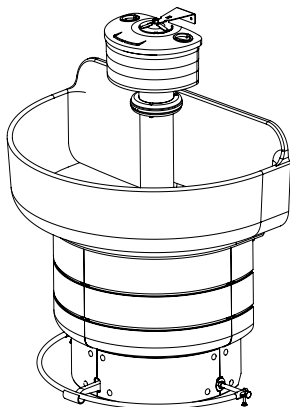


WF2503

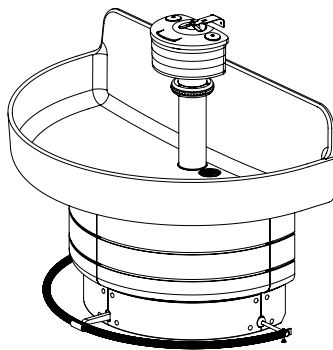

WF2504

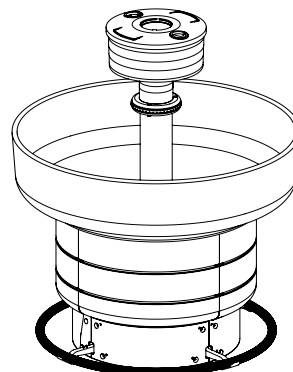

WF2505

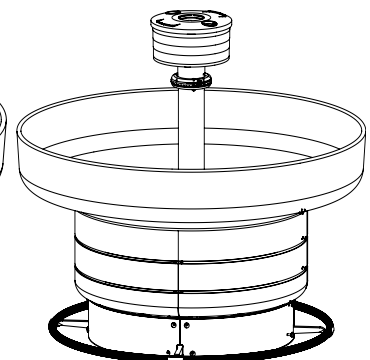

WF2508




A WATTS Brand

WF2503, WF2504, WF2505, WF2508


Terreon® Classic Washfountains

Dimensional Information

(mm)



Add 3½" to Dimensions D & E for Optional TouchTime®, Infrared Sensor or Air Valve

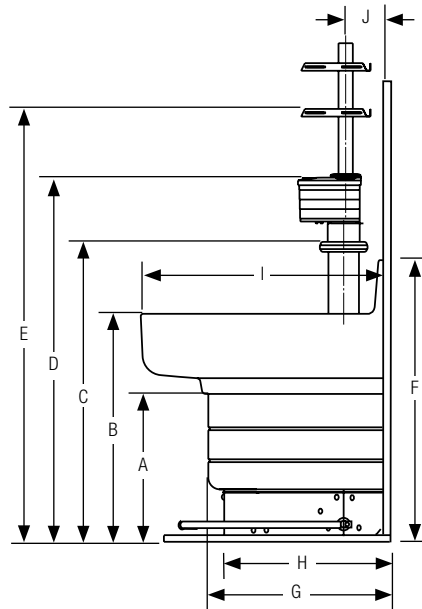


Semi-Circular


Model	Size	A*	B*	C*	D**	E**	F	G	H	I	J
2504	54 (1372)	19 (483)	29½ (749)	38¾ (984)	47¼ (1200)	55¾ (1416)	36½ (927)	23½ (597)	21¼ (540)	32¼ (819)	5¼ (133)
2503	36 (914)	19 (483)	29½ (749)	35¼ (895)	43¼ (1099)	52¼ (1327)	33¾ (848)	17¼ (438)	15¼ (387)	22¾ (578)	4¾ (121)

* Juvenile Height: Subtract 4" (102) from dimensions A through E for juvenile height.

** Add 3-1/2" (89) for optional TouchTime®, infrared sensor or air valve.



Add 3½" to Dimensions D & E for Optional TouchTime®, Infrared Sensor or Air Valve

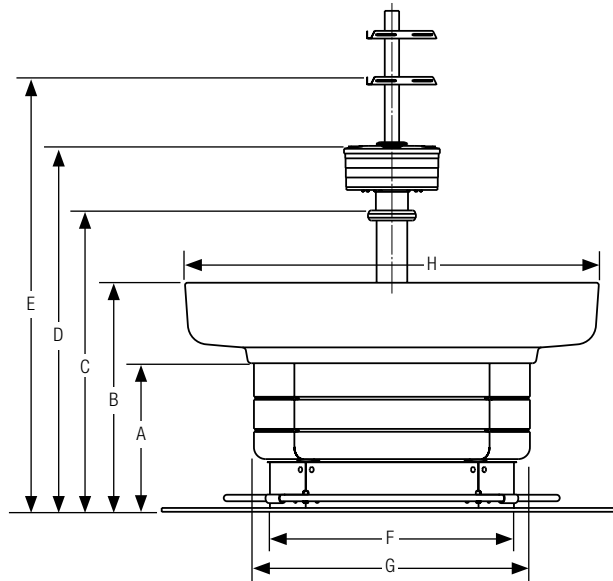

Circular

Model	Size	A*	B*	C*	D**	E**	F*	G	H
2508	54 (1372)	19 (483)	29½ (749)	38¾ (984)	47¼ (1200)	55¾ (1416)	32 (813)	36 (914)	54 (1372)
2505	36 (914)	19 (483)	29½ (749)	35¼ (895)	43¼ (1099)	52¼ (1327)	21 (533)	25 (635)	36 (914)

* Juvenile Height: Subtract 4" (102) from dimensions A through E for juvenile height.

** Add 3-1/2" (89) for optional TouchTime®, infrared sensor or air valve.




Terreon® Classic Washfountains


(mm)

1. All pipes and fittings not furnished by Bradley are shown in broken lines.
2. Supply lines for one to two washfountains should be 1"; for three washfountains 1-1/4"; for more than three washfountains, pipe sizes should be increased proportionately.
3. Overhead supplies must be reduced to 1/2" copper tube to pass through support tube.
4. Check valve inlets are 1/2" NPT.
5. Drain Types B and H: For maximum rigidity of sprayhead/support tube assembly, use 1-1/2" NPT galvanized pipe for vent. Use of plastic or copper for vent is not recommended.

- Off-line vent with supplies from below.

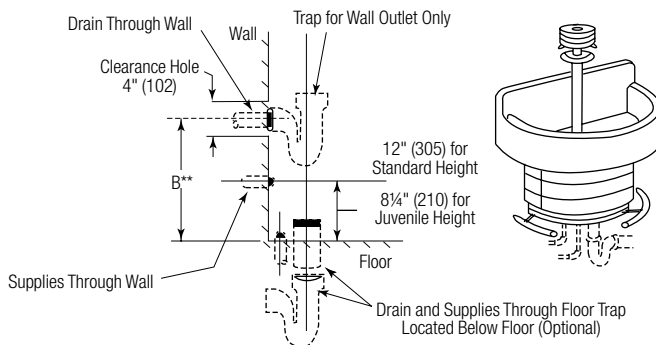

- Off-line vent with supplies from above.

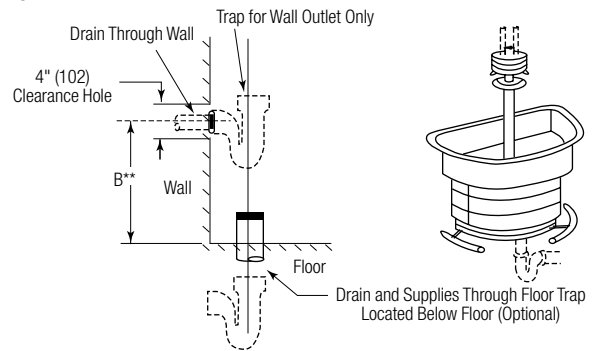

When installing trap with a coupling and nipple, see dimension D in the chart below. If trap is installed tight to bottom of bowl, dimension D depends on design of trap.

Model	Bowl Size	A*	B** (Standard Height)	B** (Juvenile Height)
2504	54" (1372)	5¼" (133)	6 to 13¼" (152 to 337)	6 to 10¼" (152 to 260)
2503	36" (914)	4¾" (121)	6 to 13¼" (152 to 337)	6 to 10¼" (152 to 260)

* Wall to centerline of trap
** Centerline of drain to floor



A WATTS Brand

WF2503, WF2504, WF2505, WF2508

Terreon® Classic Washfountains


Rough-Ins – Semi-Circular (continued)

(mm)


Type B

– Centrally rising vent with supplies from above.

Top View

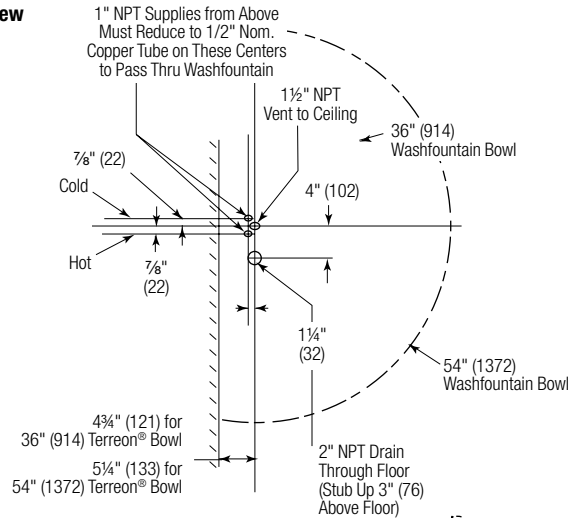


Side View

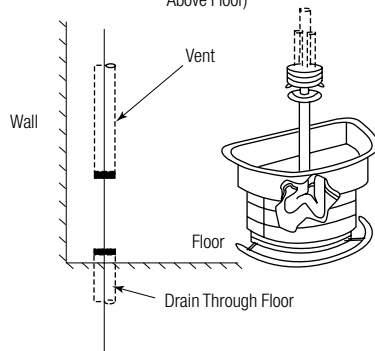


Type H

– Centrally rising vent with supplies from below.

Top View

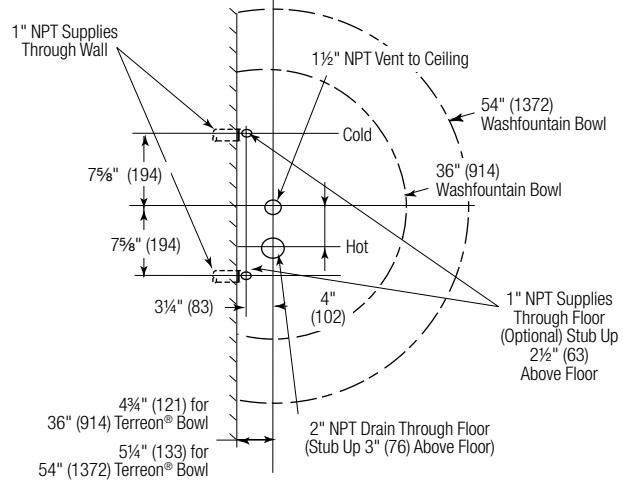

Side View

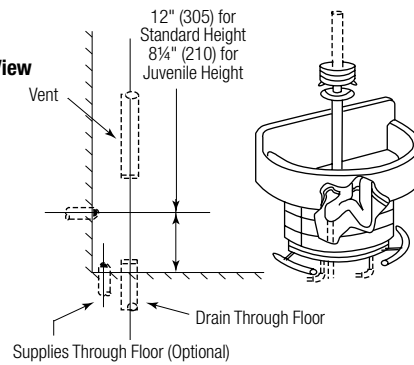


Dimensions – Pedestal Anchoring

(mm)

Model	Bowl Size	Standard Height			Juvenile Height		
		A	B	C	A	B	C
2504	54" (1372)	16 1/2" (419)	14" (356)	18 1/4" (464)	16 1/2" (419)	14" (356)	14 1/4" (362)
2503	36" (914)	11" (279)	8 5/8" (219)	18 1/4" (464)	11" (279)	8 5/8" (219)	14 1/4" (362)

Anchoring Pedestals

1. Place pedestal assembly as shown.
2. Anchor pedestal assembly to floor and wall with suitable wall fasteners. Backing may be required in some types of wall construction.

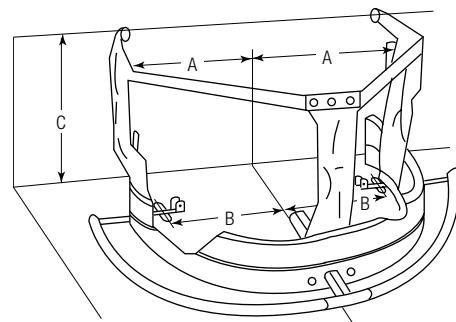



A WATTS Brand


WF2503, WF2504, WF2505, WF2508

Terreon® Classic Washfountains


Rough-Ins – Semi-Circular (continued)

(mm)

Types A and O

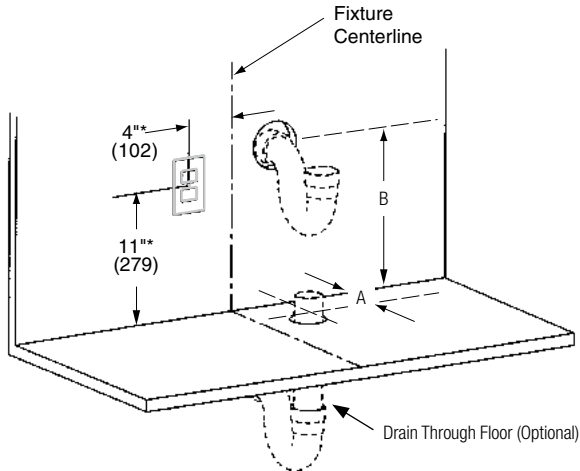

Types B and H

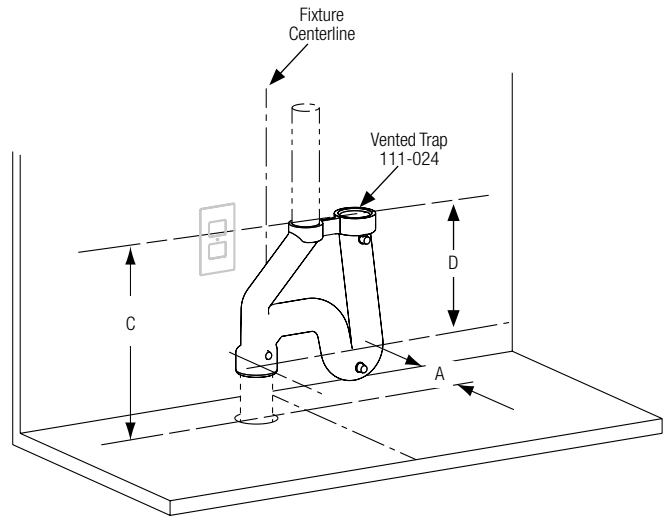

* Suggested location of 120VAC GFCI electrical outlet. Always check local codes before installing. Outlet may be required to be in a remote location.

A (All Types)	B (Types B & H)	C (Types A & O)		D (Types B & H)	
		Standard Height	Juvenile Height	Standard Height	Juvenile Height
4¾" (121)	7" (178)	6 to 13¼" (152 to 337)	6 to 10¼" (152 to 260)	18¾" (473)	14¾" (371)



A WATTS Brand

WF2503, WF2504, WF2505, WF2508


Terreon® Classic Washfountains

Rough-Ins – Circular

(mm)


Type A

– Off-line vent with supplies from below.

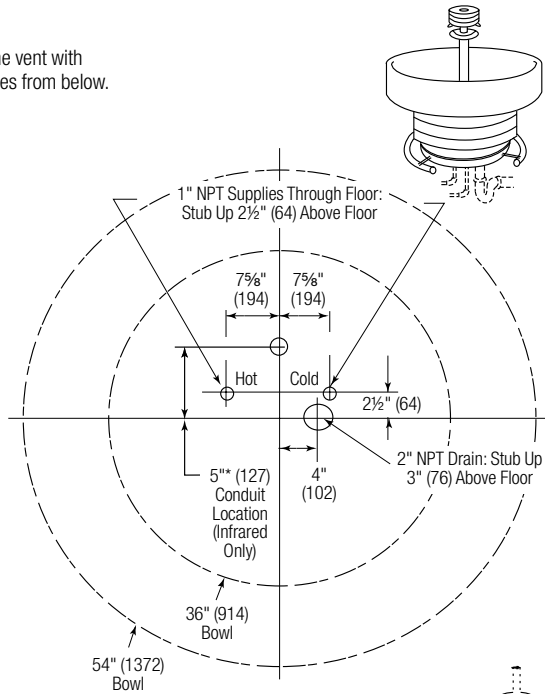


Type B

– Centrally rising vent with supplies from above.

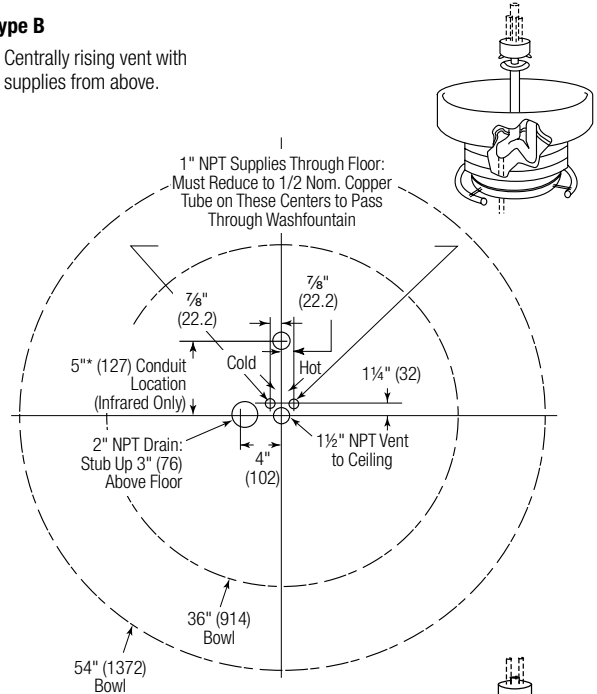


Type H

– Centrally rising vent with supplies from below.

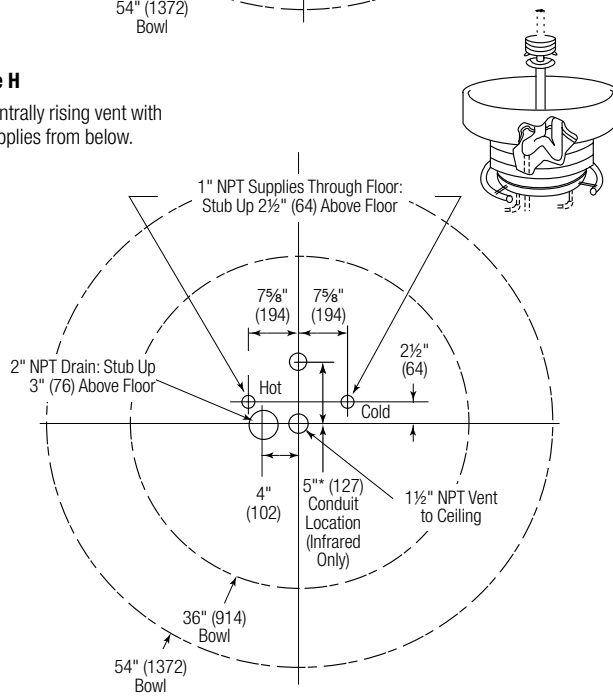

Type O

– Off-line vent with supplies from above.

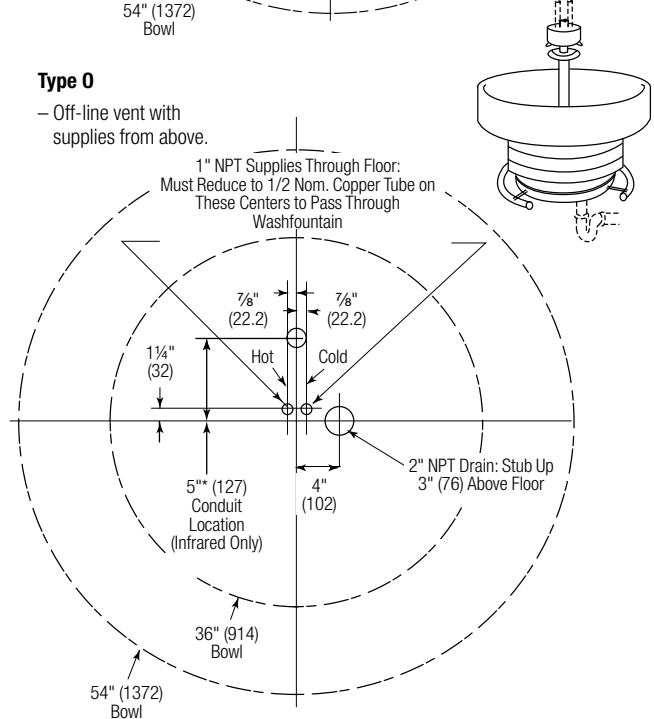

* Remote mounting of plug-in adapter with 120 VAC electrical supply to washfountain is recommended.
See local electrical codes before roughing in. (This conduit location is only a recommendation.)