



A WATTS Brand

SS-1N Express® Lavatory System – SS-Series

Key Features

- ADA, ANSI, TAS, and UFAS compliant
- Constructed of vandal-resistant Terreon® solid surface material
- Available in a variety of colors
- Choose from a Terreon sprayhead or a “bowl only” model with your choice of faucet
- Optional deck-mounted soap dispensers
- Mount with optional surface bracket by Bradley or in-wall carriers by others

Specifications

Wall-hung single-station fixture designed specifically for high traffic commercial hand washing applications. The pre-assembled sprayhead module is equipped with an independent streamformer that is served by an infrared sensing module and solenoid valve (Model SS-1N/IRP), an independent battery infrared sensor and battery (Model SS-1N/BIR3), TouchTime® mechanical push button (Model SS-1N/TPA), or TouchTime piezo switch (SS-1N/TPPB). Operating range is 20–80 psi.

Construction

Bowl and Sprayhead

Constructed of Terreon, a densified solid surface material composed of a bio-based resin. Terreon is resistant to chemicals, stains, burns, and impact. Surface damage can be easily repaired with everyday cleansers or fine grit abrasives. Terreon is GREENGUARD® certified as low-emitting materials.

High Impact Polymer Access Panel

The optional high impact polymer access panel offers a softer look with neutral coal color. This unique design curves to the inside of the front apron to maximize vandal resistance and conceal all plumbing. This access panel features a full perimeter integral flange, pre-drilled with 6 mounting locations to help seal against wall imperfections. This material is highly resistant to impact, abrasion and corrosion. This option is not compatible with a sensor-operated soap dispenser.

Stainless Steel Access Panel

The optional stainless steel access panel is constructed of 18 gauge Type 304 stainless steel with a #4 finish and is mounted with (4) ¼”-20 fasteners (supplied by others) into (4) wall anchors (supplied by others). The stainless steel access panel is compatible with a sensor-operated soap dispenser.

Vandal Resistance

The molded sprayhead is bolted securely to the lavatory bowl. The Terreon bowls are resistant to chemicals, stains, burns, and impact. Damage is repairable. The chrome plated brass streamformer and activation mechanism are secured to the unit from inside the sprayhead module. The infrared sensor will automatically shut off water flow after 30–45 seconds if a vandal attempts to trigger constant operation. TouchTime activation is factory set at 11 seconds run time. Optional access panel conceals valves, connections, and other optional items below the deck.

Mounting

The SS-1N can be supported by a surface-mounted bracket supplied by Bradley or in-wall carriers supplied by others. The surface-mounted bracket is constructed of 1” square structural tubing and is zinc-plated mild steel. The surface-mounted bracket also includes a locking device and leveling screws.



U.S. Patent Pending

Product Compliance

Listed by IAPMO R&T to

- Uniform Plumbing Code (UPC)
- National Plumbing Code of Canada
- International Plumbing Code (IPC)
- IGC 156 and the requirements of CSA B45.5/IAPMO Z124 and ASME A112.18.1/CSA B125.1



Listed by NSF International to

- NSF/ANSI 372



Complies with

- ADA
- ICC/ANSI 117.1
- TAS



Listed by UL Environment to

- GreenGuard Gold



Sustainability

Terreon participates in the mindful MATERIALS library



Serves the American Disabilities Act and ICC/ANSI 117.1 guidelines, citations 306, 308, 309.4, 606.4, 606.5 when installed according to these requirements. Consult local codes and standards.



This plumbing fixture is designed for hand washing only. It is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.

© 2025 Bradley



A WATTS Brand

SS-1N

Express® Lavatory System – SS-Series

Standard Equipment

Models SS-1N/IRP, SS-1N/TTPA and SS-1N/TPPB include bowl, a 120VAC/12VDC plug-in adapter, flexible stainless steel supply connection, P-trap, grid strainer, and tailpiece. Battery included in SS-1N/BIR3 only. The SS-1N (bowl only) includes P-trap, grid strainer, and tailpiece.

Optional Equipment

The SS-1N is available less solid surface sprayhead as a bowl-only unit drilled for 4" and 8" centerset or centershank faucet options. Equip with your choice of Bradley faucets or a faucet by others. The various SS-1N models can be equipped with a deck-mounted soap dispenser. Optional access panels and optional surface-mounted brackets are also available.

Sensor-Operated Soap Dispenser

The optional sensor-operated soap dispenser (6315) is available on all SS-1N units. The soap dispenser features reliable infrared metering activation and LED indicators for Low Battery / Low Soap Refill (soap not included). The dispenser is powered by (4) "D"-cell batteries (not included). 27-oz. (1000-shot) and 54-oz. (2000-shot) soap bottles are available from Bradley for use with the sensor operated soap dispenser. Sensor operated soap dispenser (6315) is compatible with the stainless steel access panel only.

Activation Types

Infrared (Model SS-1N/IRP)

The streamformer is controlled by a slow-closing solenoid valve. Hands placed within the bowl are detected by an infrared sensor module, which activates a flow of tempered water to the streamformer at a rate of 0.50 gpm (1.9 Lpm). Shutoff is automatic after hands are removed from the detection area. The infrared sensor uses a conical shaped transmitting beam, having a detection area adapted to, but not exceeding, the bowl perimeter. The detection area projects forward 15° to each side and 15° below horizontal. The infrared sensor automatically adapts to the bowl after power is turned on. The infrared sensor is not affected by varying color tones or darkness. Direct sunlight or bright washroom lights will not activate the system. Includes solenoid valve and a low voltage plug-in adapter as standard equipment:

- Solenoid - 12VDC, 3/8" NPT. Few moving parts, and resistant to most chemicals, minerals, and impurities often present in municipal water supplies.
- Low Voltage Plug-In Adapter - UL/CSA listed, 120VAC/12VDC plug-in adapter. Plugs into a standard GFCI-protected electrical outlet.

TouchTime (Model SS-1N/TTPA and Model SS-1N/TPPB)

The low voltage mechanical pushbutton or piezo switch activates a non-hold-open, slow closing anti-hammer solenoid valve that is timed from an electronic potted assembly. The pushbutton activates one valve, which, in turn, activates tempered water flow at a rate of 0.10 gpc (0.38 Lpc). TouchTime controls water flow through the use of solid state, digital circuitry. Timing is factory set at a 11 second run time, but is field adjustable to pre-set timeout periods and optional auto-flush function. The 24 hours flush function will activate flow for a period of 60 seconds any time there has been no activation within the past 24 hours. Pushbutton requires less than five pounds of pressure.

Battery Infrared (Model SS-1N/BIR3)

The battery-powered sensor uses a zone-focused infrared transmitting beam, creating a large detection area not exceeding the bowl perimeter. The sensor is not affected by varying skin tones or darkness. When hands enter the detection area, the sensor starts water flow by opening the valve electronically. Tempered water flows at a rate of 0.50 gpm (1.9 Lpm). When hands leave the detection area, the sensor stops the flow of water by closing the electronically activated solenoid valve. The 6-volt DC, electronically activated solenoid valve has few moving parts providing reliable operation which is unaffected by most chemicals and minerals often present in municipal water supplies. The station is powered by a single lithium battery. Battery type is Duracell® DL 223A 6-volt lithium or equivalent (batteries included) with a life expectancy of 4–5 years or approximately 200,000 cycles.

Flow Control Rate

Operating range 20–80 psi. Flow restrictor keeps flow rate constant at all pressures.

For more information on faucets, valves, transformers, cabinets, and soap dispensers, visit bradleycorp.com.




A WATTS Brand

SS-1N Express® Lavatory System – SS-Series


Dimensions

(mm)

Top View

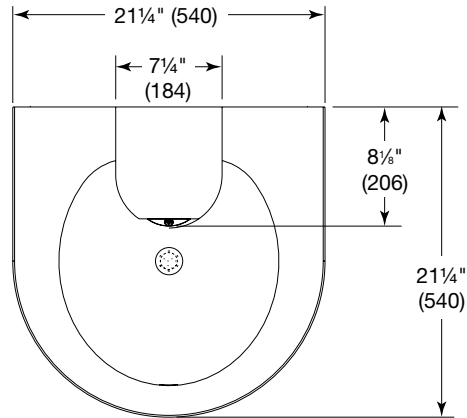


Front View

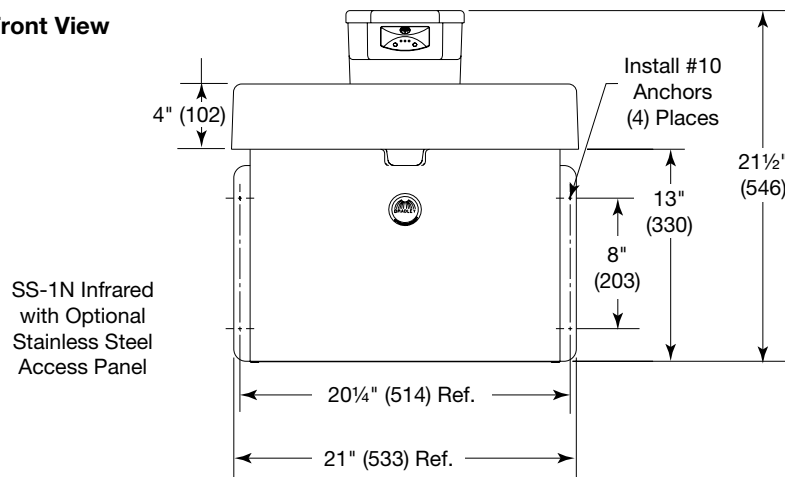

SS-1N Infrared
with Optional
Stainless Steel
Access Panel


Front View

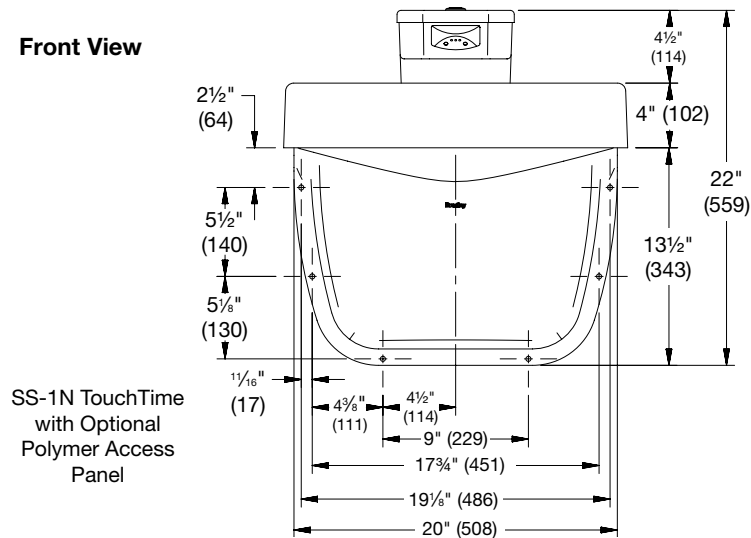


SS-1N TouchTime
with Optional
Polymer Access
Panel



(mm)

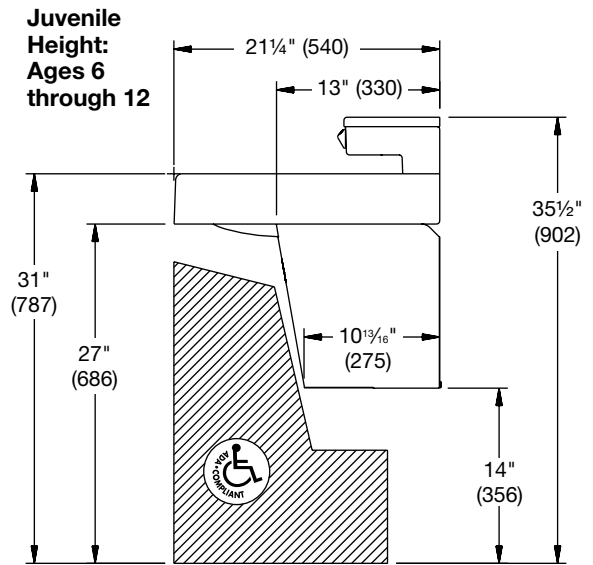

(mm)

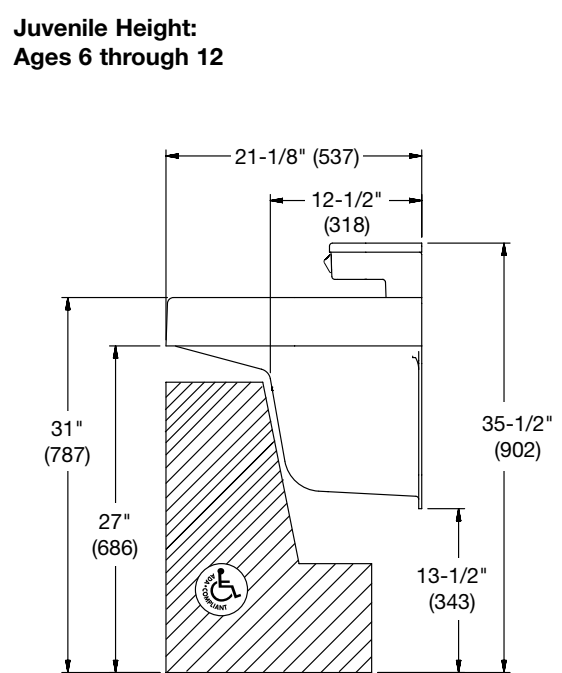



A WATTS Brand

SS-1N Express® Lavatory System – SS-Series

SS-1N – Rough-in

(mm)

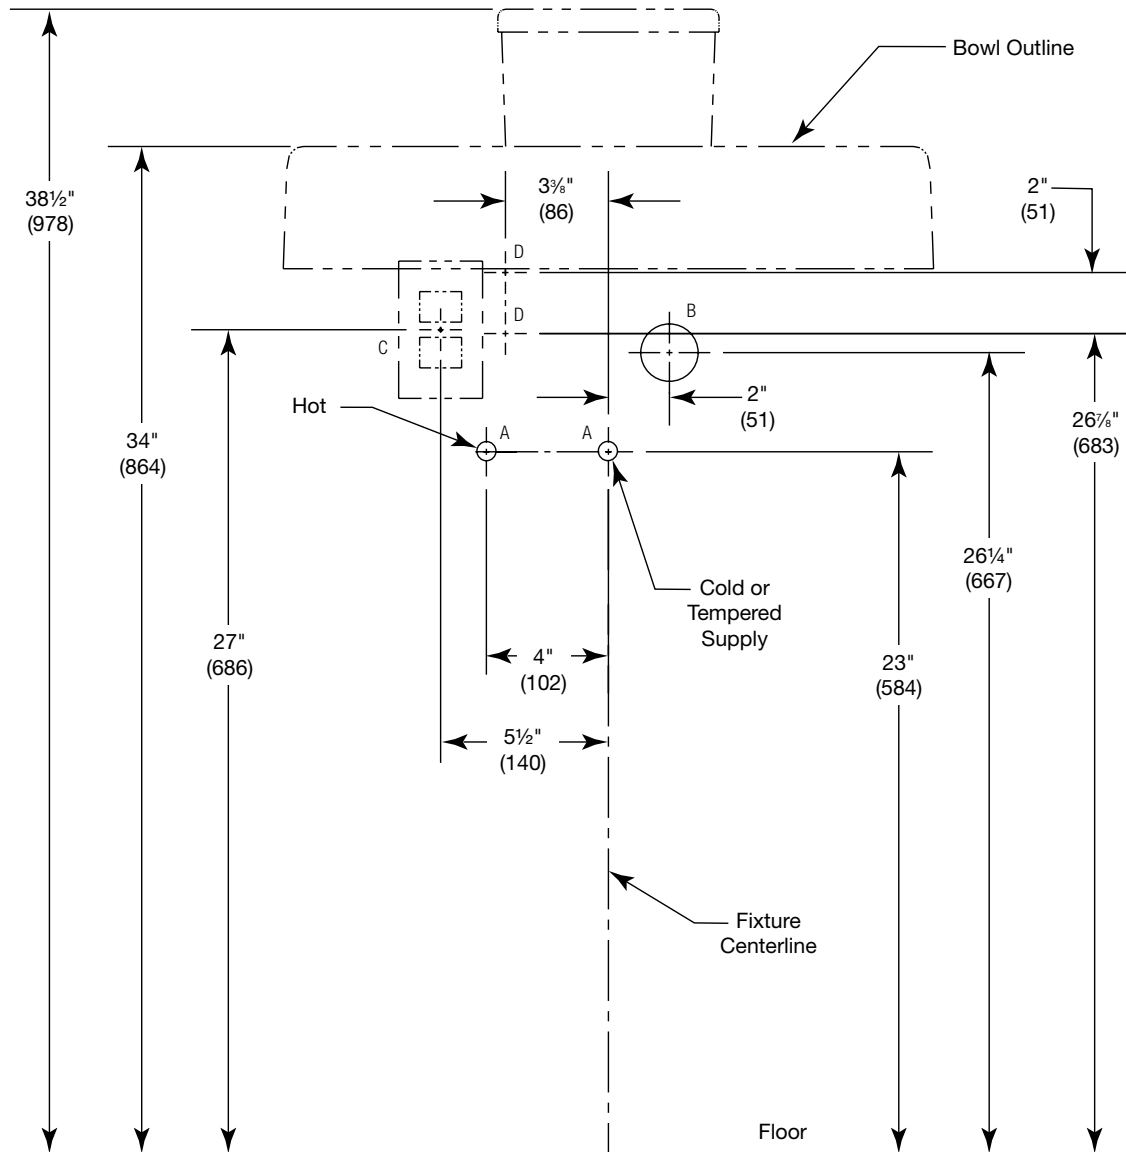


Chart 1

Rim Height	Vertical Height Adjustments A – E	Fixture Style
34"	None	Standard Height
34"	None	Wall-Hung
32"	Subtract 2"	TAS, Grades 6 through 8 or 9
31"	Subtract 3"	Juvenile Height
30"	Subtract 4"	TAS, Pre-K through Grades 5 or 6

Chart 2

Code	Description	Qty.
A	½" Nominal Copper Tubing for Hot and Cold Supplies, Stub-Out 2" from Wall	2
B	1½" NPT Drain, Stub-Out 2" from Wall	1
C	110V GFCI Protected Electrical Outlet. I.R. and TouchTime Only	1
D	#10 Fasteners/Wall Anchors, Optional	2



A WATTS Brand

SS-1N Express® Lavatory System – SS-Series

Standard Selections (Must select one from each category)

Activation Type

IRP	Infrared
BIR3	Battery Infrared
TTPA	TouchTime Push Button
TTPB	TouchTime Piezo Switch
4" SET	4" Centerset Drilling (1-1/4" Drilling Only)
8" SET	8" Centerset Drilling Only (1-1/4" Drilling Only)
SHANK	Centershank Drilling Only (1-1/4" Drilling Only)
NFD	No Faucet Drilling

Soap Dispenser Type (select one)

6322	16-oz Plastic Globe, 2½" Spout
6322-68	32-oz Plastic Globe, 2½" Spout
6315	Sensor-Operated Soap Dispenser (see below for soap options)
SDO	None-Soap Drilling Only - Dispenser By Others
NSD	None-No Soap Dispenser

For 6315 Dispenser must order as separate line items

P19-232B	1000-Shot or 27-oz Lotion Soap with Moisturizer (Case of 4 Bottles)
P19-232A	2000-Shot or 54-oz Lotion Soap with Moisturizer (Case of 4 Bottles)
P19-231F	Plug-In Adapter – 6315 Soap Dispenser














Water Supply Type (select one)

TMA	Navigator® Thermostatic Mixing Assembly (Hot and Cold Supplies)
TL	Single Tempered Line
NONE	No Valve Option Selected - Supply Hoses and Shut-Offs by Others***

Color of Terreon Bowl/Sprayhead Cover (select one)

NOTE: Click on any swatch to view as a larger image.

Standard Colors

CHAR	 Charcoal Gray	PEBBLE	 Pebble Beach *
DRIFT	 Driftwood †*	PEP-WHT	 Peppered White
E-GRAY	 Empire Gray	RIVER	 Riverstone
GRAPH	 Graphite	SAND	 Sandtrap
LANNON	 Lannonstone	S-CREEK	 Stone Creek
MOONSTONE	 Moonstone †	S-MIST	 Silver Mist
		WHT-SAND	 White Sand *

Optional Selections

Access Panel Type (select one)

COAL	Coal High Impact Polymer Access Panel †**
STEEL	Stainless Steel Access Panel

Mounting Type

BRKT	Surface-Mounted Bracket (Instead of carrier by others)
NONE	No Bracket

Waste Assembly Type

S-CHROME	Single Chrome-Plated P-Trap
S-POLY	Single Polypropylene P-Trap

† This color contains large, randomly distributed chips.

‡ Not compatible with a sensor-operated soap dispenser.

* Not available in IRP activation selections.

** Only available with BRKT mounting option.

***Available with 4" SET, 8" SET, SHANK and NFD options only.