


Date:

Project Name:

WR-15F with 4" (102mm) skirt for semi-recessing
WR-15FS with 7-3/4" (197mm) skirt for surface-mounting

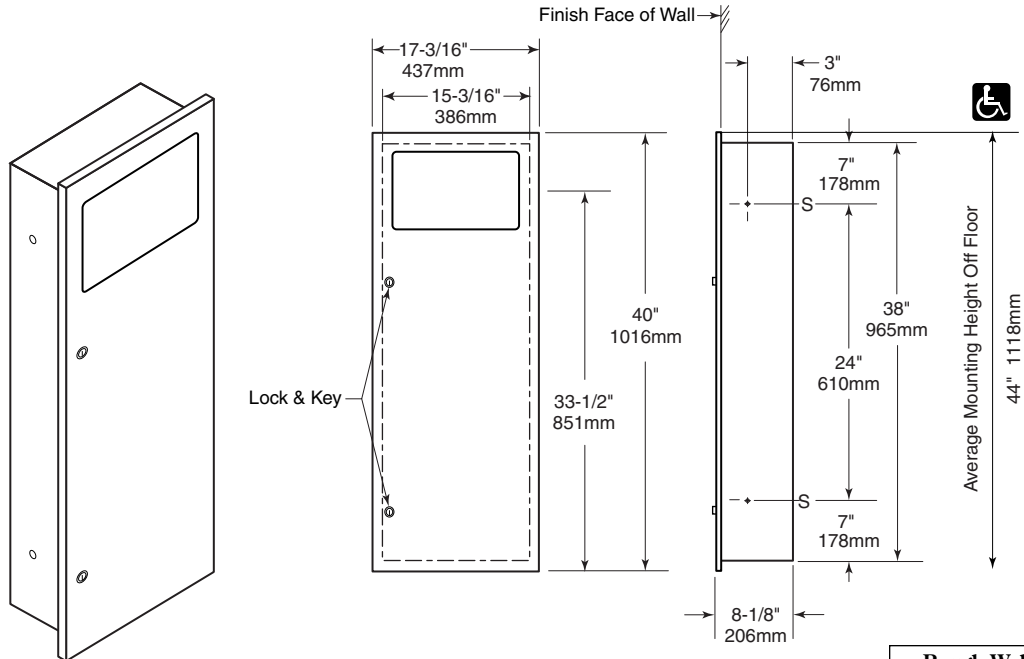

Rough Wall Opening	
15-5/8" (397mm)	wide
38-1/2" (978mm)	high
7-3/4" (197mm)	minimum recessed depth

CONSTRUCTION:

Fabricated type 304 stainless steel with exposed surfaces having a #4 satin-finish. One piece seamless door construction, EXTRA HEAVY 18-gauge (1.2mm) with 5/8" (16mm) return for rigidity. All welded construction. Door is mounted to cabinet with continuous stainless steel piano hinge and fitted with two tumbler locks. Stainless steel container capacity is 12-gallons (45.4L).

INSTALLATION:

Provide framed wall opening. Recessed depth required from finish face of wall is 7-3/4" (197mm). Check plans and coordinate with mechanical engineer to avoid protrusion from opposite wall, pipes, conduits, electrical wiring, etc. If installing in plaster wall, recommend grounding. If installing where unit projects above top of wainscot, provide filler to prevent gap from finished wall and flange of unit. If installing in block walls, use metal expansion shields.

ADA GUIDE:

Hinged panels covering waste receptacle openings should not require more than 5 pounds of force to open. Units should not project more than 4" (102mm) from the wall.

Recessed Coverall Waste Receptacle shall be Model _____ (insert model number) of GAMCO Commercial Restroom Accessories, A Division of Bobrick, One Gamco Place, Durant, OK