



Haws®

model 7603BL

120V Insulated Portable Blanket for Model 7603

FEATURES & BENEFITS

TEMPERED WATER

Heated, insulated blanket provides ANSI compliant tempered potable water in operating temperatures down to -20° F (-30° C). Unit will stay tempered in non-extreme outdoor conditions (below 100° F (38° C)). Installed over the Haws model 7603.

OPTIONS

- 240V Insulated Blanket for Model 7603: Model 7603BL240 NEMA 4 heated, insulated blanket for model 7603 will provide ANSI compliant tempered potable water in operating temperatures down to -20° F (-30° C).
- 240V Insulated Blanket for Model 7603 (HazLoc): Model 7603BL240H NEMA 4 heated, insulated blanket for model 7603 will provide ANSI compliant tempered potable water in operating temperatures down to -20° F (-30° C). Rated for hazardous locations.
- 120V Insulated Blanket for Model 7603 (HazLoc): Model 7603BLH NEMA 4 heated, insulated blanket for model 7603 will provide ANSI compliant tempered potable water in operating temperatures down to -20° F (-30° C). Rated for hazardous locations.

For more information, visit www.hawscos.com or call (888) 640-4297.





SPECIFICATIONS


Model 7603BL NEMA 3R heated, insulated blanket provides ANSI compliant tempered potable water in operating temperatures down to -20°F (-30° C). The self-contained blanket easily installs on to existing model 7603. Eyewash and heating blanket offered as a package or individually. 120VAC, 60 Hz, 1.38A electrical requirement with supplied 8' GFCI power cord. Voltage and Haz Loc options available. CSA certified for NEMA/Type 3R in ordinary locations, and to ANSI/ISEA Z358.1

APPLICATIONS



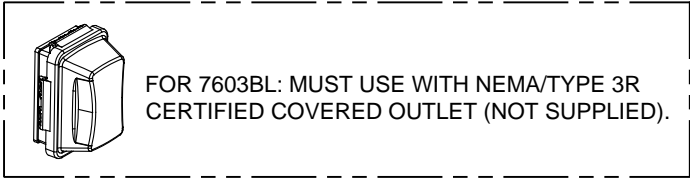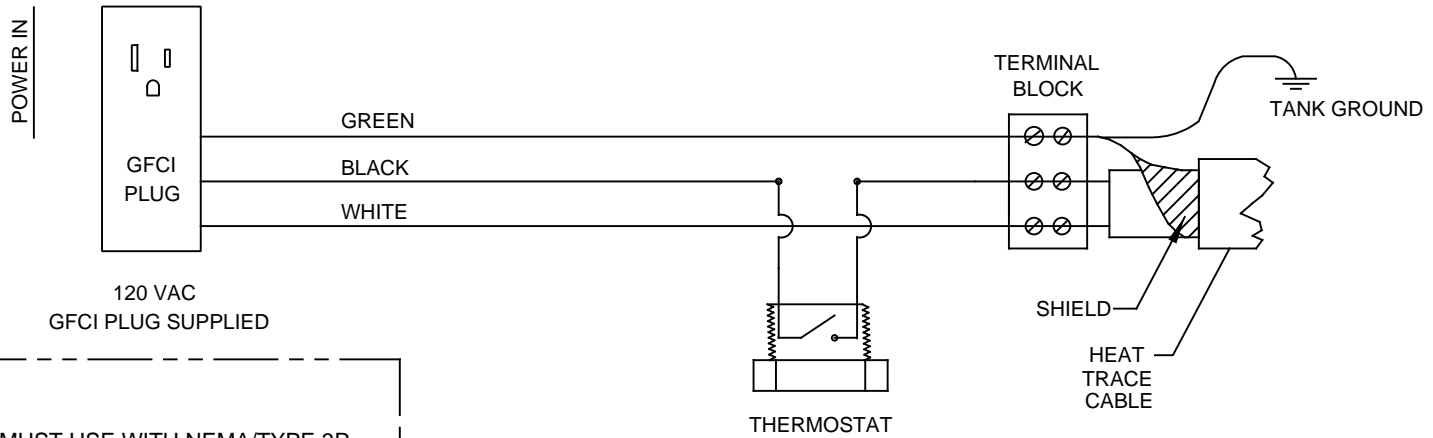


**MODEL 7603BL
ELECTRICAL DETAIL**

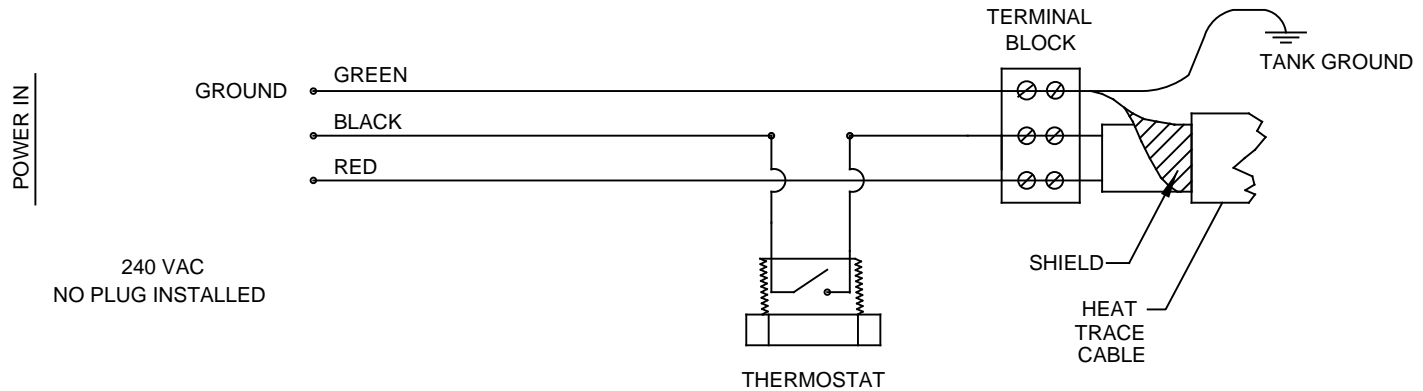

**MODEL 7603BL240
ELECTRICAL DETAIL**

FOR MODEL 7603BL240:

1. CORD SET SHALL BE LISTED TO UL 817 AND CSA-C22.2 NO. 21 AND PROVIDED WITH 3 WIRE GROUNDING TYPE ATTACHMENT PLUG RATED 240 V, MIN. 15 A.
2. THE FLEXIBLE CORD TYPE SHALL BE TYPE S, SE, SJ, SJE, SJO, SJO, SJTO, SJTOO, SO, SOO, ST, STO, OR STOO AND HAVE A TYPE LETTER SUFFIX OF "W," "W-A" OR "OUTDOOR."
3. THE CORD SET SHALL BE MIN. 6 FT IN LENGTH AND MIN 18 AWG SIZE FOR FLEXIBLE POWER SUPPLY CORD.
4. LISTED STRAIN RELIEF BUSHING SUITABLE FOR CORD SET SIZE AND OUTDOOR USE SHALL BE USED.
5. ALL POWER CONNECTIONS MUST BE MADE ACCORDING TO NEC/CEC CODE USING FLEXIBLE CONDUIT OR CABLE RATED FOR NEMA/TYP E 4 – NO RIGID CONNECTION PERMITTED. MODEL 7603BL240 REQUIRES MINIMUM NEMA/TYP E 4 COMPLIANT EQUIPMENT.
6. THE FIELD INSTALLED POWER SUPPLY CORD SET NEEDS TO BE INSTALLED BY QUALIFIED PERSONNEL.
7. ALL MODELS MUST HAVE A GROUND FAULT PROTECTION DEVICE (30mA GFEPD) FOR HEAT TRACE. ELECTRICAL CURRENTS MAY BE INSUFFICIENT TO TRIP A CONVENTIONAL CIRCUIT BREAKER. ALL INSTALLATIONS MUST BE INSTALLED IN COMPLIANCE WITH LOCAL, STATE, AND/OR FEDERAL CODES.

		Haws [®]		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
				MODEL(S) 7603BL / 7603BL240 ELECTRICAL SCHEMATIC	
ECN NO. 5235	REVISED PER BY: MJ	DATE 10/11/17	CHKD. MJ	SCALE: 1:1	DRAWING TYPE: ELECTRICAL
APPROVED: MJ	DATE: 05/29/18	SHEET 1 OF 1		SIZE: A	REVISION 1