

KT0010 / KT0010C / KT0010CS

General Description

- Kit for recessed mediflow® hand dryer (**hand dryer not included**).
- The kit for recessed mediflow® makes the mediflow® hand dryer suitable for the compliance of the ADAAG norm (US) - that limits to 4" the horizontal projection of the devices installed in bathrooms for public use -, bestowing on that hand dryer the quality of "specific for the disabled".
- Maximum robustness and vandal-proofness.
- Excellent integration and aesthetical level.

Components & Materials

- **KT0010:** steel kit for recessed Mediflow hand dryer (**hand dryer not included**), Epoxy painted.
- **KT0010C:** stainless steel AISI 304 kit for recessed Mediflow hand dryer (**hand dryer not included**), bright finish.
- **KT0010CS:** stainless steel AISI 304 kit for recessed Mediflow hand dryer (**hand dryer not included**), satin finish.
- **CABINET:** Electro-galvanized steel, 1/16" thick, with 16 screw holes of Ø 1/4" for mounting on the wall, it includes 4 M5 bolts welded on top of the base plate for the fitting of the Mediflow hand dryer.
- **RUBBER SEAL:** grey rubber seal, offers a reinforcing outside protection that minimizes vibrations and noise.
- **FRAME:** made in steel, white Epoxy finished (KT0010) or in stainless steel AISI 304, bright (KT0010C) finish or satin finish (KT0010CS).
- Nuts and bolts for the fitting of the dryer to the kit and the frame to the wall included: 4 nuts DIN 934 M5, 4 washers DIN 125 M5, 4 stainless steel screws DIN 7981 1-9/32" x 3/16" and 4 wall plugs F8.

NOTE 1: Mediflow hand dryer not included.

NOTE 2: The nuts and bolts for the mounting of the cabinet to the wall are not included. The use of stainless steel nuts and bolts is recommended.

Technical Specifications

Cabinet dimensions - 16-3/4" x 11- 5/8" x 3"	Frame dimensions - 18-7/8" x 13 - 3/8" x 1/16"
Installation height (Men toilets) - 41" to frame bottom	Installation height (Women toilets) - 39" to frame bottom
Installation height (Children toilets)	31 1/8" to frame bottom
Installation height (Disasbled toilets)	33 1/8" to frame bottom
Horizontal projection of the assembly	3-9/16"
Wall accommodation	3 3/8" depth

Operation

No specific instructions for its use required.

Please mark the selected item



code

KT0010

material
steel
finish
white epoxy



code

KT0010C

material
stainless steel
finish
bright



code

KT0010CS

material
stainless steel
finish
satin

Installation


Verify all rough-in dimensions prior to installation and proceed to install according to the dimensions recommended in the figures.

Guide specification


Kit for recessed mediflow® hand dryer (**hand dryer not included**) should be made of electro-galvanized steel iron cabinet, 1/16" thick, and a steel frame (KT0010) white Epoxy painted or a stainless steel AISI 304 frame, bright (KT0010C) or satin finish (KT0010CS). The cabinet should be fixed means 16 screw holes of Ø 1/4" for mounting on the wall, it should include 4 M5 bolts welded on top of the base plate for the fitting of the mediflow® hand dryer. Grey rubber seal should be included to offer a reinforcing outside protection that minimizes vibrations and noise. The steel or stainless steel AISI 304 frame should be 1/16" thick, with 4 screw holes of Ø 23/64" for mounting on the wall. Nuts and bolts for the fitting of the dryer to the kit and the frame to the wall should be included as follows: 4 nuts DIN 934 M5, 4 washers DIN 125 M5, 4 stainless steel screws DIN 7981 1-9/32" x 3/16" and 4 wall plugs F8. Overall dimensions shall be 16-3/4" x 11-5/8" x 3" for the cabinet and 18-7/8" x 13-3/8" x 1/16" for the frame. Unit shall comply with ADAAG norm (US) for the removal of architectural barriers.

Kit for recessed Mediflow® hand dryer should be model KT0010, frame in steel white epoxy painted or model KT0010C, frame in stainless steel AISI 304, bright finish or model KT0010CS, frame in stainless steel AISI 304, satin finish, manufactured by Saniflow Corp., 3325 NW 70th Avenue, Miami, FL 3312, USA.


MOUNTING

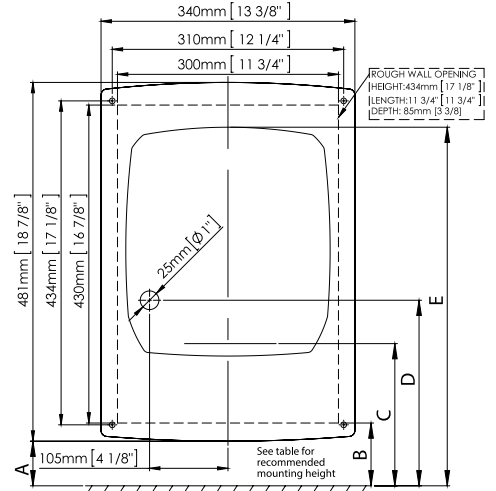

KT0010B / KT0010C / KT0010CS

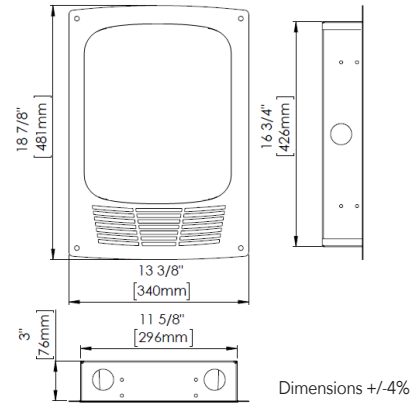


Recommended heights from floor

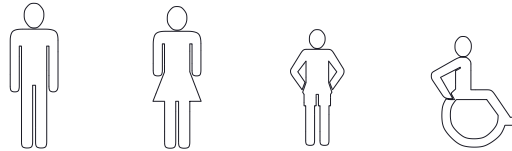

	Male	Female	Child	Disabled
A To metal frame	41" (104cm)	39" (99cm)	31 1/8" (79cm)	33 1/8" (84cm)
B To wall opening	41 3/4" (106cm)	39 3/4" (101cm)	31 7/8" (81cm)	33 7/8" (86cm)
C To sensor top	46 1/8" (117cm)	44 1/8" (112cm)	36 1/4" (92cm)	38 1/4" (97cm)
D To electrical entry point	48 3/8" (123cm)	46 1/2" (118cm)	38 5/8" (98cm)	40 1/2" (103cm)
E To top of machine	57 1/8" (145cm)	55 1/8" (140cm)	47 1/4" (120cm)	49 1/4" (125cm)

Serial mounting

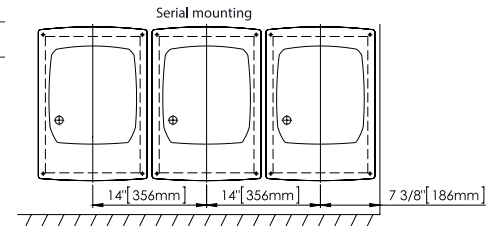

Job: _____

Model number: _____

Variations: _____

Architect / Engineer: _____

Contractor: _____

Customer / Wholesaler: _____

City / State / Country: _____

Date: _____

Quantity: _____

Saniflow Corp reserves the right to make changes and/or modifications to the products and their specifications without warning or notice.

For further info please contact SANIFLOW on: Toll free: **1-877-222-9125** or visit our website at **www.saniflowcorp.com**

Tel: +1 (305) 424 2433 Fax: +1 (305) 424 2435 · sales@saniflowcorp.com