

### **CODE NUMBER**

12001006

#### DESCRIPTION

SU-1200 Urinal and CROWN 186 Flushometer.

### **COMPONENTS**

Flushometer: Code 3122665Urinal: Code 1101200

### **DETAILS**

• Flush Volume: 0.125 gpf (0.5 Lpf)

• Nominal Dimensions: 14 ½"  $\times$  20  $^{3}$ /4"  $\times$  25  $^{1}$ /4" (368  $\times$  527  $\times$  641mm)

### **FLUSHOMETER FEATURES**

- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Fixed Volume Piston with Filtered O-ring Bypass
- Sweat Solder Adapter with Cover Tube and Cast Set Screw Wall Flange
- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine Resistance
- Valve designed to accept Low and Ultra-Low Consumption Pistons only to ensure Water Conservation
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap

# **FIXTURE FEATURES**

- Wall hung vitreous top spud china
- Large footprint to cover old caulk lines
- Washdown flushing action
- 3/4" I.P.S. top spud inlet
- 2" NPT outlet flange
- All mounting hardware included
- Integral flushing rim
- 100% factory flush tested
- Carrier not included



### **COMPLIANCES & CERTIFICATIONS**

















(ADA Compliant, BAA Compliant, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, cUPC Green Certified, Green Globes Water Credit, LEED V4 Water Efficiency Credit, Satisfies LEED Credits)

# **DOWNLOADS**


- Retrofit Urinal Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads

## **NOTES**

All information contained within this document subject to change without notice.



# **ROUGH-IN**

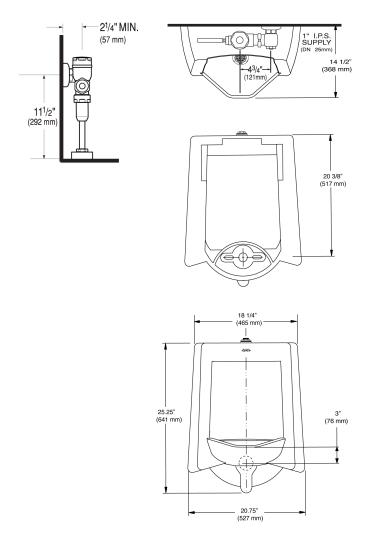

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com