

### **CODE NUMBER**

12001415

### **DESCRIPTION**

SU-1200 Urinal and SLOAN 8186 Flushometer.

### **COMPONENTS**

Flushometer: Code 3790068Urinal: Code 1101200

### **DETAILS**

• Flush Volume: 0.5 gpf (1.9 Lpf)

• Nominal Dimensions: 14 ½"  $\times$  20 ¾"  $\times$  25 ¼" (368  $\times$  527  $\times$  641mm)

## **FLUSHOMETER FEATURES**

- Vacuum Breaker with Flush Connection
- Sweat Solder Adapter with Cover Tube and Cast Wall Flange
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Spud Coupling and Spud Flange for 3/4" Top Spud
- "Low Battery" Flashing LED
- Courtesy Flush® Override Button
- No External Volume Adjustment to Ensure Water Conservation
- Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- Synthetic rubber seals for chloramine resistance
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection
- Engineered Plastic Cover with replaceable Lens Window
- Four (4) Size AA Batteries included
- High Chloramine Resistant PERMEX® Synthetic Rubber Diaphragm with Linear Filtered Bypass and Vortex Cleansing ActionTM

# **FIXTURE FEATURES**

- Wall hung vitreous top spud china
- Large footprint to cover old caulk lines
- · Washdown flushing action
- 3/4" I.P.S. top spud inlet
- 2" NPT outlet flange
- All mounting hardware included
- Integral flushing rim
- 100% factory flush tested
- Carrier not included



### **COMPLIANCES & CERTIFICATIONS**





















(ADA Compliant, BAA Compliant, BREEAM Water Credit, cUPC Green Certified, EPD, Green Globes Water Credit, HPD, LEED Materials & Resources EPD Credit, LEED Materials & Resources HPD Credit, LEED V4 Water Efficiency Credit, Satisfies LEED Credits)

#### **DOWNLOADS**


- Retrofit Urinal Installation Instructions
- G2 Optima Plus Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads


## NOTES

All information contained within this document subject to change without notice.



## **ROUGH-IN**



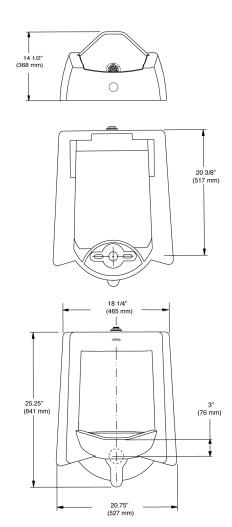

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com