

CODE NUMBER

70021301

DESCRIPTION

SU-7009 Urinal and ROYAL 186 ESS Flushometer.

COMPONENTS

- Flushometer: Code 3452625
- Urinal: Code 1107009

DETAILS

- Flush Volume: 0.25 gpf (0.9 Lpf)
- Nominal Dimensions: 14 ¾" x 14 187/1000" x 23 ½" (375 x 360 x 597mm)

FLUSHOMETER FEATURES

Quiet, Exposed, Dual Filtered Diaphragm Assembly, Chrome Plated Urinal


- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange w/Set Screw
- OPTIMA® EL-1500 Self-Adaptive Infrared Sensor with Indicator Light
- Non-Hold-Open Integral Solenoid Operator, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- High Back Pressure Vacuum Breaker Flush Connection with One-Piece Bottom Hex Coupling Nut, Spud Coupling and Flange for ¾" Top Spud
- Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine Resistance
- ¾" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection

FIXTURE FEATURES

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



COMPLIANCES & CERTIFICATIONS

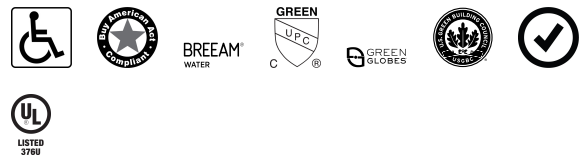

(ADA Compliant, BAA Compliant, BREEAM Water Credit, cUPC Green Certified, Green Globes Water Credit, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, UL Certified)

DOWNLOADS

- [Small Spud Urinal Installation Instructions](#)
- [SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide](#)
- [Additional Downloads](#)

NOTES

All information contained within this document subject to change without notice.

Technical drawings of the SUEZ SUEZ 1000 toilet fixture, showing side, top, and front views with dimensions in inches and millimeters.

Side View (Left):

- Overall width: 21 1/4" (57 mm)
- Height from top of fixture to top of electrical box: 2 1/2" (64 mm)
- Height from top of electrical box to top of supply: 1" (25 mm)
- Height from top of supply to center of supply: 4 3/4" (121 mm)
- Supply connection: 3/4" I.P.S. SUPPLY (DN 20 mm)
- Center of supply: C/O OF SUPPLY
- Height from top of fixture to center of supply: 11 1/2" (292 mm)
- Center of electrical box: C/O OF ELECTRICAL BOX

Top View (Middle):

- Overall width: 14 3/16" (360 mm)
- Overall depth: 10 1/4" (260 mm)
- Inner width: 6 3/4" (171 mm)
- Inner depth: 5" (127 mm)
- Height from finished floor to top of bowl: 23 1/2" (597 mm)
- Height from finished floor to center of bowl: 19" (483 mm)
- Height from finished floor to bottom of bowl: 10 1/8" (257 mm)
- Height from finished floor to top of bowl rim: 13 3/8" (340 mm)
- Height from finished floor to bottom of bowl rim: 5 1/8" (143 mm)
- Bottom width: 4" (102 mm)
- Bottom depth: 2" (50 mm) NPT Outlet

Front View (Right):

- Overall width: 14 3/4" (375 mm)
- Height from finished floor to top of bowl rim: 11 1/2" (292 mm)
- Height from finished floor to center of bowl: 19" (483 mm)
- Height from finished floor to bottom of bowl: 11 5/8" (295 mm)
- Height from finished floor to top of bowl rim: 13 3/8" (340 mm)
- Height from finished floor to bottom of bowl rim: 5 1/8" (143 mm)
- Height from finished floor to top of bowl rim: 24" (610 mm)
- Height from finished floor to bottom of bowl rim: 17" (432 mm) ADA*
- Height from finished floor to top of bowl rim: 18 3/8" (467 mm)
- Height from finished floor to bottom of bowl rim: 11 3/8" (289 mm) ADA
- Outlet: C/O Outlet

Page 2 of 2