


# BASYS™

Any Application. Any Environment.™

## Low



### **Lean and Mean**

The modest profile minimizes the potential for vandalism, making this body type ideal for high-use, low-security environments. For extra assurance against damage, opt for the capacitance model.

### ***Ideal for:***

*High-use environments*



# BASYS™

Any Application. Any Environment.™

## Low Integrated Base



### **Extra Tough**

Ideal for the most demanding high-use environments. The integrated base offers added durability via two attachment points. The capacitance model is especially robust.

### ***Ideal for:***

*Demanding environments with intense use, high traffic or high potential for abuse*




**SLOAN®**

# BASYS™

Any Application. Any Environment.™

## Mid

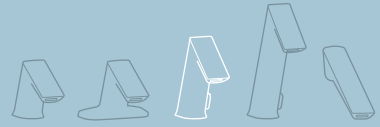

### **Well Adjusted**

This model provides optimal height and proportions for effective hand washing, making it well suited for most restroom environments.

### **Ideal for:**

*Basic use*


*Moderate traffic*



# BASYS™

Any Application. Any Environment.™

## High



### **Room to Spare**

The tall profile offers a distinct aesthetic as well as an optimized delivery angle that permits a greater wash area. Users can scrub past their forearms if desired.

### **Ideal for:**


*Professional hygiene requirements  
Vessel sink applications*



# BASYS™

Any Application. Any Environment.™

## Wall

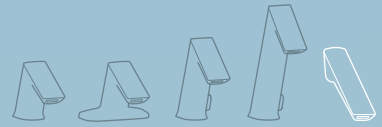

### **Sleek Simplicity**

Elimination of the deck translates into uninterrupted clearance and a striking appearance. The spout attaches directly to a valve box in the wall, making this body type easy to install and secure.

### **Ideal for:**

*Medium-use environments*

*Vessel sink applications*



**SLOAN®**

# BASYS™

Any Application. Any Environment.™

Informed by in-depth research and backed by Sloan's century of experience and proven technologies, BASYS offers a modular platform of body types, features and components to meet the needs of any application or environment.



## Low



The modest profile minimizes the potential for vandalism, making this body type ideal for high-use, low-security environments. For extra assurance against damage, opt for the capacitance model.\*

EFX-3

Active Infrared



Capacitance



## Low Integrated Base



Ideal for the most demanding high-use environments. The integrated base offers added durability via two attachment points. The capacitance model is especially robust.\*

EFX-6

Active Infrared



Capacitance



## Mid



This model provides optimal height and proportions for effective hand washing, making it well suited for most restroom environments.

EFX-2

Active Infrared



## High



The tall profile offers a distinct aesthetic as well as an optimized delivery angle that permits a greater wash area. Users can scrub up to their forearms if desired.

EFX-1

Active Infrared



## Wall



Elimination of the deck translates into uninterrupted clearance and a striking appearance. The spout attaches directly to a valve box in the wall, making this body type easy to install and secure.

EFX-8

Active Infrared



**\*Sensing Options:** Active Infrared sensing is the standard on all models and is designed to provide above-deck access to key components, and offer additional user enhancements. Capacitance sensing does not utilize a vulnerable sensor window and critical components are protected in a watertight, below-deck box. Electronics on all models protected to IP-67.

## UNIVERSAL FEATURES

### One tool service

A single allen wrench provides access to all key components. No additional tools required.

### Shared parts

Interchangeability of components simplifies orders, upgrades, repairs and maintenance.

### Visible diagnostics

Individual external diagnostic LEDs indicate the health and status of key components.

### Automatic shut-off

One twist of the solenoid caddy shuts off water supply to facilitate cleaning or replacing the filter.

### Power options

Multiple power harvesting options are available to suit the unique needs of each environment.

### Sleep mode

With a touch, staff can temporarily turn off the water in order to clean a sink.

### Line purge

All models include a line purge function to eliminate the stagnant water that can lead to bacterial growth.

### Flow rates

Three spray inserts – multi-laminar spray, full stream aerated and full stream laminar – offer options to adjust feel and flow rate.

### Warranty

All products have a standard three-year limited warranty.



For more in-depth specifications, or to build a BASYS™ faucet online, visit: [sloanvalve.com/basys](http://sloanvalve.com/basys)

Sloan Headquarters:  
10500 Seymour Ave. Franklin Park, IL 60131  
T: 847.671.4300 / 800.9.VALVE.9  
F: 847.671.6944 / 800.447.8329

©2013 Sloan Valve Company. All rights reserved.

Legend: Hardwired Battery Powered Solar Turbine

**SLOAN®**