



## GEM•2® Model 186 HEU XL Flushometer

### Description

Exposed, high-efficiency urinal flushometer for 3/4" top spud urinals.

### Flush Cycle

- ☐ Model 186-0.125 XL High Efficiency (0.125 gpf/0.5 Lpf)  
Code: 3072619
- ☐ Model 186-0.25 XL High Efficiency (0.25 gpf/1.0 Lpf)  
Code: 3072621
- ☐ Model 186-0.5 XL High Efficiency (0.5 gpf/1.9 Lpf)  
Code: 3072607

### Specifications


Quiet, Exposed, Piston Type, Chrome Plated Urinal Flushometer with the following features:

- Fixed Volume Piston with Filtered O-ring Bypass
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Adjustable Tailpiece
- Vacuum Breaker Flush Connection
- Spud Coupling, Spud Flanges for 3/4" Top Spud Urinal
- Sweat Solder Kit with cover tube and Cast Wall Flange with Set Screw for 3/4" Supply
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME A112.19.2.

### Accessories

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

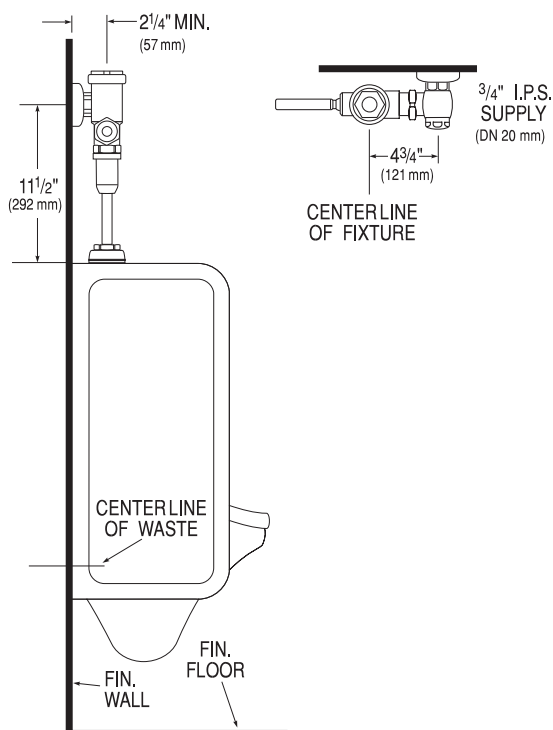

This space for Architect/Engineer approval

Job Name _____	Date _____
Model Specified _____	Quantity _____
Variations Specified _____	
Customer/Wholesaler _____	
Contractor _____	
Architect _____	

The information contained in this document is subject to change without notice.



**SLOAN • 10500 SEYMOUR AVE. • FRANKLIN PARK, IL 60131**

Ph: 1-800-982-5839 • Fax: 1-800-447-8329 • [www.sloanvalve.com](http://www.sloanvalve.com)