

# MCR-115-A

## MICRO Plumb® PRODUCTS Single Shower Control


### Description

Electronic shower control used with MICRO Plumb® push buttons and solenoids to control a single shower.


### Specifications

- 24 VAC-50/60 Hz operating voltage
- RJ-11 6 position, 4 pin connections for push button and solenoid connections
- Adjustable run time of 30 seconds to 15 minutes (±5%)
- Splash-proof enclosure w/mounting kit
- Can be remotely located 15 feet from shower push button (this distance can be increased to a max. of 200' (with the purchase of MICRO Plumb® extension cord kit for push buttons and solenoids).


Enclosure Cover

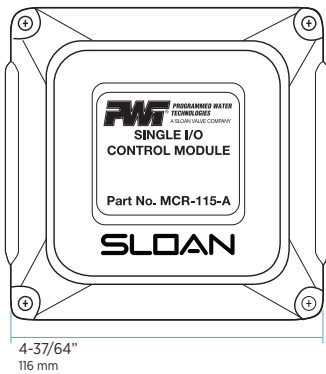

Side View

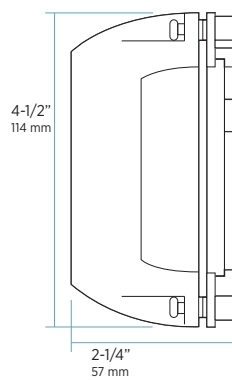

Enclosure Base

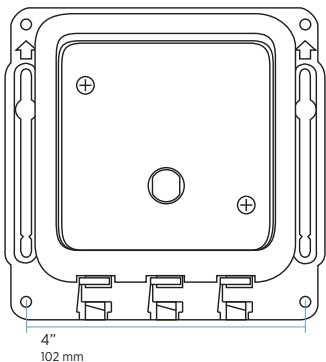

Water Connects Us™

Headquarters • 10500 Seymour Avenue • Franklin Park, IL 60131  
P: 847-671-4300 / 800-9-VALVE-9 • F: 847-671-4380 / 800-447-8329

The information contained in this document is subject to change without notice.