

► Code Number

3142611

► Description

Exposed Urinal Flushometer for 3/4" top spud urinals. Especially suited for harsh water conditions.

► Flush Cycle

0.5 gpf/1.9 Lpf

► Specifications

Quiet, Exposed, Adjustable Piston Type, Chrome Plated Urinal Flushometer with the following features:

- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Vacuum Breaker Flush Connection
- Spud Coupling and Flange for 3/4" Top Spud
- Self-cleaning Xpelor® Bypass
- Stamped Wall Flange
- Ultra High Copper, Low Zinc Brass Castings for Dezincification and Salt Water Resistance
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX® Rubber Compound for Chloramine Resistance
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap


Valve Body, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037, ANSI/ASME A112.19.2

► Variations

Ground Joint Connection

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories

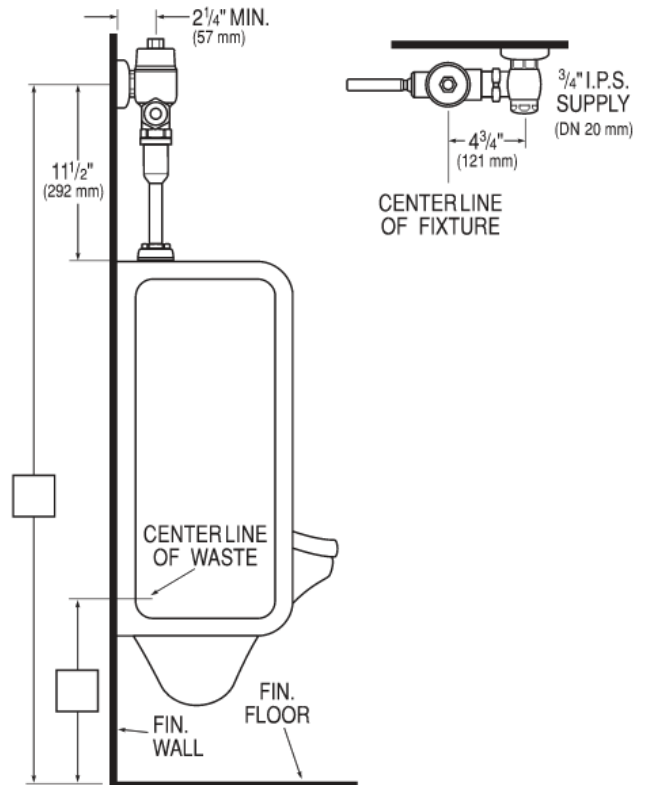

► Compliance & Certifications



Made In The
USA



This space for Architect/Engineer Approval