P4-BZ


4-1/8 [103.5] WIDE BRONZE DECORATIVE GRATE

SPECIFICATION SHEET

TAG ____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please	Item	Part	Item
Check	No.	Number	I.D.
✓			
	1	64304	P4-BZ

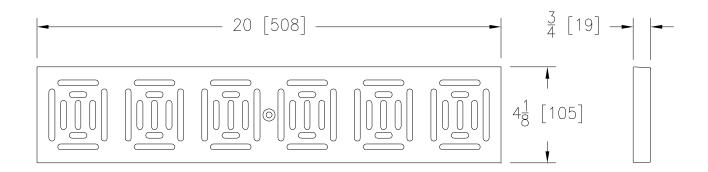

GRATE ENGINEERING SPECIFICATION: ZURN P4-BZ

20" [1016mm] X 4-1/8" [105mm] Bronze Decorative Grate weighing 4.5 lbs. per linear foot [6.7 kg/m]. The grate has an open area of 11.5 square inches per linear foot [243.4 cm²/m] DIN Rating of Class A, ANSI rating of Light-Duty.

BZ - Bronze Decorative Grate		
Material: Bronze		
DIN Rating: Class A		
Weight:4.5 lbs/ft. [6.7 kg/m]		
Open Area: 11.5 in ² /ft. [243.4 cm ² /m]		
ANSI Rating: Light-Duty		
Application: Decorative Heel-Proof		
Slot Width/Hole Size: 0.25" [6.4mm]		
ADA: No		
H-20: No		
FAA: No		

^{*} Regularly furnished unless otherwise specified.

Page 1 of 8

В

FT965

Rev.



P4-CG


4-1/8 [103.5] WIDE CAST IRON SLOTTED GRATE

SPECIFICATION SHEE	Ţ
--------------------	---

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check		Part Number	Item I.D.
V	2	66402	P4-CG

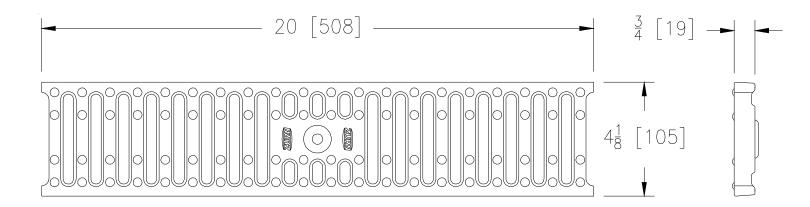

GRATE ENGINEERING SPECIFICATION: ZURN P4-CG

40" [1016mm] X 4-1/8" [105mm] Cast Iron Slotted Grate weighing 5.2 lbs. per linear foot [7.7 kg/m]. The grate has an open area of 12.2 square inches per linear foot [258.2 cm²/m] DIN Rating of Class B, ANSI rating of Medium-Duty.

CG - Cast Iro	on Slotted Grate
Material: Ca	st Iron
DIN Rating:	Class B
Weight:5.2 II	bs/ft. [7.7 kg/m]
Open Area:	12.2 in ² /ft. [258.2 cm ² /m]
ANSI Rating	: Medium-Duty
Application:	Light Vehicle Traffic
Slot Width/He	ole Size: 0.375" [9.5mm]
ADA:	No
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.

Page 2 of 8



P4-FG


4-1/8 [103.5] WIDE FABRICATED GALVANIZED STEEL SLOTTED GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please	Item	Part	ltem
Check	No.	Number	I.D.
✓			
	3	62294	P4-FG

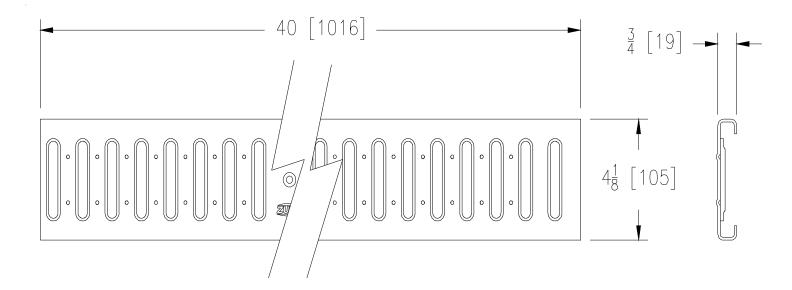

GRATE ENGINEERING SPECIFICATION: ZURN P4-FG

40" [1016mm] X 4-1/8" [105mm] Fabricated Galvanizes Slotted Grate weighing 1.8 lbs. per linear foot [2.7 kg/m]. The grate has an open area of 10.2 square inches per linear foot [215.9 cm²/m] DIN Rating of Class A, ANSI rating of Light-Duty.

FG - Fabricate	d Galvanized	Steel Slotted Grate
Material: Galva	anized Steel	
DIN Rating:	Class A	
Weight:1.8 lbs.	/ft. [2.7 kg/m]	
Open Area: 10	.2 in ² /ft. [215.9	cm²/m]
ANSI Rating: Li	ight-Duty	
Application: F	Pedestrian	
Slot Width/Hole	e Size: 0.375	" [9.5mm]
ADA:	No	
H-20:	No	
FAA:	No	

^{*} Regularly furnished unless otherwise specified.

www.zurn.com

Page 3 of 8



P4-FS


4-1/8 [103.5] WIDE FABRICATED STAINLESS STEEL SLOTTED GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please		Part	Item
Check		Number	I.D.
	4	62294	P4-FS

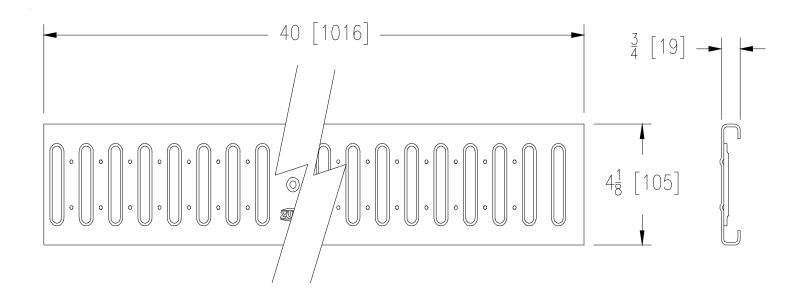

GRATE ENGINEERING SPECIFICATION: ZURN P4-FS

40" [1016mm] X 4-1/8" [105mm] Fabricated Stainless Steel Slotted Grate weighing 1.8 lbs. per linear foot [2.7 kg/m]. The grate has an open area of 10.2 square inches per linear foot [215.9 cm²/m] DIN Rating of Class A, ANSI rating of Light-Duty.

FS - Fabricated Stainless Steel Slotted Grate				
Material: Stainle	ess Steel			
DIN Rating: C	Dlass A			
Weight:1.8 lbs/ft	t. [2.7 kg/m]			
Open Area: 10.2	2 in ² /ft. [215.9 cm ² /m]			
ANSI Rating: Light-Duty				
Application: Ped	estrian, Food/Bev. Process			
Slot Width/Hole	Size: 0.375" [9.5mm]			
ADA:	No			
H-20:	No			
FAA:	No			

^{*} Regularly furnished unless otherwise specified.

Page 4 of 8

Prod. | Dwg. No.

FT965



P4-HPP


SPECIFICATION SHEET

TAG

4-1/8 [103.5] WIDE HEEL-PROOF SLOTTED GRATE

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please	Item	Part	Item
Check	No.	Number	I.D.
✓			
	5	64109	P4-HPP

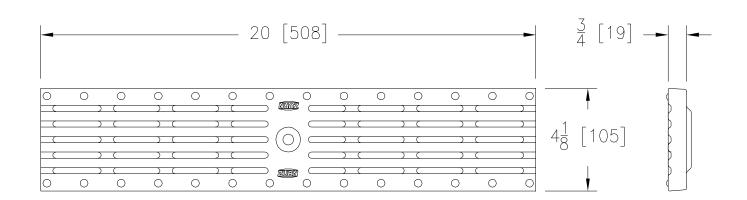

GRATE ENGINEERING SPECIFICATION: ZURN P4-HPP

20" [508mm] X 4-1/8" [105mm] High Density Polyethylene (HDPE0 Heel-Proof Grate weighing 0.78 lbs. per linear foot [1.2 kg/m]. The grate has an open area of 10.3 square inches per linear foot [218 cm²/m] DIN Rating of Class A, ANSI rating of Light-Duty, ADA compliant.

HPP - Heel-Pr	oof Slotted Grate
Material: HDF	E
DIN Rating:	Class A
Weight:0.78 lb	s/ft. [1.2 kg/m]
Open Area: 10	3 in ² /ft. 218 cm ² /m]
ANSI Rating: L	ght-Duty
Application: Pe	destrian, Chem., Swimming Pool
Slot Width/Hol	e Size: 0.25" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No

^{*} Regularly furnished unless otherwise specified.

Page 5 of 8




P4-PG

4-1/8 [103.5] WIDE PERFORATED GALVANIZED STEEL GRATE

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check		Part Number	Item I.D.
✓			
	6	62295	P4-PG

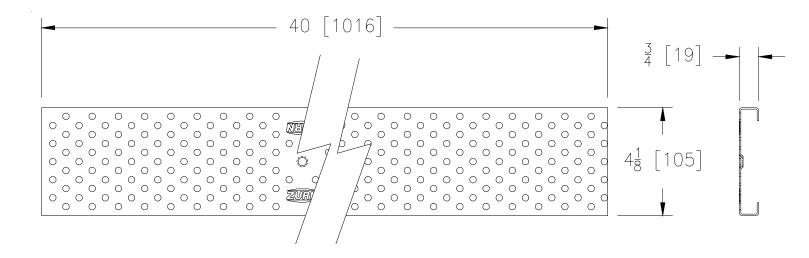

GRATE ENGINEERING SPECIFICATION: ZURN P4-PG

40" [1016mm] X 4-1/8" [105mm] Galvanized Steel Perforated Grate weighing 1.2 lbs. per linear foot [1.8 kg/m]. The grate has an open area of 5.9 square inches per linear foot [124.9 cm²/m] DIN Rating of Class A, ANSI rating of Light-Duty, ADA compliant.

PG - Perforated Galvanized Steel Grate
Material: Galvanized Steel
DIN Rating: Class A
Weight:1.2 lbs/ft. [1.8 kg/m]
Open Area: 5.9 in ² /ft. [124.9 cm ² /m]
ANSI Rating: Light-Duty
Application: Heel-Proof, Pedestrian Traffic
Slot Width/Hole Size: 0.25" [6.4mm]
ADA: Yes
H-20: No
FAA: No

^{*} Regularly furnished unless otherwise specified.

Page 6 of 8

FT965

Prod. | Dwg. No.




P4-PS

4-1/8 [103.5] WIDE PERFORATED STAINLESS STEEL GRATE

SPECIFIC	CATION	SHEE	
TAG			

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please	Item	Part	Item
Check	No.	Number	I.D.
\checkmark			
	7	62295	P4-PS

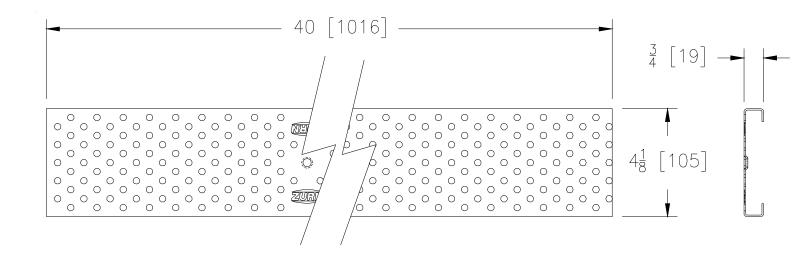

GRATE ENGINEERING SPECIFICATION: ZURN P4-PS

40" [1016mm] x 4-1/8" [105mm] Stainless Steel Perforated Grate weighing 1.2 lbs. per linear foot [1.8kg/m]. The grate has an open area of 5.9 square inches per liner foot [124.9 cm²/m], DIN rating of Class A, ANSI rating Light-Duty, ADA compliant.

PS - Perforated Stainless Steel Grate		
Material: Stainless Steel		
DIN Rating: Class A		
Weight:1.2 lbs/ft. [1.8 kg/m]		
Open Area: 5.9 in ² /ft. [124.9 cm ² /m]		
ANSI Rating: Light-Duty		
Application: Heel-Proof, Food/Bev. Process		
Slot Width/Hole Size: 0.25" [6.4mm]		
ADA: Yes		
H-20: No		
FAA: No		

^{*} Regularly furnished unless otherwise specified.

Page 7 of 8



P4-SC


4-1/8 [103.5] WIDE S.S. SOLID COVER

SPECI	FICATI	IONS	HEET
--------------	---------------	-------------	------

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please	Item	Part	ltem
Check	No.	Number	I.D.
✓			
	8	314389	P4-SC

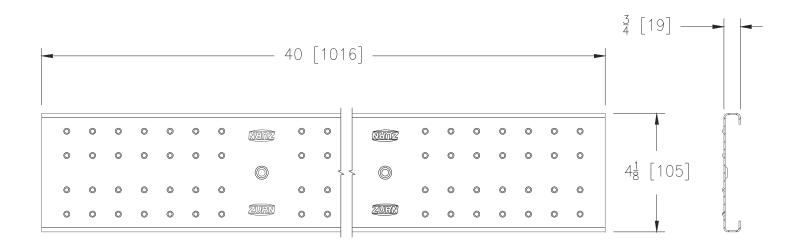

SC GRATE ENGINEERING SPECIFICATION: ZURN P4-SC

40" [1016mm] X 4-1/8" [105mm] Stainless steel fabricated solid cover weighing 1.74 lbs per linear foot [2.6 kg/m]. Grate conforms to DIN rating A, ANSI Rating of Light-Duty, ADA Compliant and ASTM specification A240 Type 304 (316 by request).

SC - S.S. Solid Cover			
Material: Type 304 Stainless Steel			
DIN Rating: Class A			
Weight: 1.74 lbs/ft. [2.6 kg/m]			
Open Area: N/A			
ANSI Rating: Light-Duty			
Application: Heel-Proof Pedestrian			
Slot Width/Hole Size: N/A			
ADA: Yes			
H-20: No			
FAA: No			

^{*} Regularly furnished unless otherwise specified.

Page 8 of 8