


GT2702

Polyethylene Grease Interceptor

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

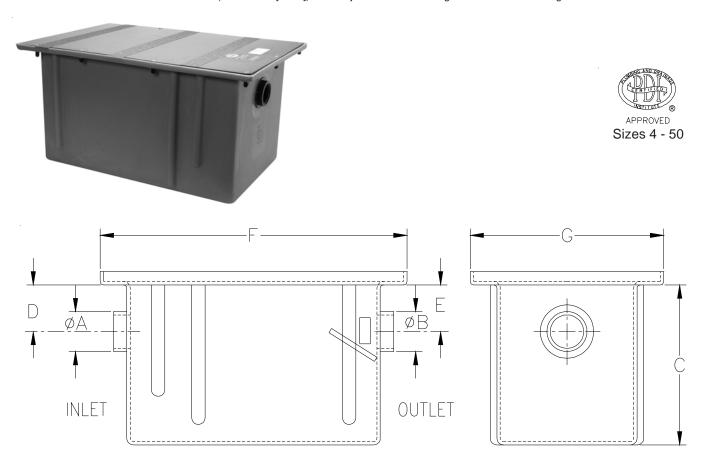

| Product | 'A' & 'B' Inlet/Outlet | Flow Rate G.P.M. [L.P.M.] | Grease Capacity Lbs. [kg] | Liquid Holding Capacity Gal. [L] | Dimensions In Inches [mm] | | | | |
|-----------|---------------------------|---------------------------------|---------------------------------|--|---------------------------|-------------|-------------|--------------|--------------|
| | | | | | С | D | Е | F | G |
| GT2702-04 | 2 [51] FEMALE NPT | 4 [15] | 8 [4] | 1.5 [5.7] | 9-1/2 [241] | 2 [51] | 2 [51] | 15 [381] | 10 [254] |
| GT2702-07 | 2 [51] FEMALE NPT | 7 [26] | 14 [6] | 4.6 [17.4] | 11 [279] | 3-1/4 [83] | 3-1/4 [83] | 20 [508] | 14-1/2 [368] |
| GT2702-10 | 2 [51] FEMALE NPT | 10 [38] | 20 [9] | 6 [22.7] | 12 [305] | 3-1/2 [89] | 3-1/2 [89] | 23 [584] | 14-1/2 [368] |
| GT2702-15 | 2 [51] FEMALE NPT | 15 [57] | 30 [14] | 10.2 [38.6] | 13 [330] | 3-1/2 [89] | 3-1/2 [89] | 23 [584] | 19-1/2 [495] |
| GT2702-20 | 2 [51] FEMALE NPT | 20 [76] | 40 [18] | 15 [56.8] | 14 [356] | 3-1/2 [89] | 3-1/2 [89] | | 19-1/2 [495] |
| GT2702-25 | 3 [76] FEMALE NPT | 25 [95] | 50 [23] | 20.8 [78.7] | 17 [432] | 4 [102] | 4 [102] | 32-1/2 [826] | 19-1/2 [495] |
| GT2702-35 | 3 [76] FEMALE NPT | 35 [132] | 70 [32] | 26.1 [98.8] | 18 [457] | 4 [102] | 4 [102] | 32-1/2 [826] | 22 [559] |
| GT2702-50 | 3 [76] FEMALE NPT | 50 [189] | 100 [45] | 35.5 [134.4] | 18 [457] | 4 [102] | 4 [102] | 37 [940] | 25 [635] |
| GT2702-75 | 3 [76] FEMALE NPT | 75 [284] | 150 [68] | 61.8 [234] | 25 [635] | 5-3/4 [146] | 5-3/4 [146] | 44-1/4[1124] | 25 [635] |

GT2702 Grease Interceptor

Recommended for removing and retaining grease from wastewater in kitchen and restaurant areas where food is prepared. Constructed of non-corrosive polyethelene, the interceptor handles continuous temperatures to 212° F. Trap is furnished with NPT connections, removable flow diffusing baffles and external vented flow control device.

___ 6 [152] Extension

Prod. | Dwg. No. GT2702

^{*} Regularly furnished unless otherwise specified.