

1.1 gpf Pressure Assist, Elongated, Two-Piece Toilet

TAG					

Architectural/Engineering Specification:

Zurn Z5571 Vitreous China floor mounted, Two Piece toilet, High Efficiency 1.1 gpf / 4.2 Lpf, Pressure Assisted tank, Elongated standard height rim and 12" Rough-in.

Zurn Z5571 utilizes EcoFlush™ technology maximize water savings and provide an ultra-quiet flush in demanding, high-traffic commercial areas that require a high performance toilet system.

Product Features:

- 1.1 gpf (gallons per flush)
- High Efficiency Toilet (HÉT) reduces potable water usage over 30%
- Vitreous china
- · Pressure assisted tank
- High performance EcoFlush™ technology
- Easy touch handle actuation
- Ultra quiet flush
- Siphon jet flush action
- 2-1/8" fully glazed trapway
- Operating pressure range 20-80 psi
- Elongated front rim
- Chrome plated handle
- · Large water surface area
- Includes bolt caps
- Shipping weight: 95 lbs

Options:

-VL

Vitreous China lid with vandal-proof lockdown

Recommended Trim:

Z5958SS-EL

Elongated, white, closed front toilet seat with cover & stainless steel check hinge.

Z5972-COMB

Closet bolt/wax ring kit.


Compliance and Certification:WaterSense Compliant

Z8800-CR

Standard stop with flexible closet riser.

Optional Trim:

Z5975-FLO-JR PVC Flo-Bowl Jr. closet flange kit

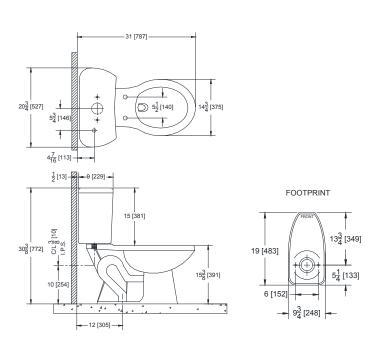

Rough-in/Overview dimensions for Z5571 Series

See Zurn One Systems for suggested packages.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

Fixture dimensions meet ASME A112.19.2/CSA B45.1 requirements. In Canada - Consult local codes and standards.

