


TAG

Exposed ZEMS6003AV-ULF-IS Model

Sensor Operated Hardwired 0.125 GPF High Efficiency Valve for use with 0.125 GPF Ultra Low Flow 3/4" Urinals

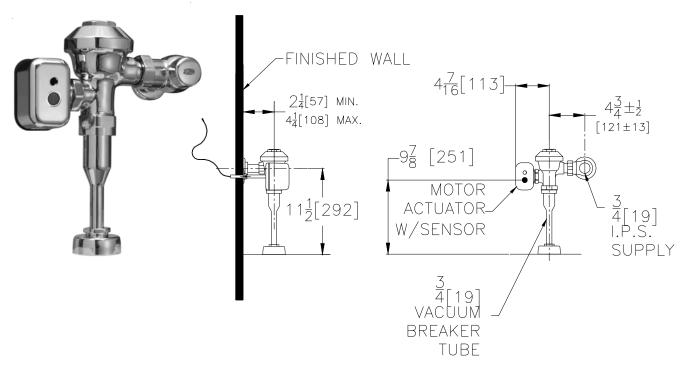

Suffix Options (Check/Specify Appropriate Options)

-VP Vandal Resistant Stop Screw
-YJ Split Ring Pipe Support
-YK Solid Ring Pipe Support
Other

Accessories (Order seperate as specified)

P6000-PC6 Plug-in Power Converter

(Up to 4 valves)

P6000-MJ Mini Junction Box

P6000-HW6 Hardwire Power Converter

(Up to 8 valves)

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-PC6 PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

ENGINEERING SPECIFICATION: ZURN ZEMS6003AV-ULF-IS AquaSense® 'AV' Exposed Hardwired Automatic Sensor Flush Valve For 3/4" Urinals- Exposed, quiet diaphragmtype, chrome plated, .125 GPF flushometer valve with a polished exterior. Complete with Zurn's AguaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant, filtered by-pass. The valve incorporates a motorized actuator, an integral infrared convergence-type proximity sensor and a manual push-button override into an all-metal, polished chrome plated housing. The valve is complete with high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection, vandal resistant stop cap, sweat solder kit, and a cast wall flange with set screw. Internal seals are made of chloramine resistant materials.

This space is for Architectural/Engineering Approval

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292