



**AMERICAN SPECIALTIES, INC.**


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0535

ISSUED: 1-87

REVISED: 9-04

**FIXED ANGLE TILT MIRROR**

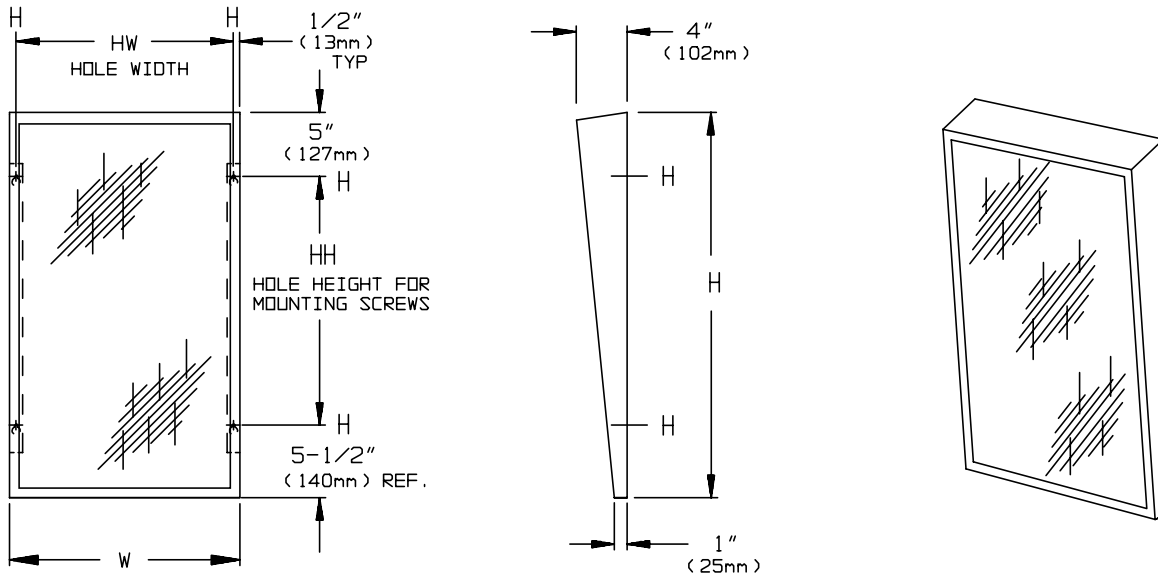

**SPECIFICATION**

Fixed Angle Tilted Mirror shall be fabricated of alloy 18-8 stainless steel, type 304, 20 gauge. Face shall be one piece construction free of miters or spot welded seams. All exposed surfaces shall have N°4 satin finish and be protected during shipment by plastic PVC film easily removable after installation. Concealed tamper resistant locking devices shall be provided. Mirror shall be \_\_\_\_\_ (INSERT GLAZING OPTION) and shall be warranted for 15 years against silver spoilage. Mirrors shall be supplied as standard with glazing option ' A '. For a complete description and other choices of glazing options, see the Mirror Glazing OPTIONS Chart.

Fixed Angle Tilted Mirror shall be Model N° 0535- \_\_\_\_\_ (insert size code) - \_\_\_\_\_ (insert glazing option) manufactured by American Specialties, Inc., Yonkers, NY 10701-4913.

**INSTALLATION**

Unit is surface mounted on wall or partition using four (4) N°10 self tapping screws (by others). Mounting holes through back are "keyhole" slots for hanging unit on pre-installed screws. Unit requires 5/8" (16mm) clearance at top to engage screws in keyhole slots. For compliance with ADA Accessibility Guidelines, bottom of reflecting surface should be installed 40" (1016mm) max. above finished floor.

**AVAILABLE MODELS**

MODEL NUMBER	DIMENSIONS			
	W	H	HW	HH
0535-1630-__	16" (406mm)	30" (762mm)	15" (381mm)	19-1/2" (495mm)
0535-1824-__	18" (457mm)	24" (610mm)	17" (432mm)	13-1/2" (343mm)
0535-1830-__	18" (457mm)	30" (762mm)	17" (432mm)	19-1/2" (495mm)
0535-1836-__	18" (457mm)	36" (914mm)	17" (432mm)	25-1/2" (648mm)
0535-2430-__	24" (610mm)	30" (762mm)	23" (584mm)	19-1/2" (495mm)
0535-2436-__	24" (610mm)	36" (914mm)	23" (584mm)	25-1/2" (648mm)

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.