

Specify color
(See color chart in back of catalog)
Model 2038 — Recessed
Model 2038-10 — Semi-Recessed
(recesses $3\%$ "; projects $3\%$ ")
Model 2038-11 — Surface-Mounted
(projects 7¾")
Accord Covice Colon Levelinete

#### Accent Series — Color Laminate

#### **Product Materials**

**CABINET:** 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with seamless corners and burr-free edges.

**DOOR:** 5/16" thick solid laminate, made of colored Melamine bonded under high pressure to a phenolic core. All exposed edges are machined smooth to a uniform dark finish. Attached to cabinet with full length, heavy duty stainless steel piano hinge. Equipped with two latches.

**TOWEL DISPENSER:** 22 gauge stainless steel. Rolled edge on dispenser opening.

**WASTE RECEPTACLE INSERT:** leakproof molded plastic.

### Capacity

Towel Dispenser — 1100 single-fold, 800 multi-fold or 600 C-fold paper towels. Waste Receptacle Insert — 11.2 gal. (1.5 cu. ft.)

## **Operation**

Towel dispenser holds single-fold, multi-fold or C-fold towels with use of special adaptor. Waste receptacle insert removable by opening cabinet door.


### Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 15¾"W x 54½"H x 7½"D (Semi-recessed unit only 4" deep). Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

# **Guide Specification**

Recessed combination towel dispenser and waste receptacle shall be fabricated of heavy gauge stainless steel. Cabinet door of 5/16" thick solid laminate with full length piano hinge and secured by two latches. Towel dispenser capacity 1100 single fold, 800 multi-fold or 600 C-fold towels. Removable 11.2 gal. leakproof molded plastic insert for waste receptacle.

Overall dimensions: 17%"W x 561/4"H x 73/4"D.

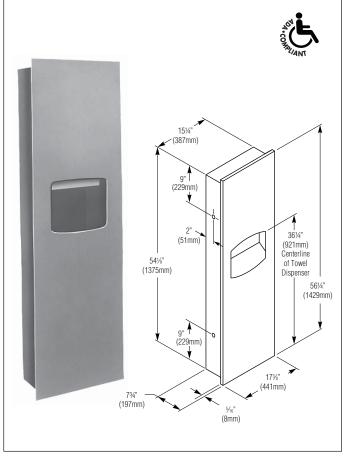

## **Optional Features**

Feature	Suffix
Two (2) tumbler locks	-15

# **ADA Compliant**

- Consult local and national accessibility codes for proper installation quidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer