LVGD1
Verge® Wash Basin – LVG-Series

- ADA and TAS compliant
- Serves one user at a time
- Elongated basin is constructed of Evero® natural quartz surface
- Select a Verge faucet or faucet by others
- Available in a variety of colors
- Compatible with Verge™ deck-mounted soap dispensers and faucets

Specifications

Accommodates one user. The units handle washroom traffic quickly and economically, while providing each user with personal space.

Construction

Basin

Evero Geo Series is a natural quartz surface made from a blend of bio-based resin, natural quartz, granite, and other exotic minerals. It is made of 25% recycled content.

Evero Pearl Series is a natural quartz surface made with bio-based resin, sea shells, recycled glass, and natural quartz. It is made of 70% recycled content.

Variations in the natural stone color, pattern, size, shape, and shade are inherent. Due to these unique characteristics, please expect subtle shade variations when units are installed adjacent to each other.

Access Panel

Panel is composed of decorative 300 series stainless steel.

Support Frame

Basin assembly and access panel are secured to a heavy gauge stainless steel support frame mounted to wall.

Vandal Resistance

Water supplies, valves, waste assembly and other optional items are concealed within the panel/frame.

Faucet Options

Choose from our 0.35 gpm (1.30 Lpm) or 0.50 gpm (1.90 Lpm) Verge Faucet – Crestt, Metro, Linea, and Zen Series. 4" Centerset and Centershank faucet hole drillings are available for faucets by others.

Soap Dispensers

Due to space limitations within the access panel, Verge deck-mounted soap dispensers are not available with LVGD1. Soap drillings available for soap by others.

Accessibility

Accessibility Code	Rim Height (maximum)	Notes
ADA	33½" (851)	At least one basin must meet dimensional requirements and have proper reach, knee, and toe clearance.
ADA/JUV Juvenile ADA	30½" (775)	At least one basin must meet dimensional requirements and have proper reach, knee, and toe clearance.

Product Compliance

Listed by IAPMO R&T to

- Uniform Plumbing Code (UPC)
- National Plumbing Code of Canada
- International Plumbing Code (IPC)
- IGC 156 and the requirements of CSA B45.5/IAPMO Z124 and ASME A112.18.1/CSA B125.1

Listed by UL Environment to

- GreenGuard Gold

Complies with

- ADA
- ICC/ANSI 117.1
- TAS
- NSF/ANSI 372

Serves the American Disabilities Act and ICC/ANSI 117.1 guidelines, citations 306, 308, 309.4, 606.4, 606.5 when installed according to these requirements. Consult local codes and standards.

This plumbing fixture is designed for hand washing only. It is not Intended to dispense water for human consumption through drinking or for preparation of food or beverages.

For more information on Evero Natural Quartz Surface, faucets, valves, transformers, and the soap dispensers, please visit bradleycorp.com.

Protected by one or more of the following U.S. Patents:
D625,792 S; D633,992 S; and D642,664 S.

© 2020 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Models (Must select one)

Model	Description
○ **LVGD1**	Verge Wash Basin – LVGD-Series, One-Station

Standard Selections (Must select one from each category)

Faucet Type (select one)

○ **S53-3100**	Verge Faucet – Crestt Series
○ **S53-3300**	Verge Faucet – Metro Series
○ **S53-3500**	Verge Faucet – Linea Series
○ **S53-3700**	Verge Faucet – Zen Series
○ **4" Set**	4" Centerset (1¼" Drilling Only)
○ **SHANK**	Centershank (1¼" Drilling Only)

Faucet Activation Type (select one)

○ **R**	Touch-Free Activation △
○ **NONE**	No Activation ▲

Water Supply Type (select one)

○ **T**	Thermostatic Mixing Assembly (supply hoses and shut-offs included)
○ **L**	Single Tempered Line Assembly (supply hoses and shuf-offs included)

Flow Control Type△ (select one)

○ **3**	0.35 gpm (1.30 Lpm) Silicone Tip, Multiple Individual Laminar Flow Streams
○ **5**	0.50 gpm (1.90 Lpm) Silicone Tip, Multiple Individual Laminar Flow Streams

Faucet Finish Type△ (select one)

○ **PC**	Polished Chrome
○ **BB**	Brushed Black Stainless
○ **BS**	Brushed Stainless
○ **BZ**	Brushed Bronze
○ **BR**	Brushed Brass
○ **BN**	Brushed Nickel

Grid strainer will always have a stainless steel finish.

Faucet Power Supply (select one)

○ **AC**	AC Power△**
○ **BA**	Battery△ – 4x AA alkaline batteries included per faucet
○ **NONE**	No Power Supply ▲

Soap Dispenser Type (select one)

○ **SDO**	1-3/8" Soap Drilling Only
○ **NSD**	No Soap Dispenser/No Drilling

Color of Evero® Bowl (select one)

Geo Series

○ **ANDORRA**	Andorra	○ **GLACIER**	Glacier Bay	○ **RAINIER**	Rainier
○ **ANTARCTICA**	Antarctica	○ **KALAHARI**	Kalahari	○ **SIENA**	Siena
○ **ARUBA**	Aruba	○ **MOJAVE**	Mojave	○ **SIERRA**	Sierra Madre
○ **BLACK-SEA**	Black Sea	○ **MYKONOS**	Mykonos	○ **YUKON**	Yukon
○ **DENALI**	Denali	○ **PATAGONIA**	Patagonia		

Pearl Series (available at an additional charge) (Non-cancelable, non-returnable)

○ **AKOYA**	Akoya	○ **BLACK-MOON**	Black Moon

Access Panel Type (select one)

○ **STAIN**	Stainless Steel

Waste Assembly Type (select one)

○ **S-POLY**	Single Polypropylene P-Trap
○ **S-CHROME**	Single Chrome-Plated P-Trap

** AC power supply will include either individual AC plug-in adapter or 4-way AC splitter assembly depending on configuration.

△ Available with faucet selection only.

▲ Available with faucet drilling only.

© 2020 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Dimensions for LVGD1 Verge Wash Basin **(mm)**

Top View

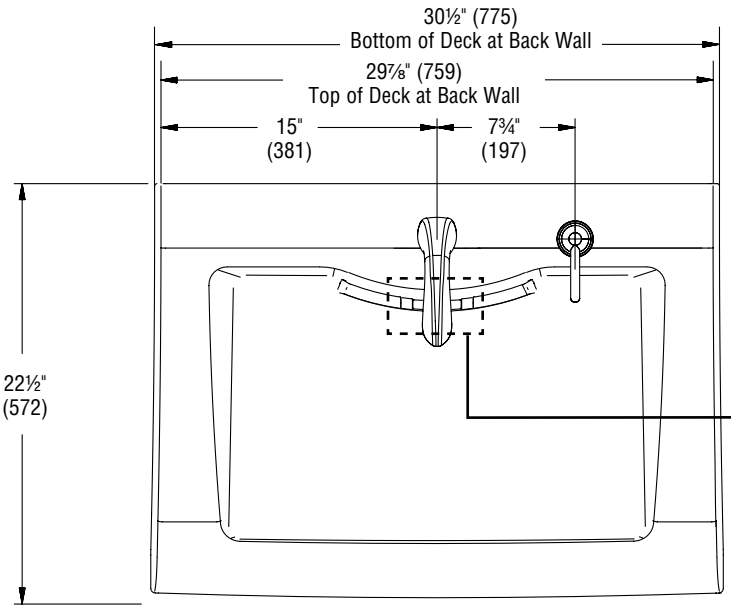

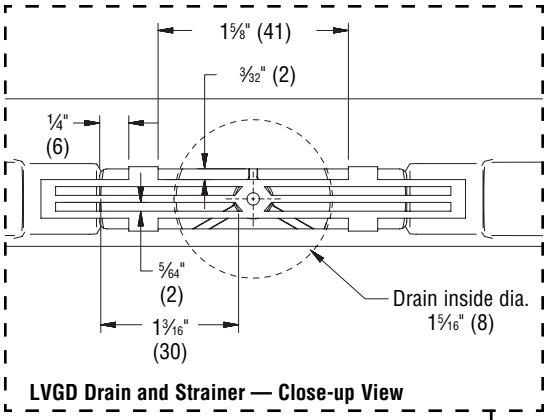

LVGD Drain and Strainer — Close-up View

Front View

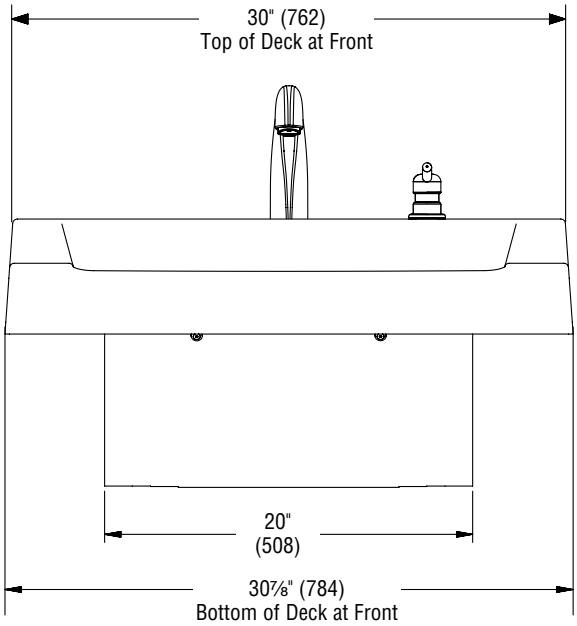

© 2020 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Dimensions for LVGD1 Verge Wash Basin **(mm)**

Standard Height

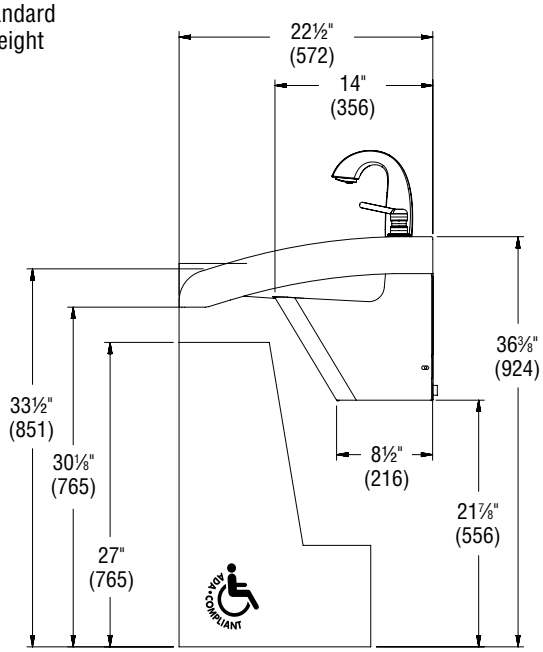

Juvenile Height

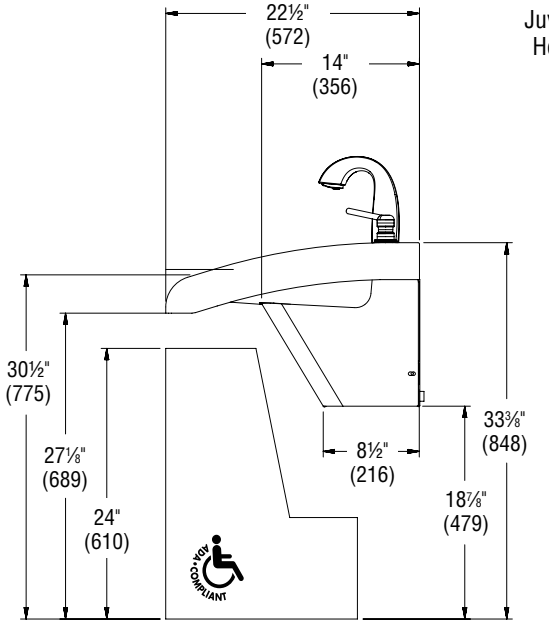

TAS, Pre-K through Grades 5 or 6

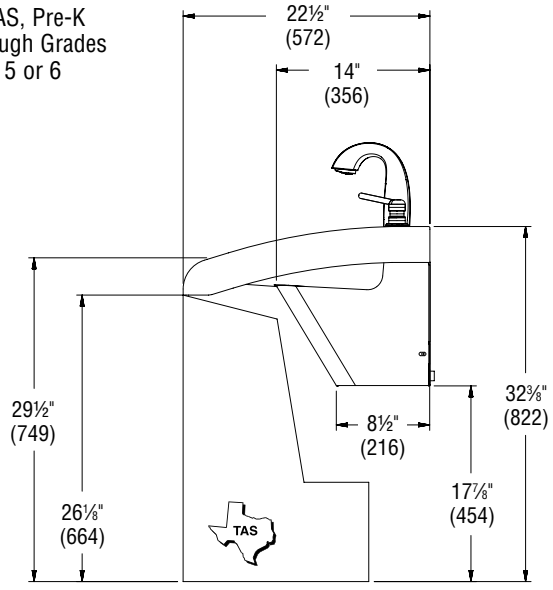

TAS, Grades 6 through 8 or 9

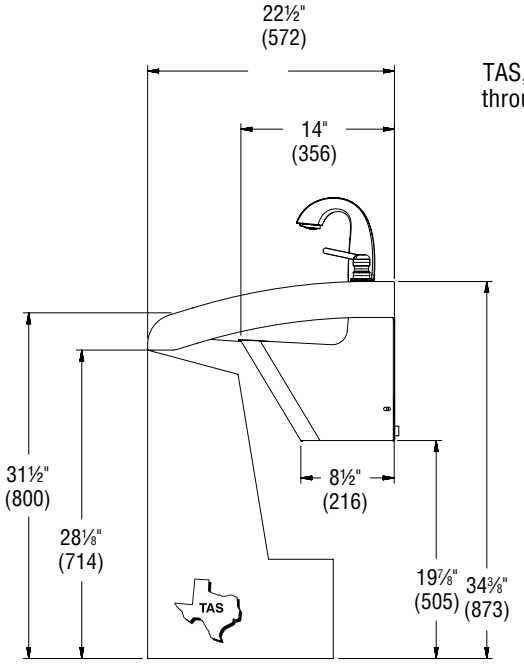

© 2020 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Rough-Ins for LVGD1 Verge Wash Basin **(mm)**

Standard rough-in shown.

Reinforce wall at points A and B.

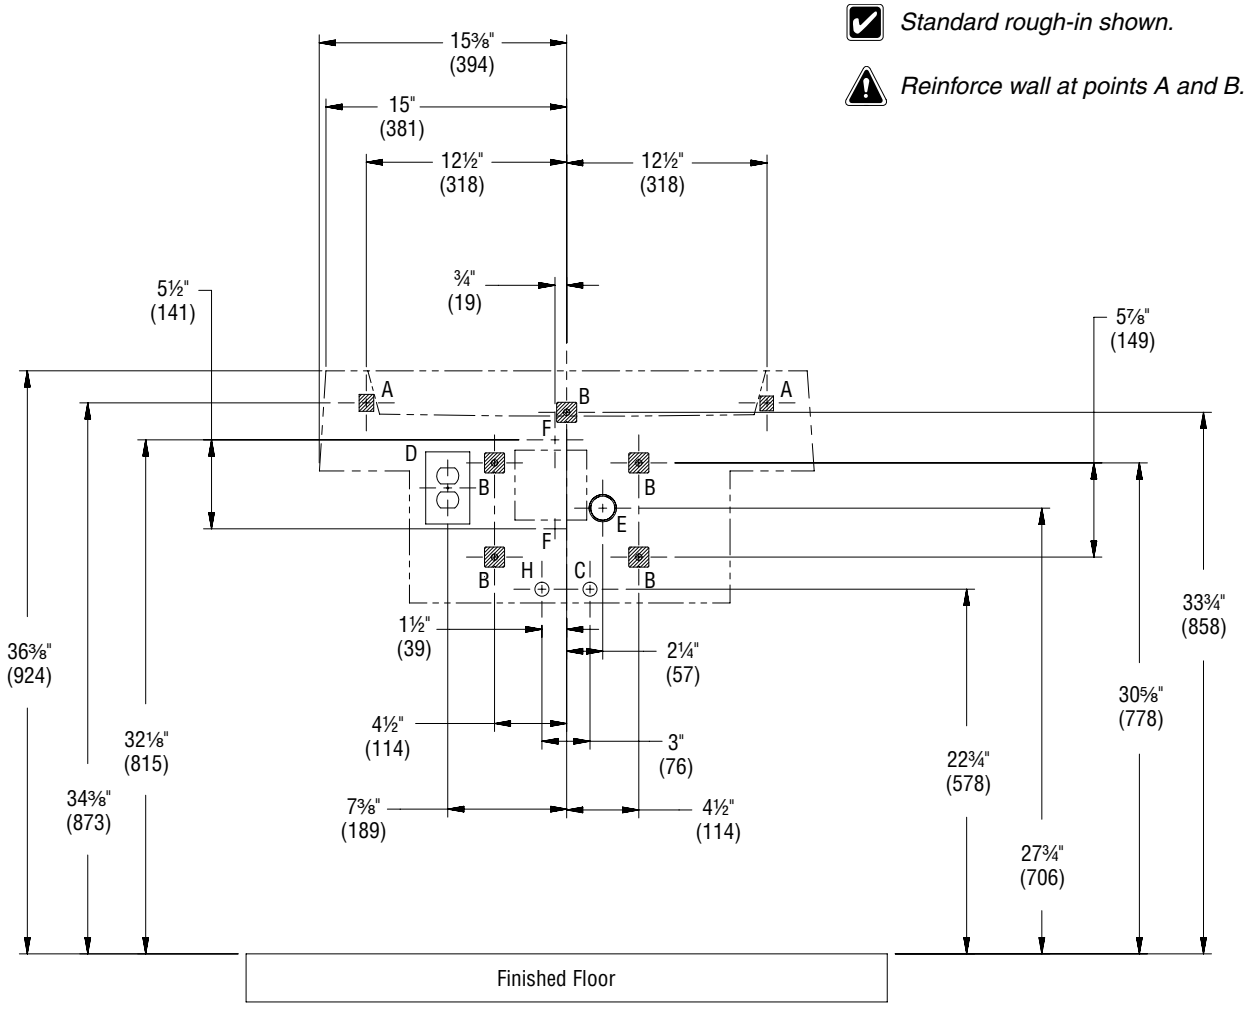

CODE	DESCRIPTION	QTY.
A	⅜" Lav Deck Bowl Anchors with a Minimum Pull-Out Force of 1,000 lb (reinforce walls at anchor points)	2
B	⅜" Lav Deck Frame Anchors with a Minimum Pull-Out Force of 1,000 lb (reinforce walls at anchor points)	5
H, C	½" Hot/Cold Supplies, Stub-Out 2" From Wall	1
D	110V GFI Protected Electrical Outlet (AC faucet and soap only)	1
E	1½" NPT Drain, Stub-Out 2" from Wall	1
F	#10 Anchors for Faucet Control Box Installation	2

RIM HEIGHT	VERTICAL HEIGHT ADJUSTMENTS FOR CODES A–E and H	FIXTURE STYLE
33½"	None	Standard Height
31½"	Subtract 2"	TAS, Grades 6 through 8 or 9
29½"	Subtract 4"	TAS, Pre-K through Grades 5 or 6
30½"	Subtract 3"	Juvenile Height

© 2020 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com