




AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, Yonkers, NY 10701
(914) 476.9000 • (914) 476.0688
www.americanspecialties.com

MODEL №: 7487

ISSUED: 15 SEP 2020

REVISED:

SURFACE MOUNTING COLLAR FOR MODEL № 0487-L/R CABINETS

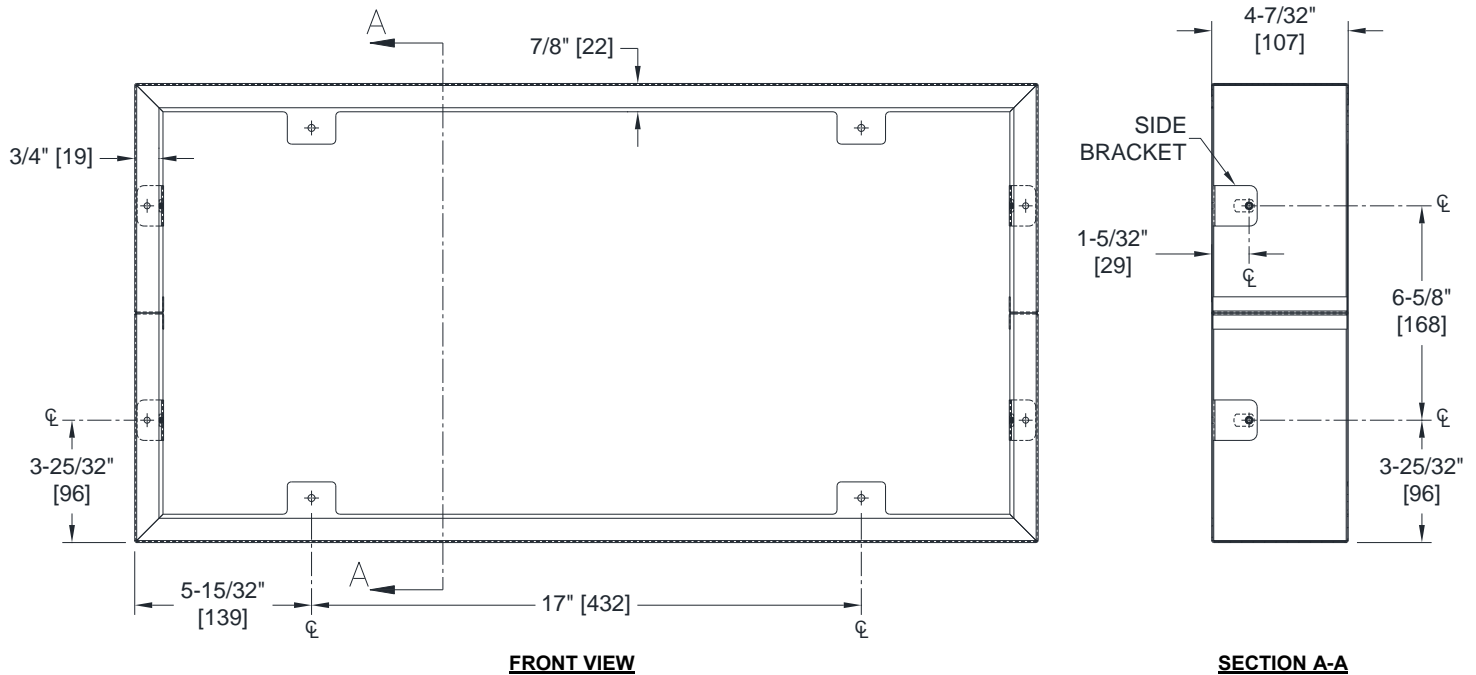

NOTE

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

SPECIFICATION

Adapter collar for Model № 0487-L/R cabinets in Surface Mounted installations shall be 22 gage type 304 stainless steel, alloy 18-8. All exposed surfaces shall have satin finish. Unit shall be protected for shipment with PVC film easily removed after installation. Unit shall be sized to fit snugly under the 1/4" [6] face flange return of the Model № 0487-L/R cabinet. There shall be no seams or miters on the corners of the collar. After installation the collar shall be **NON-REMOVABLE**.

Surface Mounting Collar for Model № 0487-L/R Cabinets shall be Model № 7487 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, NY 10701-4913

INSTALLATION

Surface mount collar on wall using four (4) № 10 self-threading Phillips pan head screws (by others) through mounting holes provided in tabs on rear frame of collar. Cabinet Model № 0487-L/R slides into installed collar and the 1/4" [6] return of the cabinet face flange fits over the installed collar. Attach Model № 0487-L/R cabinet into collar using four (4) № 10-32 x 3/8" button head hex drive screws (supplied) through concealed mounting holes (provided) in four (4) locations on the inside side walls of the cabinet. See OM & IG provided with unit for complete installation and maintenance details.

OPERATION

Surface mounting collars conveniently adapt standard recessed mounting cabinets for use on walls with insufficient depth for recessing or wall materials that would make cutouts impossible. Collar is fabricated to the specific width, height and depth size of the Model № 0487-L or 0487-R cabinet upon which it is being used.